
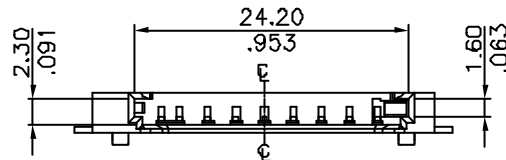
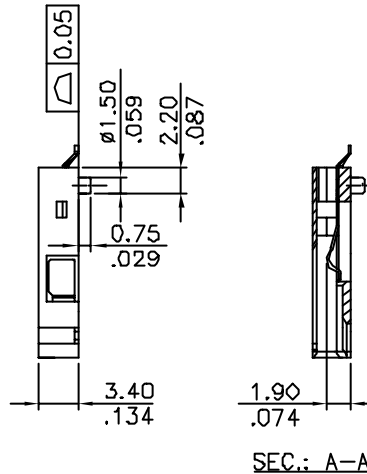


NOTES
MATERIAL
Insulator: LCP UL 94V-0
Contacts: Phosphor Bronze (t= 0.2mm)
Pad: Phosphor Bronze
(Pad A: t= 0.3mm; Pad B: t= 0.2mm)


Ordering Code:

CSD-09 G 0 0 1 0
1 2 3 4 5 6 7

- SERIES NO.
- CONTACT NUMBER: 09
- PLATING CODE:
G= Selective 5μ" Gold
over 50μ" Nickel
- Card Key orientation style:
0= Standard
- MOUNT EAR STAND OFF:
0= 0mm
- INSULATOR COLOR:
1= Color Black
- OPTION CODE:
0= Standard

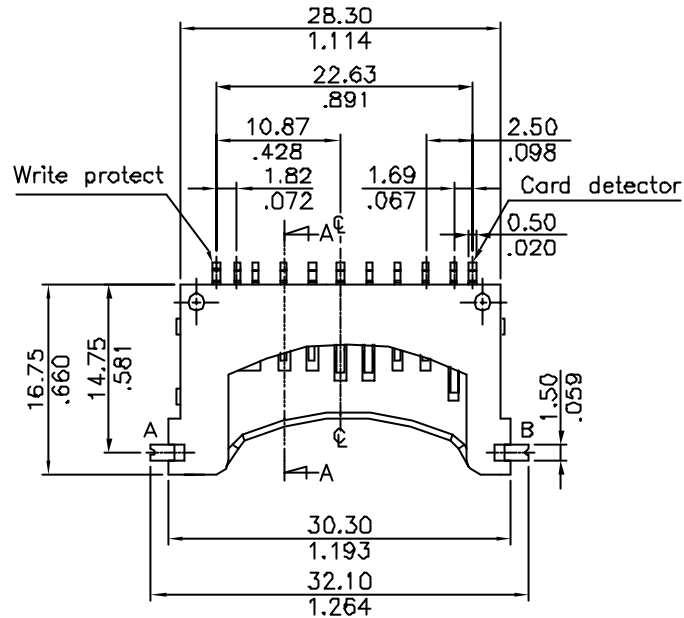

Pin No.	NAME
1	CD/DAT3
2	CMD
3	Vss1
4	VDD
5	CLK
6	Vss2
7	VAT0
8	VAT1
9	VAT2

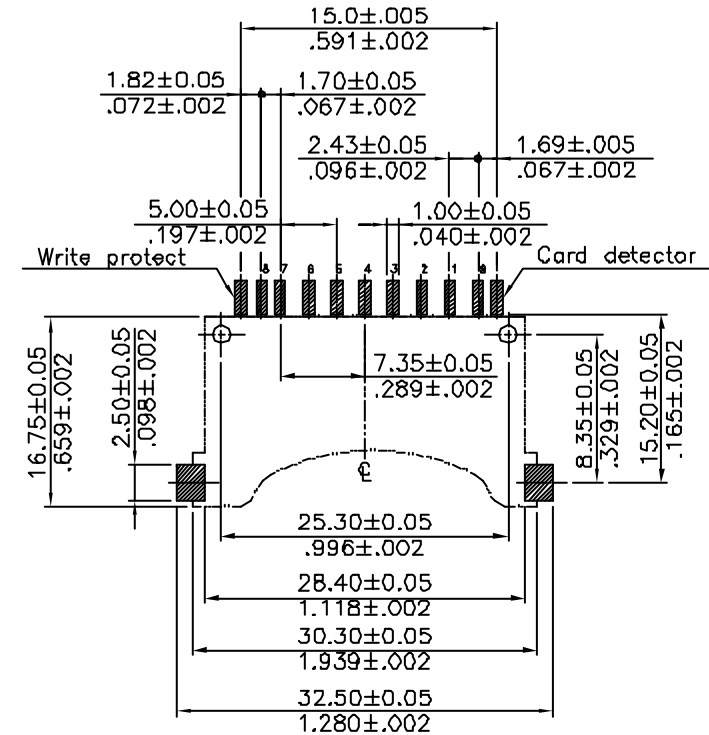

Recommended P.C.B. Layout

4					DATE	UNIT: mm / inch	TITLE: Secure Digital Connector	 瀚荃股份有限公司 CviLux Corporation			
3				DRAWN BY:		TOLERANCE UNLESS OTHERWISE SPECIFIED	CARD KEY ORIENTATION STYLE: Standard (TOP Mount)				
2				ENGINEER:		.X ± 0.30/.012 X' ± 1"	STAND OFF HEIGHTNESS: 0mm	DRAWING NO.	CSD-03SC	PART NO.	CSD-09G0*10
1	SUN	11/5/04	ECN04442	CHECKED BY:		.XX ± 0.20/.008 X' ±		SCALE	2 / 1	SHEET	1 OF 1
SYM	NAME	DATE	REVISIONS	APPROVED BY:		.XXX ± 0.10/.004 XX' ±					