

**SAM9X60 MPU, 1-Gbit DDR2-SDRAM, 4-Gbit NAND Flash,
10/100 Ethernet PHY, Power Management IC, 1-Kbit
EEPROM**



SAM9X60 SOM

Introduction

The Microchip SAM9X60 System-On-Module (SAM9X60D1G-I/LZB) is a small single-sided SOM based on a System-in-Package (SiP) ARM926EJ-S Arm® Thumb® CPU-based embedded microprocessor coupled to a 1-Gbit DDR2-SDRAM.

In addition to the SAM9X60 MPU running up to 600 MHz, the SAM9X60D1G-I/LZB embeds a 4-Gbit NAND Flash memory, a 10/100 Ethernet PHY and a dedicated power management unit.

The SAM9X60D1G-I/LZB is built on a common set of proven Microchip components to reduce time to revenue and lower risk in product design by simplifying hardware design and software development.

The SAM9X60D1G-I/LZB also limits design rules of the main application board, reducing overall PCB complexity and cost. It is supported by a free Linux® distribution and bare metal C examples.

Figure 1. SAM9X60D1G-I/LZB Overview



Features

- System-in-Package (SAM9X60D1GT-I/4FB) Including:
 - ARM926EJ-S Arm Thumb processor running up to 600 MHz
 - 1-Gbit DDR2-SDRAM
- 4-Gbit NAND Flash Memory
- On-Board Power Management Unit (MCP16501TA-E/RMB)
- 1-Kbit Serial EEPROM with EUI-48™ Node Identity (24AA025E48T-I/OT)
- 10Base-T/100Base-TX Ethernet PHY (KSZ8081RNAIA-TR)
- 24-MHz MEMS Oscillator for Main Clock Generation (DSC6102HI2B-024.0000T)
- 32.768-kHz Crystal Oscillator for Slow Clock Generation
- 25-MHz MEMS Oscillator for Ethernet Clock Generation (DSC6102HI2B-025.0000T)
- One High-Speed USB Device, Three High-Speed USB Hosts with Dedicated On-Chip Transceivers
- Shutdown and Reset Control Pins
- Up to 24-bit LCD Interface
- Up to 85 I/Os
- Independent Power Supplies Available for QSPI Memory and for Backup Depending on Voltage Domains
- Operational Conditions:
 - Main operating voltage (5V_MAIN): 3.3V to 5.5V ± 5%
 - Module ambient temperature range (T_A): -40°C to 85°C
- Package:
 - 28 x 28 mm, 152-pin, 0.65 mm pad pitch module, solderable manually for prototyping

Applications

- Industrial Control and Automation
- Smart Appliances
- Human Machine Interfaces (HMI)
- IoT Gateways
- Access Control Panels
- Security and Alarm Systems

1. Reference Documents

The following documents are available on www.microchip.com:

Table 1-1. Reference Data Sheets

Type	Document Title	Reference No.
Data sheet	SAM9X60 SIP	60001580
Data sheet	KSZ8081RNA/RND	00002199
Data sheet	24AA025E48	20002124
Data sheet	MCP16501	20006388
Data sheet	DSC61XXB	20006155

2. Description

The Microchip SAM9X60D1G-I/LZB is a high-performance System-On-Module based on ultra-low power ARM926EJ-S CPU-based embedded microprocessor (MPU) SAM9X60. The SAM9X60D1G-I/LZB is certified for industrial operating conditions over industrial temperature range [-40°C to 85°C].

The SAM9X60D1G-I/LZB operates at a maximum CPU operating frequency of 600 MHz and a maximum bus speed of 200 MHz. It features up to:

- 1 Gbit of DDR2-SDRAM memory (SAM9X60D1GT-I/4FB)
- 4 Gbits of NAND Flash memory
- 1 Kbit of EEPROM memory with EUI-48 Node Identity (24AA025E48T-I/OT)


The SAM9X60D1G-I/LZB is a 152-pin, 0.65-mm pad pitch module, 28 mm x 28 mm in size.

The SAM9X60D1G-I/LZB offers an extensive peripheral set, including high-speed USB host and device, 10Base-T/100Base-TX Ethernet interface, system control and up to 85 I/Os featuring:

- Up to 11 FLEXCOMs
- Up to 6 ADC inputs
- Up to 2 CAN interfaces
- Up to 2 SD/MMC, SDIO Interfaces
- Up to 4 PWM interfaces
- Up to 11 wake-ups
- Serial interfaces such as QSPI, SSC and I²S
- LCD RGB interface up to 24 bits
- CMOS camera interface
- Half-bridge class-D stereo

3. Block Diagram


Figure 3-1. SAM9X60D1G-I/LZB Block Diagram

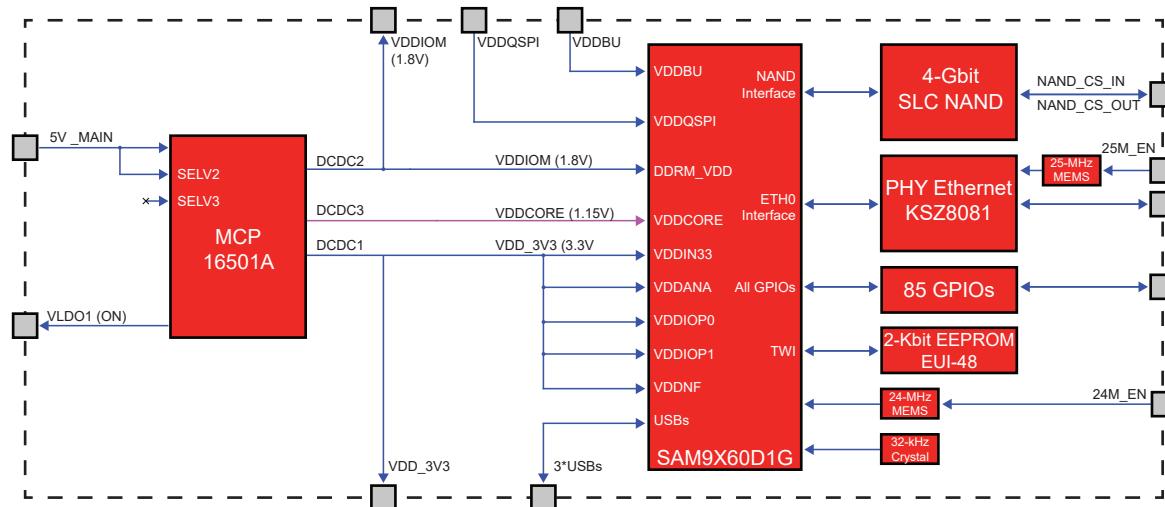

4. Pinout

4.1 Pinout Overview

Figure 4-1. SAM9X60D1G-I/LZB Pin Assignment

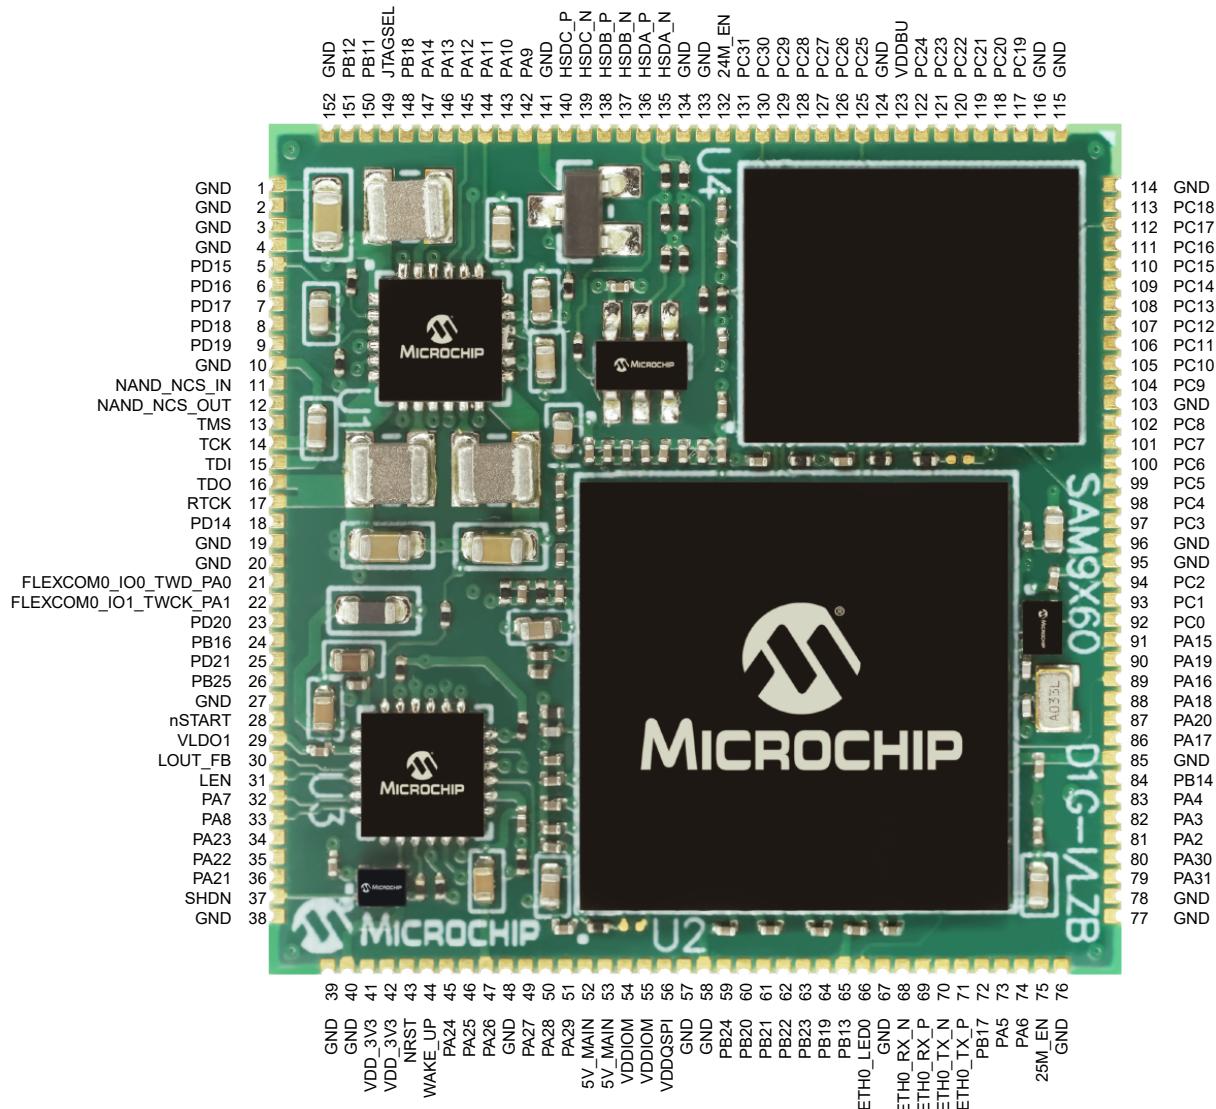

4.2 Pin List

The following tables provide the SAM9X60D1G-I/LZB pin description.



Important: Compared to the SAM9X60 SiP (SAM9X60D1G), some PIO features are not listed. These features are reserved for internal use on the SAM9X60D1G-I/LZB and cannot be accessed externally for other uses.

The device features several PIO controllers that multiplex the I/O lines of the peripheral set. The following PIOx Pin Description tables define how the I/O lines are multiplexed on the different PIO controllers. The "Reset State" column shows whether the PIO line resets in I/O mode or in Peripheral

mode. If I/O is shown, the PIO line resets with the characteristics (input, output, pull-up or pull-down) indicated in this same column, so that the device is configured in a known state as soon as the reset is released. As a result, PIO_CFG.RFUNC resets to '0'. If a signal name is shown in the "Reset State" column, the PIO line is assigned to this function and PIO_CFG.RFUNC is not set to '0'. That is the case for pins controlling memories, in particular address lines, which require the pin to be driven as soon as the reset is released.

4.2.1 PIOA Pin List

Table 4-1. PIOA Pin Description

Pad No.	Power Rail	I/O Type	Primary		Alternate		PIO Peripheral			Reset State	Note
			Signal	Dir	Signal	Dir	Func	Signal	Dir		
21	VDDIOP0	GPIO	PA0	I/O	-	-	A	FLEXCOM0_IO0	I/O	PIO, I, PU, ST	1, 3
22	VDDIOP0	GPIO	PA1	I/O	-	-	A	FLEXCOM0_IO1	I/O	PIO, I, PU, ST	1, 3
81	VDDIOP0	GPIO	PA2	I/O	WKUP1	-	B	SDMMC1_DAT1	I/O	PIO, I, PU, ST	2
82	VDDIOP0	GPIO	PA3	I/O	-	-	B	SDMMC1_DAT2	I/O	PIO, I, PU, ST	2
83	VDDIOP0	GPIO	PA4	I/O	-	-	B	SDMMC1_DAT3	I/O	PIO, I, PU, ST	2
73	VDDIOP0	GPIO	PA5	I/O	-	-	A	FLEXCOM1_IO0	I/O	PIO, I, PU, ST	-
							B	CANTX1	O		
74	VDDIOP0	GPIO	PA6	I/O	-	-	A	FLEXCOM1_IO1	I/O	PIO, I, PU, ST	-
							B	CANRX1	I		
							A	FLEXCOM2_IO0	I/O		
32	VDDIOP0	GPIO	PA7	I/O	-	-	B	FLEXCOM4_IO4	O	PIO, I, PU, ST	-
							C	FLEXCOM5_IO4	O		
							A	FLEXCOM2_IO1	I/O		
33	VDDIOP0	GPIO	PA8	I/O	-	-	B	FLEXCOM5_IO3	I/O	PIO, I, PU, ST	-
							C	FLEXCOM4_IO5	O		
142	VDDIOP0	GPIO	PA9	I/O	WKUP2	-	A	DRXD	I	PIO, I, PU, ST	-
							B	CANRX0	I		
143	VDDIOP0	GPIO	PA10	I/O	WKUP3	-	A	DTXD	O	PIO, I, PU, ST	-
							B	CANTX0	O		
							A	FLEXCOM4_IO1	I/O		
144	VDDIOP0	GPIO	PA11	I/O	-	-	B	SDMMC1_DAT0	I/O	PIO, I, PU, ST	-
							A	FLEXCOM4_IO0	I/O		
145	VDDIOP0	GPIO	PA12	I/O	-	-	B	SDMMC1_CMD	I/O	PIO, I, PU, ST	-
							A	FLEXCOM4_IO2	I/O	PIO, I, PU, ST	-
							B	SDMMC1_CK	I/O		
147	VDDIOP0	GPIO	PA14	I/O	-	-	A	FLEXCOM4_IO3	I/O	PIO, I, PU, ST	-
91	VDDIOP0	GPIO	PA15	I/O	-	-	A	SDMMC0_DAT0	I/O	PIO, I, PU, ST	-
89	VDDIOP0	GPIO	PA16	I/O	-	-	A	SDMMC0_CMD	I/O	PIO, I, PU, ST	-
86	VDDIOP0	GPIO	PA17	I/O	-	-	A	SDMMC0_CK	I/O	PIO, I, PU, ST	-

.....continued

Pad No.	Power Rail	I/O Type	Primary		Alternate		PIO Peripheral			Reset State	Note
			Signal	Dir	Signal	Dir	Func	Signal	Dir		
88	VDDIOP0	GPIO	PA18	I/O	-	-	A	SDMMC0_DAT1	I/O	PIO, I, PU, ST	-
90	VDDIOP0	GPIO	PA19	I/O	-	-	A	SDMMC0_DAT2	I/O	PIO, I, PU, ST	-
87	VDDIOP0	GPIO	PA20	I/O	-	-	A	SDMMC0_DAT3	I/O	PIO, I, PU, ST	-
36	VDDIOP0	GPIO	PA21	I/O	-	-	A	TIOA0	I/O	PIO, I, PU, ST	-
							B	FLEXCOM5_IO1	I/O		
35	VDDIOP0	GPIO	PA22	I/O	-	-	A	TIOA1	I/O	PIO, I, PU, ST	-
							B	FLEXCOM5_IO0	I/O		
34	VDDIOP0	GPIO	PA23	I/O	-	-	A	TIOA2	I/O	PIO, I, PU, ST	-
							B	FLEXCOM5_IO2	I/O		
							A	TCLK0	I	PIO, I, PU, ST	-
45	VDDIOP0	GPIO	PA24	I/O	-	-	B	TK	I/O		
							C	CLASSD_L0	O		
							A	TCLK1	I	PIO, I, PU, ST	-
46	VDDIOP0	GPIO	PA25	I/O	-	-	B	TF	I/O		
							C	CLASSD_L1	O		
							A	TCLK2	I	PIO, I, PU, ST	-
47	VDDIOP0	GPIO	PA26	I/O	-	-	B	TD	O		
							C	CLASSD_L2	O		
							A	TIOB0	I/O	PIO, I, PU, ST	-
49	VDDIOP0	GPIO	PA27	I/O	-	-	B	RD	I		
							C	CLASSD_L3	O		
50	VDDIOP0	GPIO	PA28	I/O	WKUP4	-	A	TIOB1	I/O	PIO, I, PU, ST	-
							B	RK	I/O		
							A	TIOB2	I/O		
51	VDDIOP0	GPIO	PA29	I/O	-	-	B	RF	I/O	PIO, I, PU, ST	-
							C	FLEXCOM2_IO7	I		
							A	FLEXCOM6_IO0	I/O		
80	VDDIOP0	GPIO	PA30	I/O	-	-	B	FLEXCOM5_IO6	O	PIO, I, PU, ST	2
							A	FLEXCOM6_IO1	I/O	PIO, I, PU, ST	2
79	VDDIOP0	GPIO	PA31	I/O	-	-	B	FLEXCOM5_IO5	O	PIO, I, PU, ST	2

Notes:

1. Fixed feature due to the SAM9X60D1G-I/LZB internal connection.
2. Limited feature compared to SAM9X60D1G due to the use of a part of the functionality for other features in the SAM9X60D1G-I/LZB, for example GMAC or FLEXCOM.
3. The signal is internally pulled up with a 4.7 kΩ resistor.

4.2.2 PIOB Pin List

Table 4-2. PIOB Pin Description

Pad No.	Power Rail	I/O Type	Primary		Alternate		PIO Peripheral			Reset State	Note
			Signal	Dir	Signal	Dir	Func	Signal	Dir		
--	VDDANA	GPIO	PB0	I/O	-	-	A	E0_RX0	I	PIO, I, PU, ST	1
--	VDDANA	GPIO	PB1	I/O	-	-	A	E0_RX1	I	PIO, I, PU, ST	1
--	VDDANA	GPIO	PB2	I/O	-	-	A	E0_RXER	I	PIO, I, PU, ST	1
--	VDDANA	GPIO	PB3	I/O	-	-	A	E0_RXDV	I	PIO, I, PU, ST	1
--	VDDANA	GPIO	PB4	I/O	-	-	A	E0_TXCK	I/O	PIO, I, PU, ST	1
--	VDDANA	GPIO	PB5	I/O	-	-	A	E0_MDIO	I/O	PIO, I, PU, ST	1
--	VDDANA	GPIO	PB6	I/O	-	-	A	E0_MDC	O	PIO, I, PU, ST	1
--	VDDANA	GPIO	PB7	I/O	-	-	A	E0_TXEN	O	PIO, I, PU, ST	1
--	VDDANA	GPIO	PB8	I/O	-	-	-	-	I	PIO, I, PU, ST	1
--	VDDANA	GPIO	PB9	I/O	-	-	A	E0_TX0	O	PIO, I, PU, ST	1
--	VDDANA	GPIO	PB10	I/O	-	-	A	E0_TX1	O	PIO, I, PU, ST	1
150	VDDANA	GPIO	PB11	I/O	AD0	-	B	PWM0	O	PIO, I, PU, ST	2
151	VDDANA	GPIO	PB12	I/O	AD1	-	B	PWM1	O	PIO, I, PU, ST	2
65	VDDANA	GPIO	PB13	I/O	AD2	-	B	PWM2	O	PIO, I, PU, ST	2
84	VDDANA	GPIO	PB14	I/O	AD3	-	B	PWM3	O	PIO, I, PU, ST	2
-	VDDANA	GPIO	PB15	I/O	AD4	-	-	-	-	PIO, I, PU, ST	2
24	VDDANA	GPIO	PB16	I/O	AD5	-	-	-	-	PIO, I, PU, ST	2
72	VDDANA	GPIO	PB17	I/O	AD6	-	-	-	-	PIO, I, PU, ST	2
148	VDDANA	GPIO	PB18	I/O	WKUP7	-	A	IRQ	I	PIO, I, PU, ST	-
							B	ADTRG	I		
							A	QSCK	O		
64	VDDQSPI	GPIO	PB19	I/O	-	-	B	I2SMCC_CK	I/O	PIO, I, PU, ST	-
							C	FLEXCOM11_IO0	I/O		
60	VDDQSPI	GPIO	PB20	I/O	-	-	A	QCS	O	PIO, I, PU, ST	-
							B	I2SMCC_WS	I/O		
							C	FLEXCOM11_IO1	I/O		

.....continued

Pad No.	Power Rail	I/O Type	Primary		Alternate		PIO Peripheral			Reset State	Note
			Signal	Dir	Signal	Dir	Func	Signal	Dir		
61	VDDQSPI	GPIO	PB21	I/O	-	-	A	QIO0	I/O	Signal, Dir, PU, PD, HiZ, ST, SEC, FILTER	PIO, I, PU, ST
							B	I2SMCC_DIN0	I		
							C	FLEXCOM12_IO0	I/O		
62	VDDQSPI	GPIO	PB22	I/O	-	-	A	QIO1	I/O	Signal, Dir, PU, PD, HiZ, ST, SEC, FILTER	PIO, I, PU, ST
							B	I2SMCC_DOUT0	O		
							C	FLEXCOM12_IO1	I/O		
63	VDDQSPI	GPIO	PB23	I/O	-	-	A	QIO2	I/O	Signal, Dir, PU, PD, HiZ, ST, SEC, FILTER	PIO, I, PU, ST
							B	I2SMCC_MCK	O		
59	VDDQSPI	GPIO	PB24	I/O	-	-	A	QIO3	I/O	Signal, Dir, PU, PD, HiZ, ST, SEC, FILTER	PIO, I, PU, ST
26	VDDIOP0	GPIO	PB25	I/O	WKUP8	-	A	NRST_OUT	O	NRST_OUT , O, PD	-
							B	NTRST	I		

Notes:

1. Fixed feature due to the SAM9X60D1G-I/LZB internal connection.
2. Limited feature compared to SAM9X60D1G due to the use of a part of the functionality for other features in the SAM9X60D1G-I/LZB, for example GMAC or FLEXCOM.

4.2.3 PIOC Pin List

Table 4-3. PIOC Pin Description

Pad No.	Power Rail	I/O Type	Primary		Alternate		PIO Peripheral			Reset State
			Signal	Dir	Signal	Dir	Func	Signal	Dir	
92	VDDIOP1	GPIO	PC0	I/O	-	-	A	LCDDAT0	O	Signal, Dir, PU, PD, HiZ, ST, SEC, FILTER
							B	ISI_D0	I	
							C	FLEXCOM7_IO0	I/O	
93	VDDIOP1	GPIO	PC1	I/O	-	-	A	LCDDAT1	O	Signal, Dir, PU, PD, HiZ, ST, SEC, FILTER
							B	ISI_D1	I	
							C	FLEXCOM7_IO1	I/O	
94	VDDIOP1	GPIO	PC2	I/O	-	-	A	LCDDAT2	O	Signal, Dir, PU, PD, HiZ, ST, SEC, FILTER
							B	ISI_D2	I	
							C	TIOA3	I/O	
97	VDDIOP1	GPIO	PC3	I/O	-	-	A	LCDDAT3	O	Signal, Dir, PU, PD, HiZ, ST, SEC, FILTER
							B	ISI_D3	I	
							C	TIOB3	I/O	
98	VDDIOP1	GPIO	PC4	I/O	-	-	A	LCDDAT4	O	Signal, Dir, PU, PD, HiZ, ST, SEC, FILTER
							B	ISI_D4	I	
							C	TCLK3	I	

.....continued

Pad No.	Power Rail	I/O Type	Primary		Alternate		PIO Peripheral			Reset State
			Signal	Dir	Signal	Dir	Func	Signal	Dir	
99	VDDIOP1	GPIO	PC5	I/O	-	-	A	LCDDAT5	O	PIO, I, PU, ST
							B	ISI_D5	I	
							C	TIOA4	I/O	
100	VDDIOP1	GPIO	PC6	I/O	-	-	A	LCDDAT6	O	PIO, I, PU, ST
							B	ISI_D6	I	
							C	TIOB4	I/O	
101	VDDIOP1	GPIO	PC7	I/O	-	-	A	LCDDAT7	O	PIO, I, PU, ST
							B	ISI_D7	I	
							C	TCLK4	I	
102	VDDIOP1	GPIO	PC8	I/O	-	-	A	LCDDAT8	O	PIO, I, PU, ST
							B	ISI_D8	I	
							C	FLEXCOM9_IO0	I/O	
104	VDDIOP1	GPIO	PC9	I/O	-	-	A	LCDDAT9	O	PIO, I, PU, ST
							B	ISI_D9	I	
							C	FLEXCOM9_IO1	I/O	
105	VDDIOP1	GPIO	PC10	I/O	-	-	A	LCDDAT10	O	PIO, I, PU, ST
							B	ISI_D10	I	
							C	PWM0	O	
106	VDDIOP1	GPIO	PC11	I/O	-	-	A	LCDDAT11	O	PIO, I, PU, ST
							B	ISI_D11	I	
							C	PWM1	O	
107	VDDIOP1	GPIO	PC12	I/O	-	-	A	LCDDAT12	O	PIO, I, PU, ST
							B	ISI_PCK	I	
							C	TIOA5	I/O	
108	VDDIOP1	GPIO	PC13	I/O	-	-	A	LCDDAT13	O	PIO, I, PU, ST
							B	ISI_VSYNC	I	
							C	TIOB5	I/O	
109	VDDIOP1	GPIO	PC14	I/O	-	-	A	LCDDAT14	O	PIO, I, PU, ST
							B	ISI_HSYNC	I	
							C	TCLK5	I	
110	VDDIOP1	GPIO	PC15	I/O	-	-	A	LCDDAT15	O	PIO, I, PU, ST
							B	ISI_MCK	O	
							C	PCK0	O	
111	VDDIOP1	GPIO	PC16	I/O	-	-	A	LCDDAT16	O	PIO, I, PU, ST
							B	E1_RXER	I	
							C	FLEXCOM10_IO0	I/O	
112	VDDIOP1	GPIO	PC17	I/O	-	-	A	LCDDAT17	O	PIO, I, PU, ST
							B	FLEXCOM1_IO7	I	
							C	FLEXCOM10_IO1	I/O	
113	VDDIOP1	GPIO	PC18	I/O	-	-	A	LCDDAT18	O	PIO, I, PU, ST
							B	E1_TX0	O	
							C	PWM0	O	
117	VDDIOP1	GPIO	PC19	I/O	-	-	A	LCDDAT19	O	PIO, I, PU, ST
							B	E1_TX1	O	
							C	PWM1	O	
118	VDDIOP1	GPIO	PC20	I/O	-	-	A	LCDDAT20	O	PIO, I, PU, ST
							B	E1_RX0	I	
							C	PWM2	O	

.....continued

Pad No.	Power Rail	I/O Type	Primary		Alternate		PIO Peripheral			Reset State	
			Signal	Dir	Signal	Dir	Func	Signal	Dir		
119	VDDIOP1	GPIO	PC21	I/O	-	-	A	LCDDAT21	O	PIO, I, PU, ST	
							B	E1_RX1	I		
							C	PWM3	O		
120	VDDIOP1	GPIO	PC22	I/O	-	-	A	LCDDAT22	O	PIO, I, PU, ST	
							B	FLEXCOM3_IO0	I/O		
121	VDDIOP1	GPIO	PC23	I/O	-	-	A	LCDDAT23	O	PIO, I, PU, ST	
							B	FLEXCOM3_IO1	I/O		
122	VDDIOP1	GPIO	PC24	I/O	WKUP9		A	LCDDISP	O	PIO, I, PU, ST	
							B	FLEXCOM3_IO4	O		
125	VDDIOP1	GPIO	PC25	I/O	WKUP10		A	-	-	PIO, I, PU, ST	
							B	FLEXCOM3_IO3	I/O		
126	VDDIOP1	GPIO	PC26	I/O	-	-	A	LCDPWM	O	PIO, I, PU, ST	
							B	FLEXCOM3_IO2	I/O		
127	VDDIOP1	GPIO	PC27	I/O	-	-	A	LCDVSYNC	O	PIO, I, PU, ST	
							B	E1_TXEN	O		
							C	FLEXCOM1_IO4	O		
128	VDDIOP1	GPIO	PC28	I/O	-	-	A	LCDHSYNC	O	PIO, I, PU, ST	
							B	E1_CRSDV	I		
							C	FLEXCOM1_IO3	I/O		
129	VDDIOP1	GPIO	PC29	I/O	-	-	A	LCDDEN	O	PIO, I, PU, ST	
							B	E1_TXCK	I/O		
							C	FLEXCOM1_IO2	I/O		
130	VDDIOP1	GPIO	PC30	I/O	-	-	A	LCDPCK	O	PIO, I, PU, ST	
							B	E1_MDC	O		
							C	FLEXCOM3_IO7	I		
131	VDDIOP1	GPIO	PC31	I/O	WKUP11		A	FIQ	I	PIO, I, PU, ST	
							B	E1_MDIO	I/O		
							C	PCK1	O		

4.2.4 PIOD Pin List

Table 4-4. PIOD Pin Description

Pad No.	Power Rail	I/O Type	Primary		Alternate		PIO Peripheral			Reset State	Note
			Signal	Dir	Signal	Dir	Func	Signal	Dir		
--	VDDNF	GPIO	PD0	I/O	-	-	A	NANDOE	O	PIO, I, PU, ST	1
--	VDDNF	GPIO	PD1	I/O	-	-	A	NANDWE	O	PIO, I, PU, ST	1
--	VDDNF	GPIO	PD2	I/O	-	-	A	A21/NANDALE	O	A21,O, PD, ST	1
--	VDDNF	GPIO	PD3	I/O	-	-	A	A22/NANDCLE	O	A22,O, PD	1
12	VDDNF	GPIO	PD4	I/O	-	-	A	NCS3/NANDCS	O	PIO, I, PU, ST	1

.....continued

Pad No.	Power Rail	I/O Type	Primary		Alternate		PIO Peripheral			Reset State	Note
			Signal	Dir	Signal	Dir	Func	Signal	Dir		
--	VDDNF	GPIO	PD5	I/O	-	-	A	NWAIT	I	PIO, I, PU, ST	1
--	VDDNF	GPIO	PD6	I/O	-	-	A	D16	I/O	PIO, I, PU, ST	1
--	VDDNF	GPIO	PD7	I/O	-	-	A	D17	I/O	PIO, I, PU, ST	1
--	VDDNF	GPIO	PD8	I/O	-	-	A	D18	I/O	PIO, I, PU, ST	1
--	VDDNF	GPIO	PD9	I/O	-	-	A	D19	I/O	PIO, I, PU, ST	1
--	VDDNF	GPIO	PD10	I/O	-	-	A	D20	I/O	PIO, I, PU, ST	1
--	VDDNF	GPIO	PD11	I/O	-	-	A	D21	I/O	PIO, I, PU, ST	1
--	VDDNF	GPIO	PD12	I/O	-	-	A	D22	I/O	PIO, I, PU, ST	1
--	VDDNF	GPIO	PD13	I/O	-	-	A	D23	I/O	PIO, I, PU, ST	1
18	VDDNF	GPIO	PD14	I/O	-	-	-	-	-	PIO, I, PU, ST	2
5	VDDNF	GPIO	PD15	I/O	-	-	-	-	-	A20, O, PD	2
6	VDDNF	GPIO	PD16	I/O	-	-	-	-	-	A23, O, PD	2
7	VDDNF	GPIO	PD17	I/O	WKUP12	-	-	-	-	A24, O, PD	2
8	VDDNF	GPIO	PD18	I/O	WKUP13	-	-	-	-	A25, O, PD	2
9	VDDNF	GPIO	PD19	I/O	-	-	-	-	-	PIO, I, PU, ST	2
23	VDDNF	GPIO	PD20	I/O	-	-	-	-	-	PIO, I, PU, ST	2
25	VDDNF	GPIO	PD21	I/O	-	-	-	-	-	PIO, I, PU, ST	2

Notes:

1. Fixed feature due to the SAM9X60D1G-I/LZB internal connection.
2. Limited feature compared to SAM9X60D1G due to the use of a part of the functionality for other features in the SAM9X60D1G-I/LZB, for example GMAC or FLEXCOM.

4.2.5 System Pin List

Table 4-5. System Pin Description

Pin No.	Pin Name	Power Rail	I/O Type	Description	Note
136	HSDA_P	VDD_3V3	I/O	USB host port A high-speed data +	-
135	HSDA_N	VDD_3V3	I/O	USB host port A high-speed data -	-
138	HSDB_P	VDD_3V3	I/O	USB host port B high-speed data +	-
137	HSDB_N	VDD_3V3	I/O	USB host port B high-speed data -	-
140	HSDC_P	VDD_3V3	I/O	USB host port C high-speed data +	-
139	HSDC_N	VDD_3V3	I/O	USB host port C high-speed data -	-
44	WKUP0	VDDBU	I	Wake-up input	2

.....continued

Pin No.	Pin Name	Power Rail	I/O Type	Description	Note
37	SHDN	VDDBU	O	Shutdown control	-
149	JTAGSEL	VDDBU	I	JTAG selection	-
14	TCK	VDD_3V3	I	Test clock	-
15	TDI	VDD_3V3	I	Test data in	-
16	TDO	VDD_3V3	O	Test data out	-
13	TMS	VDD_3V3	I	Test mode select	-
17	RTCK	VDD_3V3	O	Return test clock	-
43	NRST	VDD_3V3	I/O	External nReset input/output	1
28	NSTART	5V_MAIN	I/PU	Start event input. Drive to low to initiate a start-up sequence.	-
30	LOUT_FB	VLDO1	I	LDO feedback pin. Connect to external resistor divider to VLDO1 for output voltage adjustment.	-
31	LEN	5V_MAIN	I	VLDO1 enable input	-
68	ETH0_RX_N	-	I/O	Physical receive or transmit signal (- differential)	-
69	ETH0_RX_P	-	I/O	Physical receive or transmit signal (+ differential)	-
70	ETH0_TX_N	-	I/O	Physical transmit or receive signal (- differential)	-
71	ETH0_TX_P	-	I/O	Physical transmit or receive signal (+ differential)	-
66	ETH0_LED0	-	I/PU/O	Programmable LED0 output	1
132	24M_EN	VDD_3V3	I	24-MHz MEMS oscillator input pin used for main clock	-
75	25M_EN	VDD_3V3	I	25-MHz MEMS oscillator input pin used for Ethernet clock	-
11	NAND_CS_IN	VDD_3V3	I	NAND Flash chip select input. Connect to pin 12.	1

Notes:

1. The signal is internally pulled up with a 10 kΩ resistor.
2. The signal is internally pulled up with a 100 kΩ resistor.

4.2.6 Power Pin List

Table 4-6. Power Pin Description

Pin No.	Pin Name	Power Rail	Type	Description
54, 55	VDDIOM	VDDIOM	Output power	1.8V memory voltage output
52, 53	5V_MAIN	5V_MAIN	Input power	5V main input supply
123	VDDBU	VDDBU	Input power	Backup voltage input
41, 42	VDD_3V3	VDD_3V3	Output power	3.3V I/Os voltage output
29	VLDO1	VLDO1	Output power	Adjustable LDO voltage output
56	VDDQSPI	VDDQSPI	Input power	QSPI voltage input
1, 2, 3, 4, 10, 19, 20, 27, 38, 39, 40, 48, 57, 58, 67, 76, 77, 78, 85, 95, 96, 103, 114, 115, 116, 124, 133, 134, 141, 152	GND	Ground	Ground	Ground connection

5. Power Considerations

5.1 Power Supplies

Table 5-1. SAM9X60D1G-I/LZB Power Supplies


Pin No.	Name	Power Type	Voltage Range	Output Current Capability	Power Domains
123	VDBBU	Input	See Note (1)	-	Backup supply input
56	VDDQSPI	Input	See Note (1)	-	QSPI supply input
41, 42	VDD_3V3	Output	3.3V ± 2%	600 mA	I/O supply and customer application output
54, 55	VDDIOM	Output	1.8V ± 2%	600 mA	DDR memory supply and customer application output
52, 53	5V_MAIN	Input	See Note (1)	-	System input power
29	VLDO1	Output	[0.9V - 3.7V] - 3.3V	300 mA	Adjustable output depending on application settings

Note:

1. See voltage range in [Recommended Operating Conditions](#).

The SAM9X60D1G-I/LZB System-On-Module is supplied by a unique input (5V_MAIN) and its internal supplies are all delivered by a power management unit (MCP16501), as shown in the Power Architecture diagram below.

Figure 5-1. SAM9X60D1G-I/LZB Power Architecture

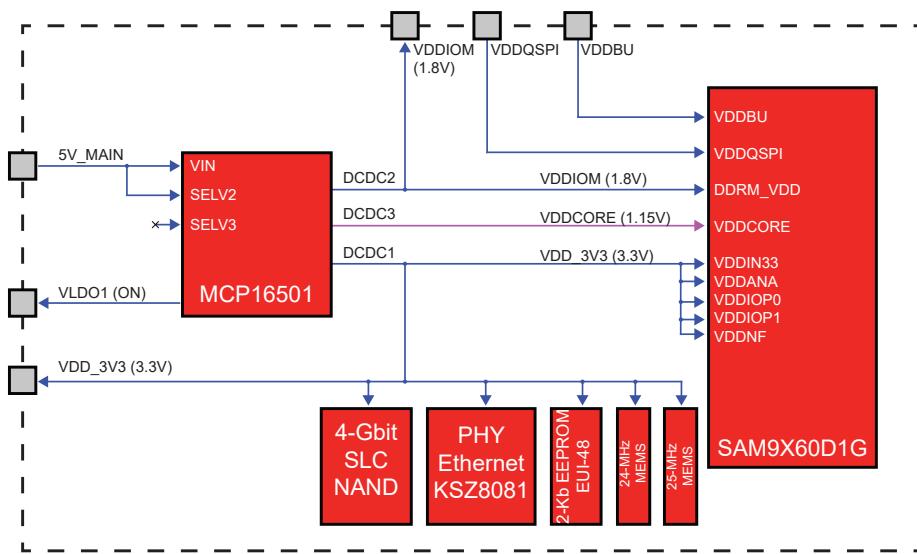

5.2 Power-Up/Down Considerations

At power-up, from a power supply sequencing perspective, the SAM9X60D1G-I/LZB power supplies are categorized into five independent groups:

- 5V_MAIN (main supply)

- VDDBU (backup group)
- VDD_3V3 (periphery group) containing VDDUTMII, VDDANA, VDDOSC, VDDNF, VDDIOPx and VDDQSPI inputs
- VDDIOM (memory group)
- VDDCORE (core group)

The figure below shows the recommended power-up sequence. Note the following:

- VDDBU
 - When supplied from a precharged storage element (battery, supercapacitor or micro-battery), VDDBU is an always-on supply input and is therefore not part of the power supply sequencing.
 - When no storage element is used on VDDBU in the application, VDDBU must be tied to VDD_3V3.
 - When a supercapacitor or a micro-battery is used in the application to power VDDBU in Backup mode, this element must be isolated from VDDBU during its (slow) charge, so that VDDBU closely follows VDD_3V3. In table [Power-Up Timing Specification](#), the parameter t_1 limits the delay to establish VDDBU after VDD_3V3.
- VDDOUT25 is the output of the internal 2.5V regulator, and therefore there is no power supply requirement on this pin. VDDOUT25 is automatically started at VDD_3V3 rise when VDD_3V3 is above its Power-On-Reset threshold.

Figure 5-2. Recommended Power-Up Sequence

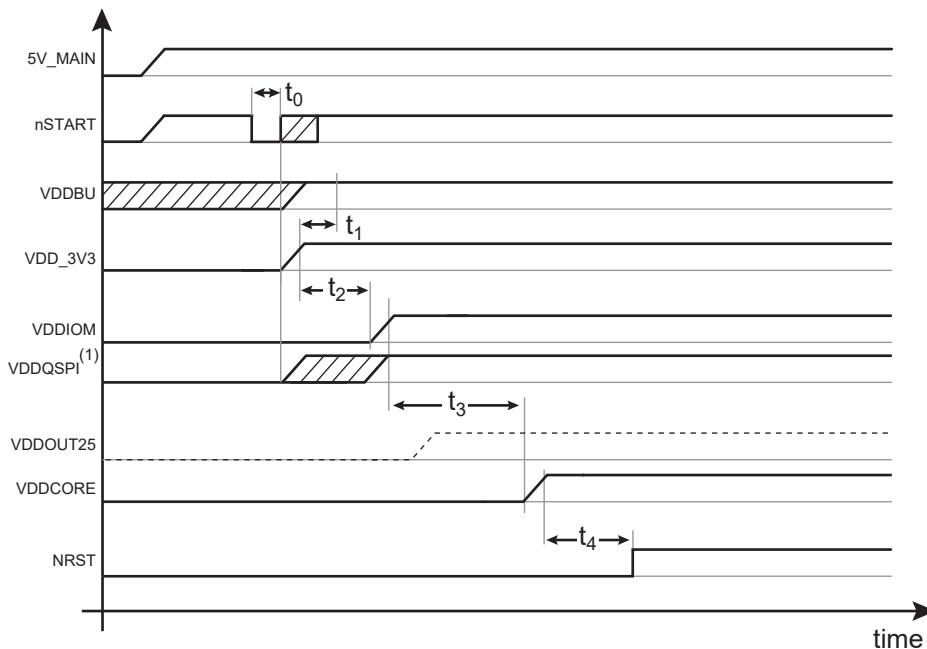


Table 5-2. Power-Up Timing Requirements

Symbol	Parameter	Conditions ²	Min	Typ	Max	Unit
t_0	nSTART deglitch time	nSTART pin falling edge	0.5	-	-	ms
t_1	VDDBU delay	Delay from established VDD_3V3 to established VDDBU	-	-	0.2	ms
t_2	VDD_3V3 to Periphery group delay	Delay from established VDD_3V3 to the periphery group established supply	-	8	-	ms

.....continued

Symbol	Parameter	Conditions ²	Min	Typ	Max	Unit
t_3	Periphery group to VDDCORE delay	Delay from the periphery group established supply to the VDDCORE supply turn-on	-	4	-	ms
t_4	Reset delay at power-up	From established VDDCORE to NRST high	-	16	-	ms

Notes:

1. If VDDQSPI is supplied externally, the power must be applied at the same time or after the presence of VDD_3V3 and before the presence of VDDIOM.
2. The term "established" refers to a power supply established to 90% of its final value.

The following figure shows the SAM9X60D1G-I/LZB power-down sequence that starts by asserting the NRST line to 0.

Once NRST is asserted, the supply inputs can be immediately shut down without any specific timing or order. VDDBU may not be shut down if the application uses a backup storage element on this supply input.

Figure 5-3. Recommended Power-Down Sequence

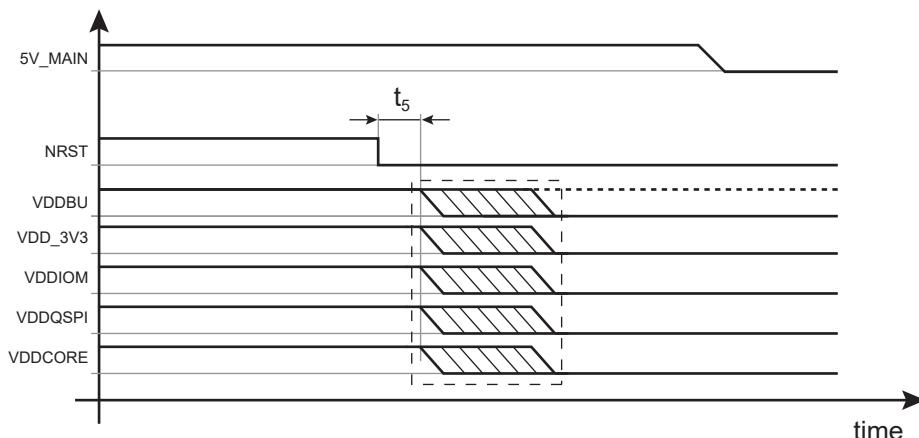


Table 5-3. Power-Down Timing Requirements

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
t_5	NRST delay at power-down	Delay from NRST asserted to first supply turn-off	0	-	10	μ s

5.3

Power Management Unit

The SAM9X60D1G-I/LZB System-On-Module is supplied by an external supply (5V_MAIN) and generates its own internal supplies via the Microchip MCP16501 power management unit.

The MCP16501 is a full-featured Power Management Integrated Circuit (PMIC), cost and size optimized for Microchip MPU devices such as the SAM9X60D1G.

The MCP16501 integrates three DC-DC buck regulators used for system supplying and one auxiliary LDO for customer purposes.

- All buck channels can support loads up to 1A. All bucks are 100% duty cycle capable.
 - DCDC1 set to 3.3 V supplies all pads of the embedded devices. This power rail offers a 600-mA load to customer application through pins 41 and 42 (VDD_3V3).
 - DCDC2 set to 1.8V supplies the DDR2 memory. This power rail offers a 600-mA load to customer application through pins 54 and 55 (VDDIOM).

- DCDC3 set to 1.15V supplies the microprocessor core.
- One 300-mA LDO is provided so that sensitive analog loads can be supported.

The default power channel sequencing is built-in, as required by the Microchip SAM9X60D1G MPU device.

Active discharge resistors are provided on each output. All buck channels support safe start-up into pre-biased outputs.

The MCP16501 is available in a 4x4 mm 24-pin VQFN package.

The LPM pin of the Microchip SAM9X60 SOM, combined with the PWRHLD (also named SHDN) status pin of the MCP16501 PMIC, define different power states, which are illustrated in the table below.

PWRHLD	LPM	Buck1	Buck2	Buck3	LDO1	nRST	Power State ⁽¹⁾
0	0	Off	Off	Off	LEN Controlled	Low	Off
0	1	Off	On ⁽²⁾	Off	LEN Controlled	Low	Hibernate mode
1	1	On ⁽²⁾	On ⁽²⁾	On ⁽²⁾	LEN Controlled	HiZ	Low-Power mode
1	0	On ⁽³⁾	On ⁽³⁾	On ⁽³⁾	LEN Controlled	HiZ	Active mode

For more information about the PMIC MCP16501, see [Reference Documents](#).


Notes:

1. Only allowed modes are listed. If the PWRHLD/LPM combination is not listed, the mode is not allowed.
2. In this mode, the DCDC is configured in Automatic Pulse-Frequency Modulation (Auto-PFM) mode.
3. In this mode, the DCDC is configured in Force Pulse-Width Modulation (FPWM) mode.

For more information about the use of the MCP16501 PMIC LPM feature, refer to the MCP16501 data sheet (see [Reference Documents](#)).

The LPM pin is controlled externally, as shown in the figure below.

Figure 5-4. LPM Schematic

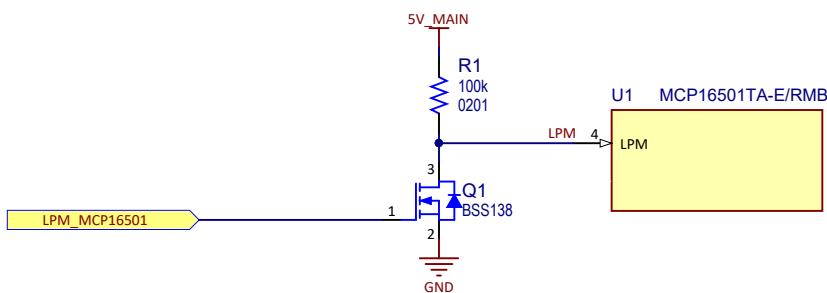

5.4 Power Configurations

Two different configurations are described below, depending on customer use.

- Single supply—SAM9X60D1G-I/LZB can be supplied by only one input supply (for example, a 5V AC/DC wall adapter) and other input supplies can be connected to the internal 3.3V regulator VDD_3V3. All the PIO lines are supplied at 3.3V.
- Multiple supplies—SAM9X60D1G-I/LZB can be supplied by a 5V supply and a backup battery. Some PIO lines are supplied by different LDOs for specific applications, such as VDDQSPI.

Figure 5-5. SAM9X60D1G-I/LZB Single Supply Connection Example


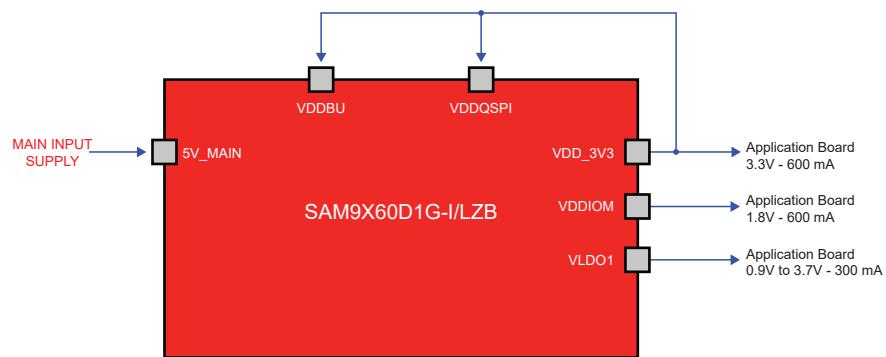


Figure 5-6. SAM9X60D1G-I/LZB Multiple Supplies Connection Example

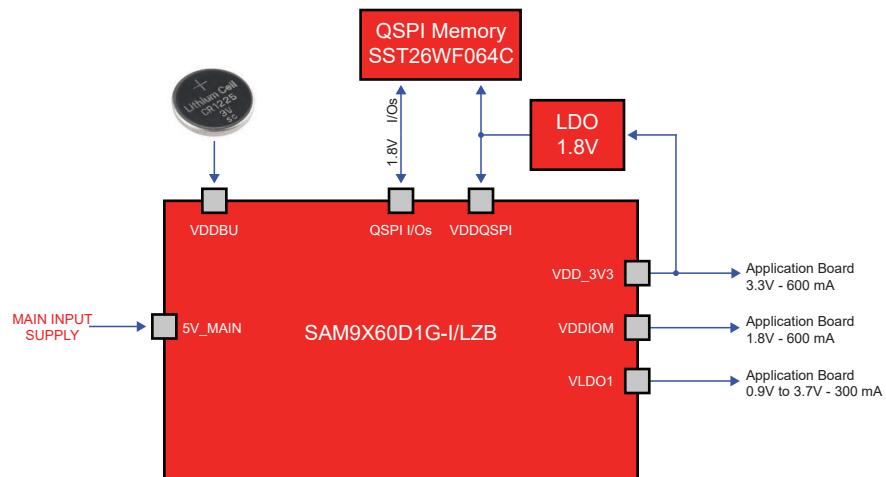

6. MPU and Memory Subsystem

6.1 SAM9X60 System-in-Package (SiP)

The SAM9X60D1G-I/LZB System-On-Module embeds the SAM9X60 SiP (SAM9X60D1G), which integrates the ARM926EJ-S Arm Thumb processor-based SAM9X60 MPU with a 1-Gbit DDR2-SDRAM in a single package.

By combining the SAM9X60 with DDR2 in a single package, PCB routing complexity, area and number of layers are reduced. This makes board design easier and more robust by facilitating design for EMI, ESD and signal integrity.

For more information about the SAM9X60 SiP, see [Reference Documents](#).

The SAM9X60 SiP is available in a 233-ball TFBGA package.

The SAM9X60D1G-I/LZB provides global system Reset (NRST) and Shutdown (SHDN) pins to the application board.

- The NRST pin is an input/output pin generated by the internal power management unit (MCP16501) in respect with power sequence timing. It is distributed internally to the microprocessor and to the Ethernet PHY and then it can be forced externally for system level control.
- The SHDN pin is an output pin and is managed by the software application. In an application case, the pin can switch on/off the 5V_MAIN external main supply.

6.2 MPU Clocks

Two clock sources are necessary for the SAM9X60D1G-I/LZB microprocessor:

- 32.768-kHz oscillator for slow clock oscillator input and embedded RTC of the SAM9X60
- 24-MHz main oscillator for the SAM9X60

Each clock is generated by a Microchip ultra-low power MEMS oscillator:

1. DSC6102HI2B-024.0000 device: delivers a 24-MHz clock to the SAM9X60D1G. Can be enabled externally via the 24M_EN pin to control power consumption during activity.

For more information about the MEMS DSC61xxB, see [Reference Documents](#).

The 24-MHz clock can be enabled/disabled as required by the application, through the 24M_EN signal available on pin 132. Three configurations are possible:

- 24M_EN pin connected to VDD (VDD_3V3). The clock is enabled.
- 24M_EN connected to GND. The clock is stopped.
- 24M_EN connected to a GPIO. The clock is dynamically controlled by software.

2. Crystal device: delivers a 32.768-kHz clock to the SAM9X60D1G.

6.3 NAND Flash Memory

The SAM9X60D1G-I/LZB System-On-Module embeds a 4-Gbit SLC NAND Flash memory supported through its External Bus Interface controller.


The System-On-Module implements one of the following references to provide a 4-Gbit memory space:

- MX30LF4G28AD-XKI in VFBGA-63 package
- MT29F4G08ABAFAH4-IT:F in VFBGA-63 package

The software must be adapted to recognize the relevant NAND Flash manufacturer. Linux supports all references. For details on how to build Linux software, refer to www.linux4microchip.com/.

The NAND_CS pin is accessible externally so that the boot can be unselected from the NAND Flash memory during debug phases.

Figure 6-1. NAND Flash Memory Block Diagram

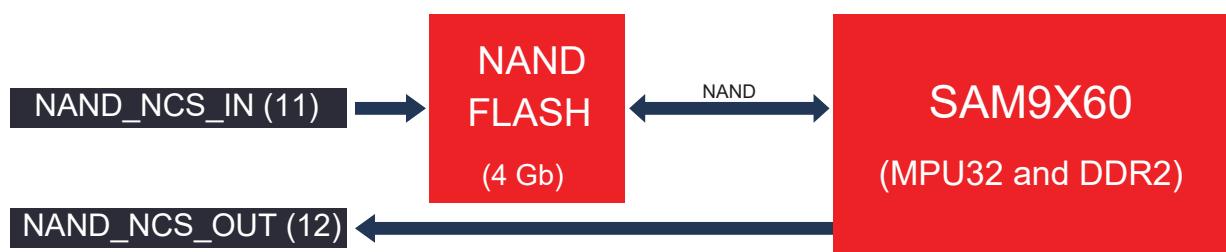

Power Rail	I/O Type	Primary		Alternate		PIO Peripheral				Reset State	Note
		Signal	Type	Signal	Dir	Func	Signal	Dir	IO Set		
VDD_3V3	GPIO	PD0	I/O	-	-	A	NANDOE	O	1	PIO, I, PU	Used for NAND Flash Control Interface
VDD_3V3	GPIO	PD1	I/O	-	-	A	NANDWE	O	1	PIO, I, PU	
VDD_3V3	GPIO	PD2	I/O	-	-	A	A21/NANDALE	O	1	A21,O, PD	
VDD_3V3	GPIO	PD3	I/O	-	-	A	A22/NANDCLE	O	1	A22,O, PD	
VDD_3V3	GPIO	PD4	I/O	-	-	A	NCS3	O	1	PIO, I, PU	
VDD_3V3	GPIO	PD5	I/O	-	-	A	NWAIT	O	1	PIO, I, PU	
VDD_3V3	GPIO	PD6	I/O	-	-	A	D16	I/O	1	PIO, I, PU	
VDD_3V3	GPIO	PD7	I/O	-	-	A	D17	I/O	1	PIO, I, PU	
VDD_3V3	GPIO	PD8	I/O	-	-	A	D18	I/O	1	PIO, I, PU	
VDD_3V3	GPIO	PD9	I/O	-	-	A	D19	I/O	1	PIO, I, PU	
VDD_3V3	GPIO	PD10	I/O	-	-	A	D20	I/O	1	PIO, I, PU	
VDD_3V3	GPIO	PD11	I/O	-	-	A	D21	I/O	1	PIO, I, PU	
VDD_3V3	GPIO	PD12	I/O	-	-	A	D22	I/O	1	PIO, I, PU	
VDD_3V3	GPIO	PD13	I/O	-	-	A	D23	I/O	1	PIO, I, PU	


7. LAN Subsystem

7.1 EEPROM

The SAM9X60D1G-I/LZB System-On-Module embeds the 24AA025E48T-I/OT, a 1-Kbit Serial EEPROM with a pre-programmed EUI-48 MAC address. The device is organized as one block of 128 x 8-bit memory with a 2-wire serial interface. The second block is reserved for MAC address storage. The 24AA025E48T-I/OT also has a page write capability for up to 16 bytes of data. The 24AA025E48T-I/OT is available in the standard 5-lead SOT-23 package.

For more information about the 24AA025E48 EEPROM, see [Reference Documents](#).

Figure 7-1. EEPROM Memory Block Diagram

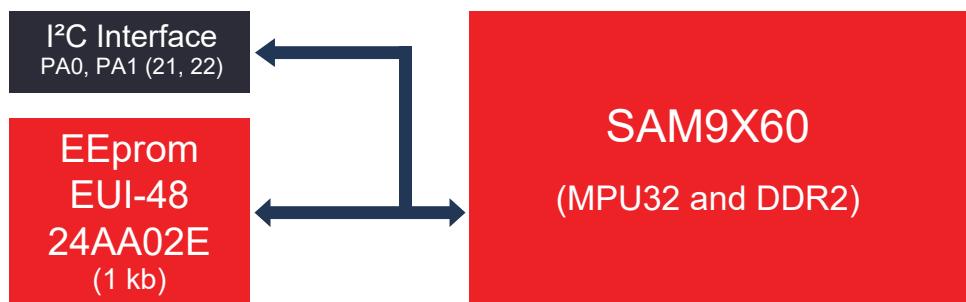

Tip: The 2-wire serial interface can be externally shared with another device. A 2-wire data signal (pad 21) and a 2-wire clock signal (pad 22) are used.



Important: If the 2-wire serial interface is used externally, the connected device must have an I²C address different from the embedded EEPROM address. For more details, refer to the device data sheet and to the System-On-Module schematic.


7.2 Ethernet Clock

One 25-MHz clock source is required by the SAM9X60D1G-I/LZB Ethernet port. The clock is generated by a Microchip ultra-low-power MEMS oscillator.

The DSC6102HI2B-025.0000 device delivers a controllable 25-MHz clock to the KSZ8081 Ethernet PHY with an ultra-low power consumption of about 3 mA in Active mode.

For more information about the MEMS DSC61xxB, see [Reference Documents](#).

Figure 7-2. 25-MHz MEMS Oscillator Schematic

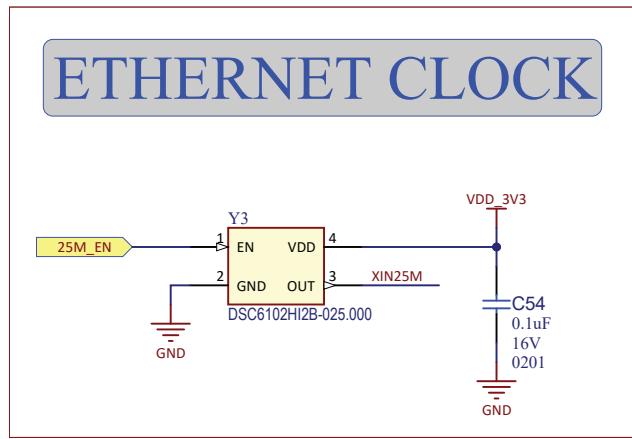

The 25-MHz clock can be enabled/disabled as required by the application through the 25M_EN signal available on pin 75. Three configurations are possible:


- 25M_EN pin connected to VDD (VDD_3V3). The clock is enabled.
- 25M_EN connected to GND. The clock is stopped.
- 25M_EN connected to a GPIO. The clock is controlled dynamically.

7.3 Ethernet PHY

The Microchip SAM9X60D1G-I/LZB embeds a single-supply 10BASE-T/100BASE-TX Ethernet physical-layer transceiver for transmission and reception of data over a standard CAT-5 Unshielded Twisted Pair (UTP) cable. The KSZ8081RNAIA is a highly-integrated PHY solution. The KSZ8081RNAIA offers the Reduced Media Independent Interface (RMII) for direct connection to RMII-compliant MACs in Ethernet processors. The KSZ8081RNAIA is available in 24-pin, lead-free QFN packages.

For more information about the Ethernet PHY KSZ8081, see [Reference Documents](#).

Figure 7-3. Ethernet PHY Block Diagram

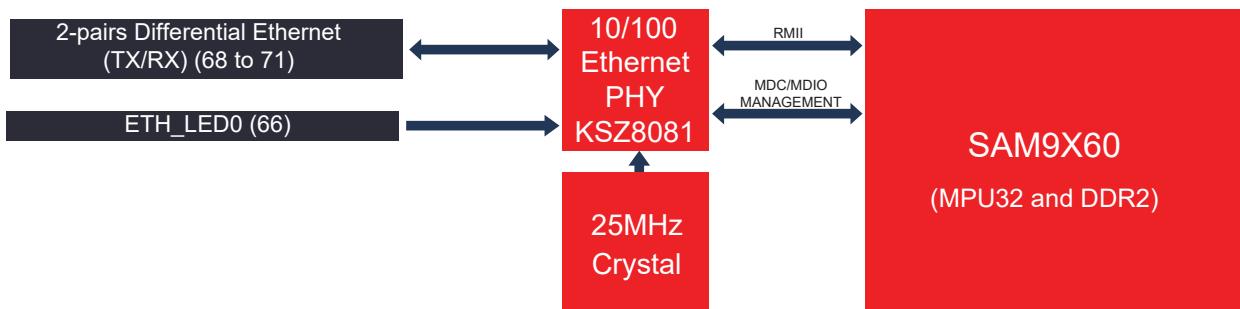


Power Rail	I/O Type	Primary		Alternate		PIO Peripheral			Reset State		Note
		Signal	Type	Signal	Dir	Func	Signal	Dir	IO Set	Signal, Dir, PU, PD, HiZ, ST, SEC, FILTER	
VDD_3V3	GPIO	PB0	I/O	WKUP5	I	A	E0_RX0	I	1	PIO, I, PU, ST	Used for RMII Interface
VDD_3V3	GPIO	PB1	I/O	-	-	A	E0_RX1	I	1	PIO, I, PU, ST	
VDD_3V3	GPIO	PB2	I/O	-	-	A	E0_RXER	I	1	PIO, I, PU, ST	
VDD_3V3	GPIO	PB3	I/O	WKUP6	I	A	E0_RXDV	I	1	PIO, I, PU, ST	
VDD_3V3	GPIO	PB4	I/O	-	-	A	E0_TXCK	O	1	PIO, I, PU, ST	
VDD_3V3	GPIO	PB7	I/O	AD8	I	A	E0_TXEN	O	1	PIO, I, PU, ST	
VDD_3V3	GPIO	PB9	I/O	AD10	I	A	E0_TX0	O	1	PIO, I, PU, ST	
VDD_3V3	GPIO	PB10	I/O	AD11	I	A	E0_TX1	O	1	PIO, I, PU, ST	
VDD_3V3	GPIO	PB5	I/O	-	-	A	E0_MDIO	I/O	1	PIO, I, PU, ST	
VDD_3V3	GPIO	PB6	I/O	AD7	I	A	E0_MDC	O	1	PIO, I, PU, ST	
VDD_3V3	GPIO	PB8	I/O	AD9	I	-	PB8	-	-	PIO, I, PU, ST	Interrupt Line

7.4 Interfacing with the Ethernet PHY

7.4.1 Ethernet Design Schematic Example

The figure below is a schematic example at main board level.

Figure 7-4. Ethernet PHY Schematic Example

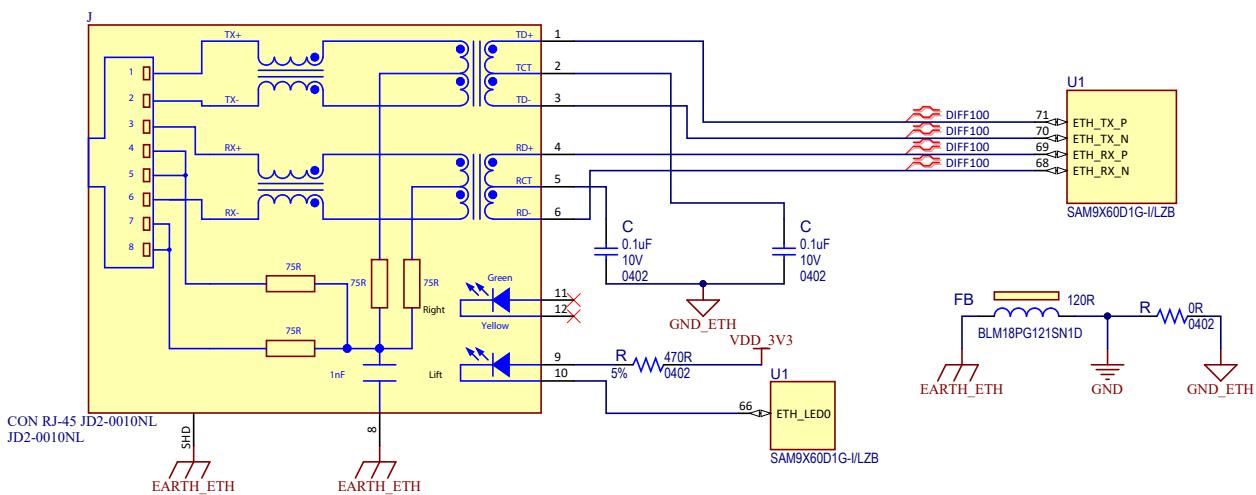

7.4.2 Ethernet Design Layout Recommendations


When designing the Ethernet interface, consider the following recommendations:

- ETH_TX_P, ETH_TX_N, ETH_RX_P and ETH_RX_N should be routed on the top layer without any vias.
- ETH_TX_P and ETH_TX_N should be matched in length to within 120 mils.
- ETH_RX_P and ETH_RX_N should be matched in length to within 120 mils.
- ETH_TX_x and ETH_RX_x must be symmetrical in shape and routing path.
- Place the TX_P and TX_N signals at least two times the trace width away from other signals for noise immunity.

- Place signals at least two times the trace width away from any copper plane.
- Place the TX and RX signals at least three times the trace width away from other signals for noise immunity.
- Check that the ETH_TX_x and ETH_RX_x line impedance is the same for all signal layers.
Recommended differential impedance for net: $100\Omega \pm 5\%$.

7.4.3 Ethernet Design Layout Example

Figure 7-5. Ethernet Layout Example

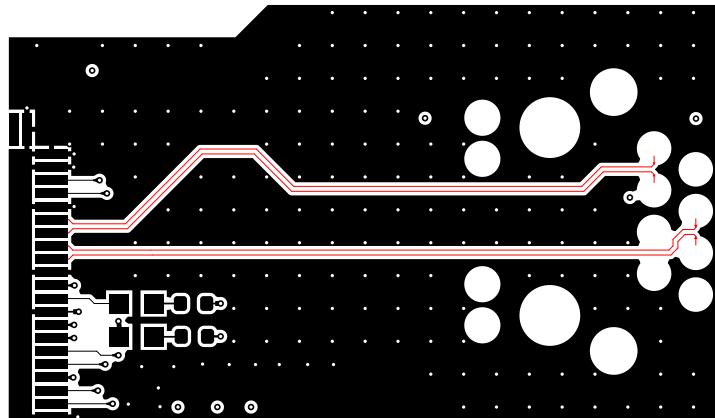

8. External Interfacing

8.1 Interfacing with FLEXCOM Interfaces

8.1.1 Interfacing in I²C Mode

Ten Flexible Serial Communication Controller (FLEXCOM) interfaces configurable in TWI mode, and one TWI interface, are available on the SAM9X60D1G-I/LZB.

FLEXCOM offers several serial communication protocols that are managed by the USART, SPI and TWI submodules.

The Two-Wire Interface (TWI) can interconnect with external components on a unique two-wire bus, made up of one clock line and one data line with speeds of up to 400 Kbits/s in Fast mode and up to 3.4 Mbits/s in High-Speed Client mode only, based on a byte-oriented transfer format.

It can be used with any Two-Wire Interface bus Serial EEPROM and I²C-compatible devices, such as a Real-Time Clock (RTC), a dot matrix/graphic LCD controller or a temperature sensor. The TWI is programmable as a host or a client with sequential or single-byte access. Multiple host capability is supported.

Table 8-1. I²C Interface Configurations

Interface Instance	IO Set	Pin No.	PIO	Pin Name	Comment
FLEXCOM0	1	21	PA0	FLEXCOM0_IO0_TWD_PA0	No external pull-up needed. Already integrated in the SAM9X60D1G-I/LZB.
		22	PA1	FLEXCOM0_IO1_TWCK_PA1	
FLEXCOM1	1	73	PA5	FLEXCOM1_IO0	
		74	PA6	FLEXCOM1_IO1	
FLEXCOM2	1	32	PA7	FLEXCOM2_IO0	
		33	PA8	FLEXCOM2_IO1	
FLEXCOM3	1	120	PC22	FLEXCOM3_IO0	
		121	PC23	FLEXCOM3_IO1	
FLEXCOM4	1	145	PA12	FLEXCOM4_IO0	External pull-up needed in case the FLEXCOM interface is used as an I ² C/TWI interface.
		144	PA11	FLEXCOM4_IO1	
FLEXCOM5	1, 2	35	PA22	FLEXCOM5_IO0	
		36	PA21	FLEXCOM5_IO1	
FLEXCOM6	1	80	PA30	FLEXCOM6_IO0	
		79	PA31	FLEXCOM6_IO1	
FLEXCOM7	1	92	PC0	FLEXCOM7_IO0	
		93	PC1	FLEXCOM7_IO1	
FLEXCOM9	1	102	PC8	FLEXCOM9_IO0	
		104	PC9	FLEXCOM9_IO1	
FLEXCOM10	1	111	PC16	FLEXCOM10_IO0	
		112	PC17	FLEXCOM10_IO1	
FLEXCOM11	1	64	PB19	FLEXCOM11_IO0	External pull-up needed in case the FLEXCOM interface is used as an I ² C/TWI interface.
		60	PB20	FLEXCOM11_IO1	
FLEXCOM12	1	61	PB21	FLEXCOM12_IO0	
		62	PB22	FLEXCOM12_IO1	

8.1.2 Interfacing in UART Mode

Ten FLEXCOM interfaces configurable in UART mode are available on the SAM9X60D1G-I/LZB.

FLEXCOM offers several serial communication protocols that are managed by the USART, SPI and TWI submodules.

Table 8-2. UART Interface Configurations

Interface Instance	IO Set	Pin No.	PIO	Pin Name
FLEXCOM1	1	73	PA5	FLEXCOM1_IO0
		74	PA6	FLEXCOM1_IO1
FLEXCOM2	1	32	PA7	FLEXCOM2_IO0
		33	PA8	FLEXCOM2_IO1
FLEXCOM3	1	120	PC22	FLEXCOM3_IO0
		121	PC23	FLEXCOM3_IO1
FLEXCOM4	1	145	PA12	FLEXCOM4_IO0
		144	PA11	FLEXCOM4_IO1
FLEXCOM5	1,2	35	PA22	FLEXCOM5_IO0
		36	PA21	FLEXCOM5_IO1
FLEXCOM6	1	80	PA30	FLEXCOM6_IO0
		79	PA31	FLEXCOM6_IO1
FLEXCOM7	1	92	PC0	FLEXCOM7_IO0
		93	PC1	FLEXCOM7_IO1
FLEXCOM9	1	102	PC8	FLEXCOM9_IO0
		104	PC9	FLEXCOM9_IO1
FLEXCOM10	1	111	PC16	FLEXCOM10_IO0
		112	PC17	FLEXCOM10_IO1
FLEXCOM11	1	64	PB19	FLEXCOM11_IO0
		60	PB20	FLEXCOM11_IO1
FLEXCOM12	1	61	PB21	FLEXCOM12_IO0
		62	PB22	FLEXCOM12_IO1

8.1.3 Interfacing in SPI Mode

Four FLEXCOM interfaces configured in SPI mode are available on the SAM9X60D1G-I/LZB.

FLEXCOM offers several serial communication protocols that are managed by the USART, SPI and TWI submodules.

The Serial Peripheral Interface (SPI) circuit is a synchronous serial data link that provides communication with external devices in Host or Client mode. It also enables communication between processors if an external processor is connected to the system.

The Serial Peripheral Interface is essentially a shift register that serially transmits data bits to other SPI devices. During a data transfer, one SPI system acts as the "host," which controls the data flow, while the other devices act as "clients," which have data shifted in and out by the host. Different CPUs can take turns being hosts (multiple host protocol, as opposed to single host protocol, where one CPU is always the host while all others are always clients). One host can simultaneously shift data into multiple clients. However, only one client can drive its output to write data back to the host at any given time.

A client device is selected when the host asserts its NSS signal. When multiple client devices are available, the host generates a separate client select signal (NPCS) for each.

The SPI system consists of two data lines and two control lines:

- Host Out Client In (MOSI)—This data line supplies the output data from the host shifted into the input(s) of the client(s).

- Host In Client Out (MISO)—This data line supplies the output data from a client to the input of the host. There may be no more than one client transmitting data during any particular transfer.
- Serial Clock (SPCK)—This control line is driven by the host and regulates the flow of the data bits. The host can transmit data at a variety of baud rates; there is one SPCK pulse for each bit transmitted.
- Client Select (NSS)—This control line allows clients to be turned on and off by hardware.

Table 8-3. FLEXCOM Interface Configurations in SPI Mode

Interface Instance	IO Set	Pin No.	PIO	Pin Name	Description
FLEXCOM1	1	73	PA5	FLEXCOM1_IO0	MOSI Signal
		74	PA6	FLEXCOM1_IO1	MISO Signal
		129	PC29	FLEXCOM1_IO2	SPCK Signal
		128	PC28	FLEXCOM1_IO3	NPCS0 Signal
FLEXCOM3	1	120	PC22	FLEXCOM3_IO0	MOSI Signal
		121	PC23	FLEXCOM3_IO1	MISO Signal
		126	PC26	FLEXCOM3_IO2	SPCK Signal
		125	PC25	FLEXCOM3_IO3	NPCS0 Signal
FLEXCOM4	1	145	PA12	FLEXCOM4_IO0	MOSI Signal
		144	PA11	FLEXCOM4_IO1	MISO Signal
		146	PA13	FLEXCOM4_IO2	SPCK Signal
		147	PA14	FLEXCOM4_IO3	NPCS0 Signal
FLEXCOM4	2	145	PA12	FLEXCOM4_IO0	MOSI Signal
		144	PA11	FLEXCOM4_IO1	MISO Signal
		146	PA13	FLEXCOM4_IO2	SPCK Signal
		147	PA14	FLEXCOM4_IO3	NPCS0 Signal
FLEXCOM5	1	35	PA22	FLEXCOM5_IO0	MOSI Signal
		36	PA21	FLEXCOM5_IO1	MISO Signal
		34	PA23	FLEXCOM5_IO2	SPCK Signal
		33	PA8	FLEXCOM5_IO3	NPCS0 Signal
		80	PA31	FLEXCOM5_IO5	NPCS2 Signal
		79	PA30	FLEXCOM5_IO6	NPCS3 Signal
FLEXCOM5	2	35	PA22	FLEXCOM5_IO0	MOSI Signal
		36	PA21	FLEXCOM5_IO1	MISO Signal
		34	PA23	FLEXCOM5_IO2	SPCK Signal
		33	PA8	FLEXCOM5_IO3	NPCS0 Signal
		32	PA7	FLEXCOM5_IO4	NPCS1 Signal
		80	PA31	FLEXCOM5_IO5	NPCS2 Signal
		79	PA30	FLEXCOM5_IO6	NPCS3 Signal

8.2 Interfacing with an SD Card

The SD (Secure Digital) Card is a nonvolatile memory card format used as mass storage memory in mobile devices.

Secure Digital Multimedia Card (SDMMC) Controller

The SAM9X60D1G-I/LZB includes two Secure Digital Multimedia Card (SDMMC) interfaces that support the MultiMedia Card (e.MMC) specification V4.51, the SD Memory Card specification V3.0, and the SDIO V3.0 specification. They are compliant with the SD Host Controller Standard V3.0 specification.

The two interfaces can be connected to a standard SD Card interface.

SDMMCx Card Connector

The board features two standard MMC/SD Card connectors, connected to SDMMC0 and SDMMC1. Both interface communications are based on a 4-pin interface (clock, command, four data and power lines).


Table 8-4. SDMMCx Interface Configurations

Interface Instance	IO Set	Pin No.	PIO	Pin Name	Description
SDMMC0	1	86	PA17	SDMMC0_CK	SD Card/e.MMC clock signal
		89	PA16	SDMMC0_CMD	SD Card/e.MMC command Line
		91	PA15	SDMMC0_DAT0	SD Card/e.MMC data lines
		88	PA18	SDMMC0_DAT1	
		90	PA19	SDMMC0_DAT2	
		87	PA20	SDMMC0_DAT3	
SDMMC1	1	146	PA13	SDMMC1_CK	SD Card/e.MMC clock signal
		145	PA12	SDMMC1_CMD	SD Card/e.MMC command line
		144	PA11	SDMMC1_DAT0	SD Card/e.MMC data lines
		81	PA2	SDMMC1_DAT1	
		82	PA3	SDMMC1_DAT2	
		83	PA4	SDMMC1_DAT3	

8.2.1 Design Schematic Example

The figure below illustrates the implementation for the SDMMC0 interface for a 4-bit interface.

Figure 8-1. 4-bit SD Card Interface Example Schematic

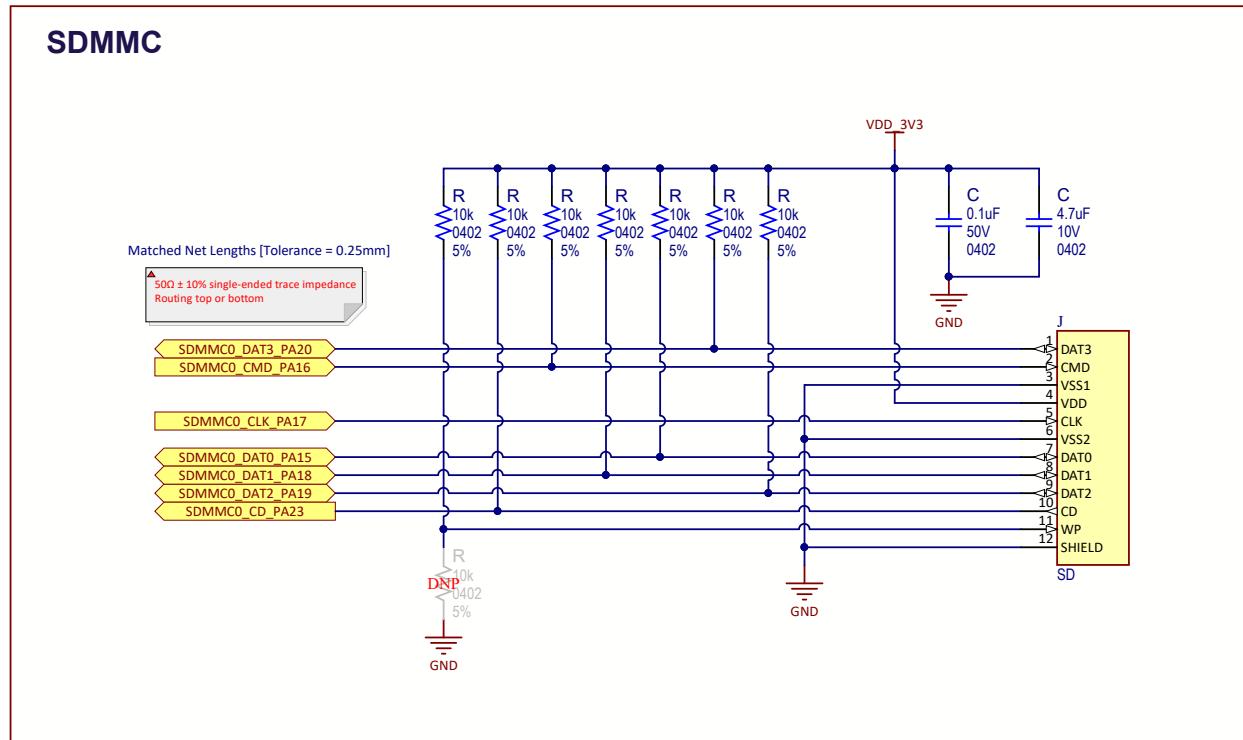


8.2.2 Design Layout Recommendations

When designing the SD Card interface, consider the following recommendations:

- Apply impedance control of 50 Ohms on the clock and data interfaces.
- Match signal lengths to within 20 mils. Affected PIOs in the example above are PA15 to PA20.
- Place the clock line (PA17) at least three times the trace width away from other signals for noise immunity.
- Place data signals at least two times the trace width away from any other data traces.
- Place data signals at least one trace width away from any copper plane.

Figure 8-2. SD Card Layout Example

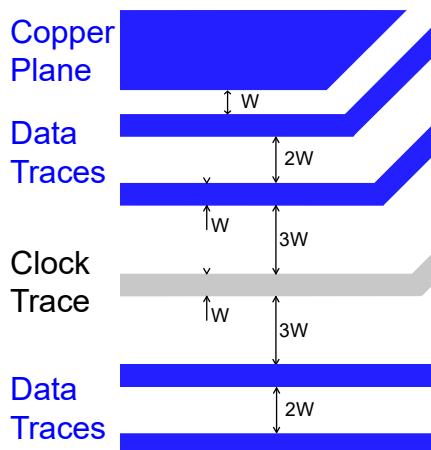

8.3 Interfacing with an LCD

8.3.1 Design Schematic Example


The SAM9X60D1G-I/LZB features a 24-bit RGB LCD interface.

The figure below is a schematic example at main board level illustrating the interface with the [AC32005](#) Microchip display module (WVGA LCD display module with maXTouch® technology).

In this example, several interfaces are used:

- LCD_xxx signals for display
- One SPI interface for display configuration
- One TWI interface for maXTouch and QTouch device control
- Two IRQ I/Os for capacitive touch and buttons interruption


Figure 8-3. LCD Schematic Example

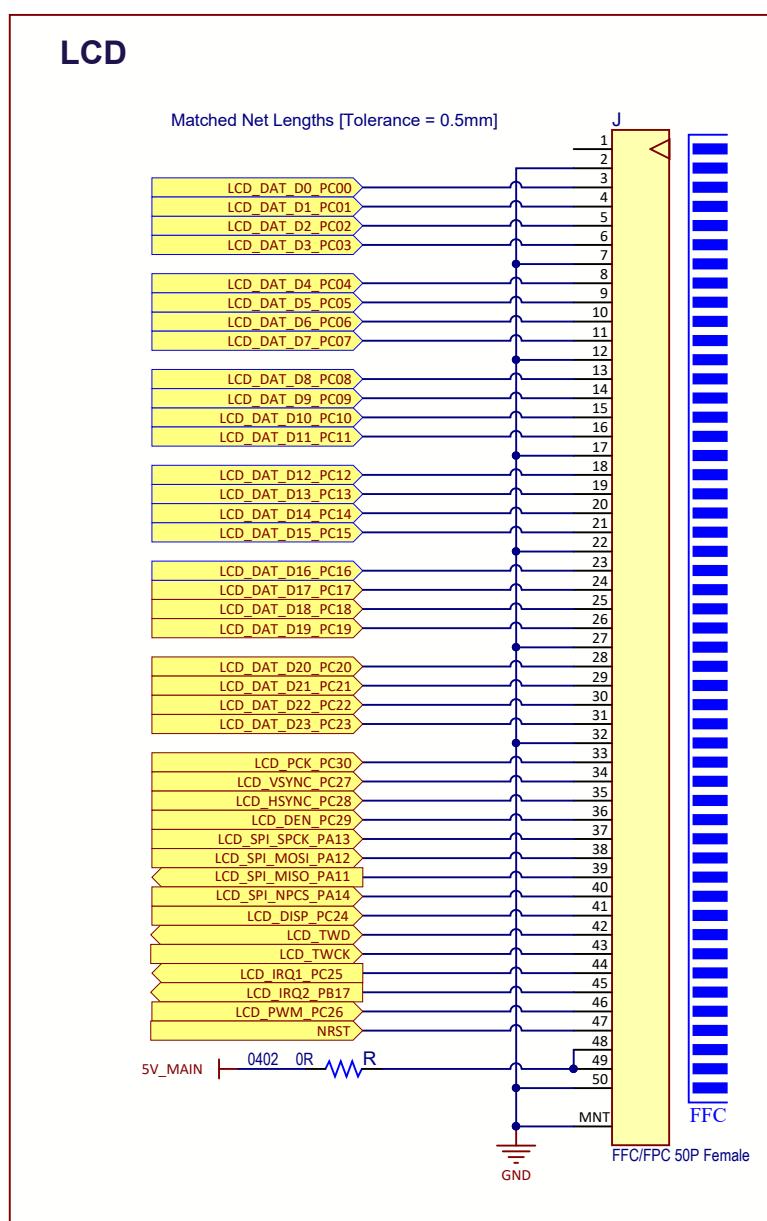

8.3.2 Design Layout Recommendations

When designing the LCD interface, consider the following recommendations:

- Match the LCD signals lengths to within 50 mils. Affected PIOs in the example above are PC0 to PC23, PC27 to PC30.
- Place the clock line (PC30) at least three times the trace width away from other signals for noise immunity.
- Place data signals at least two times the trace width away from any other data trace.
- Design data signals at least two times the trace width away from any copper plane.

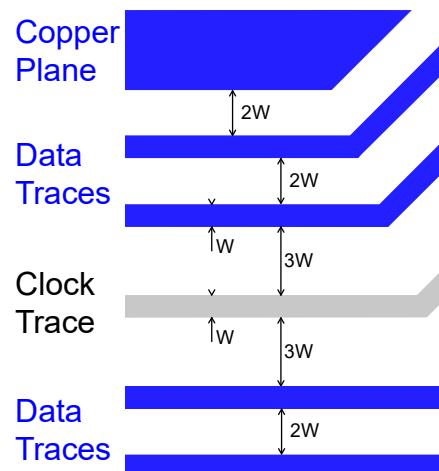Figure 8-4. LCD Layout Example


8.4 Interfacing with Class D Audio Output

The Audio Class D (CLASSD) amplifier is a digital input, Pulse Width Modulated (PWM) output mono Class D amplifier. It features a high-quality interpolation filter embedding a digitally-controlled gain, an equalizer and a de-emphasis filter.

On its input side, the CLASSD is compatible with most common audio data rates. On the output side, its PWM output can drive either:

- high-impedance single-ended or differential output loads (Audio DAC application), or
- external MOSFETs through an integrated non-overlapping circuit (Class D power amplifier application).

Figure 8-5. Class D Interface Example Schematic

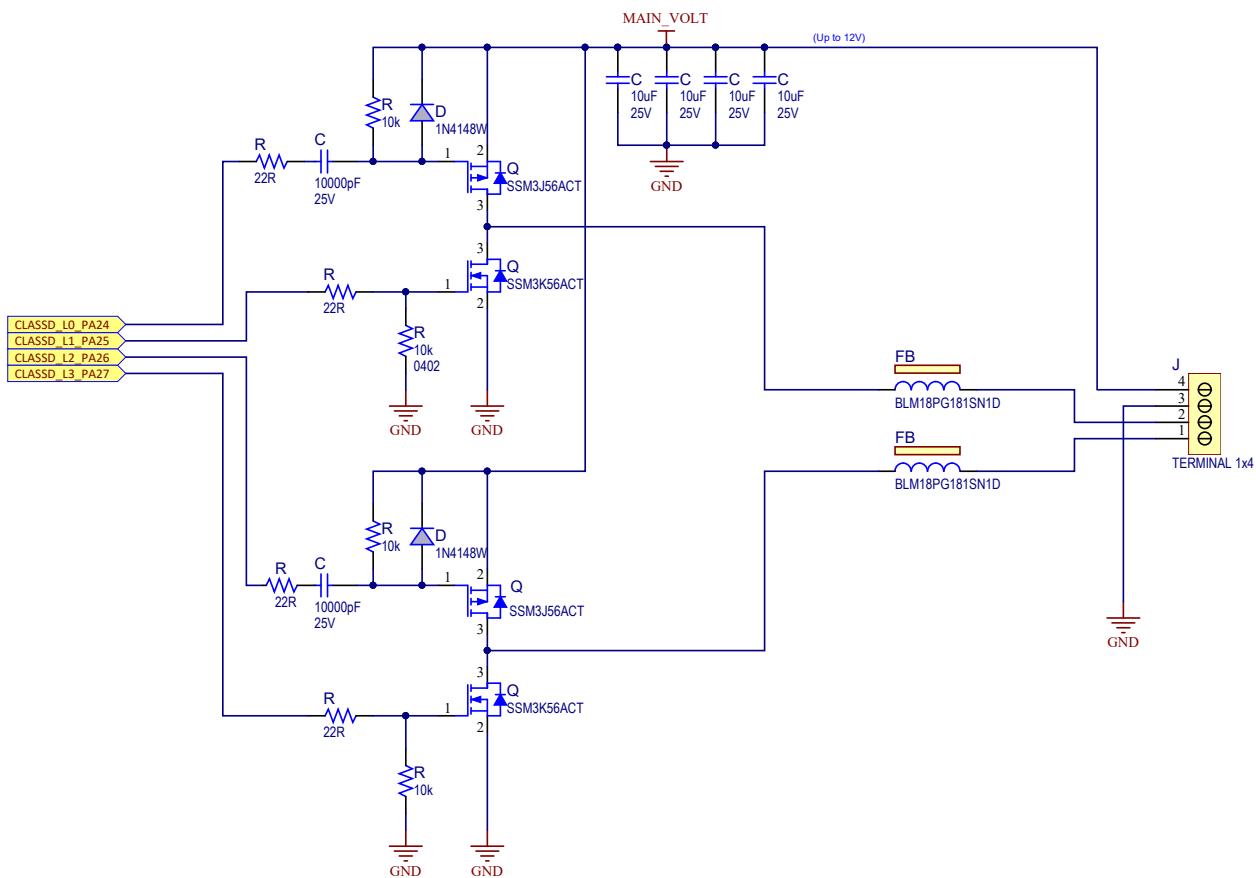


8.5 Interfacing with a Wireless Module

To interface the SAM9X60D1G-I/LZB System-On-Module with a wireless feature, several interfaces must be used, such as SDIO and USART interfaces. The example below is a Microchip ATWILC3000 wireless module.

ATWILC3000 is a single chip IEEE® 802.11 b/g/n RF/Baseband/MAC link controller with integrated Bluetooth® 5.0. The ATWILC3000 connects to Microchip AVR/SMART MCUs, SMART MPUs and other processors with minimal resource requirements using simple SPI/SDIO-to-Wi-Fi® and UART-to-Bluetooth interfaces. Any of the two ATWILC3000 variants, ATWILC3000-MR110UA (u.FL connector) and ATWILC3000-MR110CA (integrated antenna), can be used.

8.5.1 Design Schematic Example

Figure 8-6. Wireless Design Schematic Example

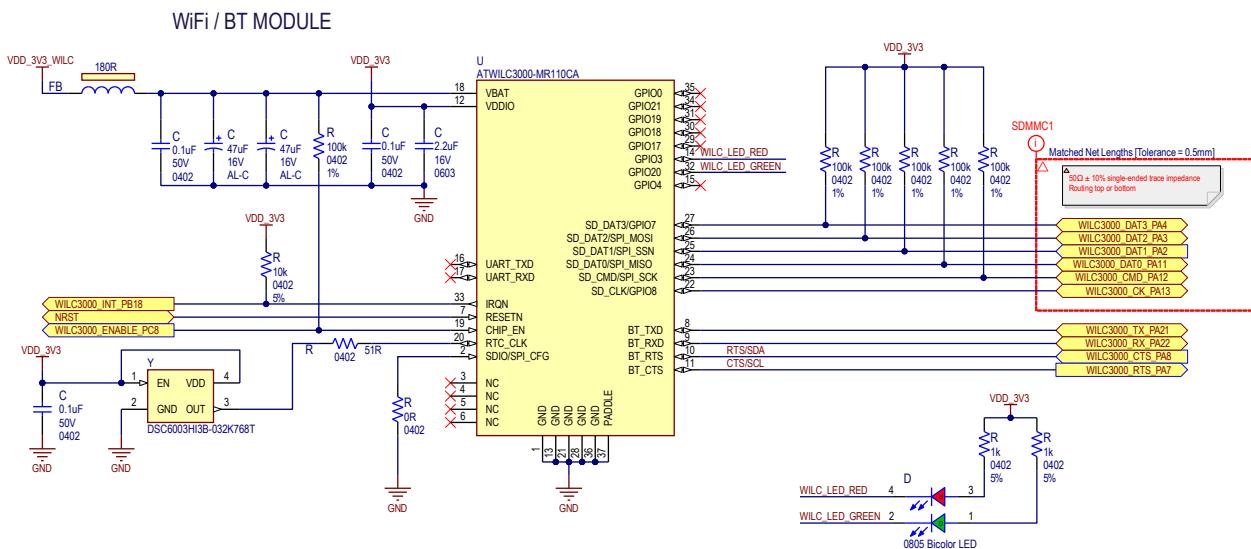


8.5.2 Design Layout Recommendations

No particular layout recommendation about the wireless module is provided in this chapter. All modules have their own recommendations described in their data sheet or application note. Refer to the appropriate document.

When designing the SDIO interface for the wireless solution, consider the following recommendations:

- Apply impedance control of 50 Ohms on the clock and data interfaces.
- Match the SDIO signal lengths to within 20 mils. Affected PIOs in the above example are PA2 to PA4, PA11 to PA13.
- Place the clock line (PA13) at least three times the trace width away from other signals for noise immunity.
- Place data signals at least two times the trace width away from any other data trace.
- Design data signals at least two times the trace width away from any copper plane.

Figure 8-7. SDIO Wireless Interface Layout Example

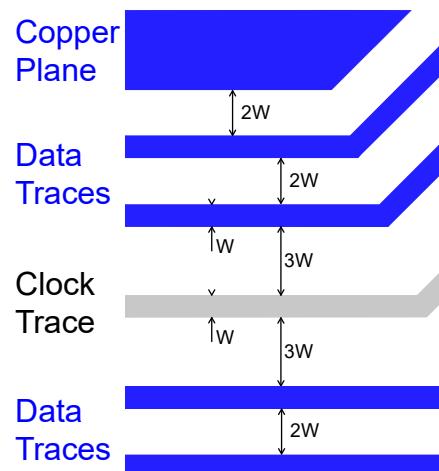


8.6 Interfacing with an Image Sensor

The Image Sensor Interface (ISI) system (or "camera interface") manages incoming data from a parallel sensor. It supports a single active interface. The parallel interface protocol can use a free-running clock or a gated clock strategy. It supports several protocols with an 8-bit or 10-bit data width, and raw Bayer format.

For more information about the ISI Interface, see [Reference Documents](#).

8.6.1 Design Schematic Example

Figure 8-8. Camera Interface Example Schematic

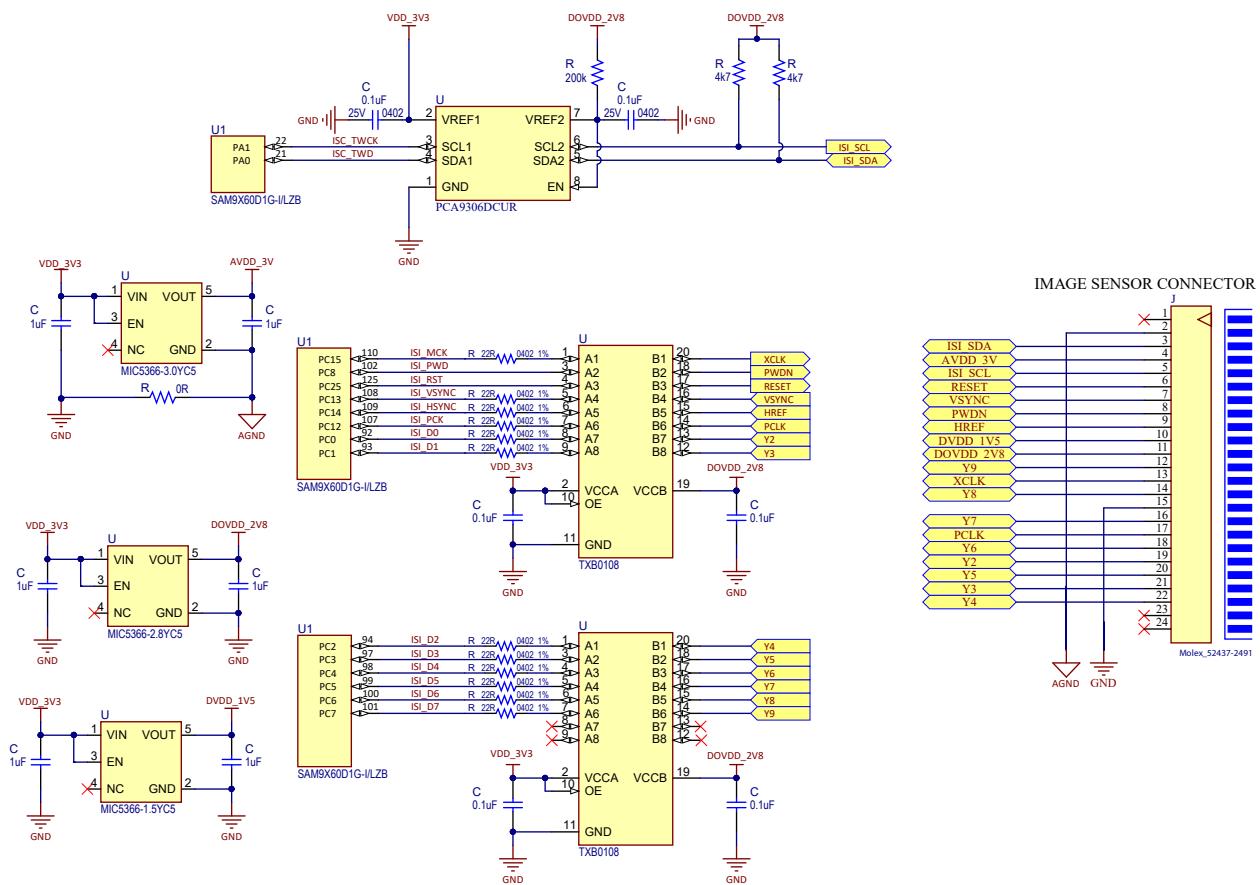


8.6.2 Design Layout Recommendations

When designing the ISI interface, consider the following recommendations:

- Match signal lengths to within 20 mils. Affected PIOs in the example above are PC0 to PC7 and PC12 to PC15.
- Place the clock lines (PC12 and PC15) at least three times the trace width away from other signals for noise immunity.
- Place data signals at least two times the trace width away from any other data traces.
- Place data signals at least two times the trace width away from any copper plane.

Figure 8-9. ISC Layout Example

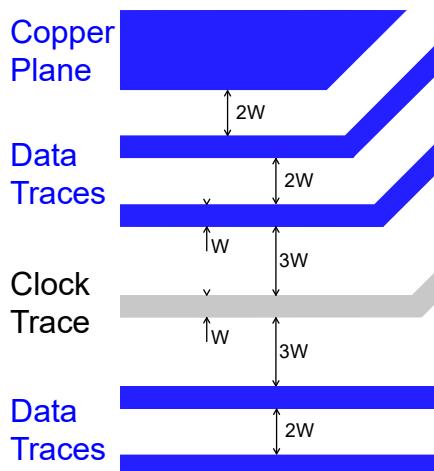

8.7 Interfacing with a QSPI Memory

The Quad Serial Peripheral Interface (QSPI) is a synchronous serial data link that provides communication with external devices in Host mode.

The QSPI can be used in SPI mode to interface to serial peripherals such as ADCs, DACs, LCD controllers, CAN controllers and sensors, or in Serial Memory mode to interface to serial Flash memories.

The QSPI enables the system to execute code directly from a serial Flash memory (eXecute In Place (XIP)) without code shadowing to RAM.

The serial Flash memory mapping is seen in the system as other memories such as ROM, SRAM, DRAM, embedded Flash memory, etc.


With the support of the Quad SPI protocol, the QSPI enables the system to use high-performance serial Flash memories which are small and inexpensive, instead of larger and more expensive parallel Flash memories.

For more information about the QSPI Interface, see [Reference Documents](#).

Note: Stacked devices with a rollover in the memory address space at each die boundary are not supported.

8.7.1 Design Schematic Example

Figure 8-10. QSPI Interface Example Schematic

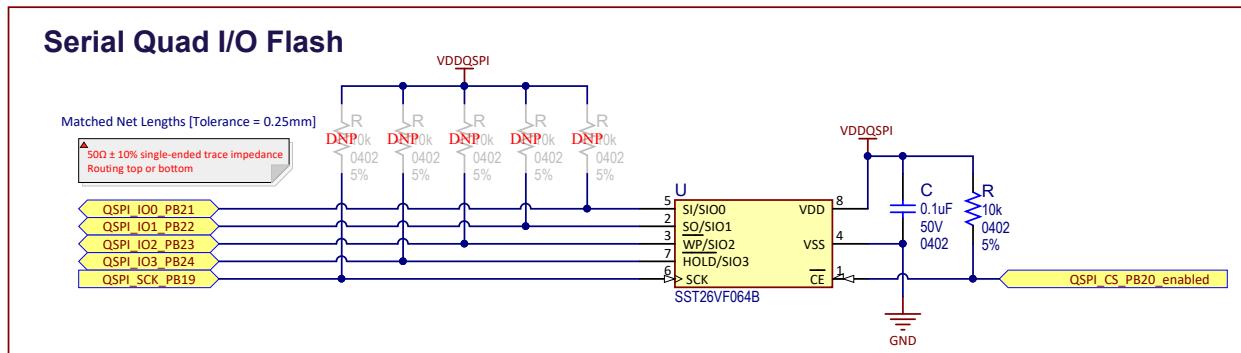


8.7.2 Design Layout Recommendations

When designing the QSPI interface, consider the following recommendations:

- Apply impedance control of 50 Ohms on the clock and data interfaces.
- Match signal lengths to within 10 mils. Affected PIOs in the example above are PB19 to PB24.
- Place the clock line (PB19) at least three times the trace width away from other signals for noise immunity.
- Place data signals at least two times the trace width away from any other data traces.
- Place data signals at least one trace width away from any copper plane.

Figure 8-11. QSPI Layout Example

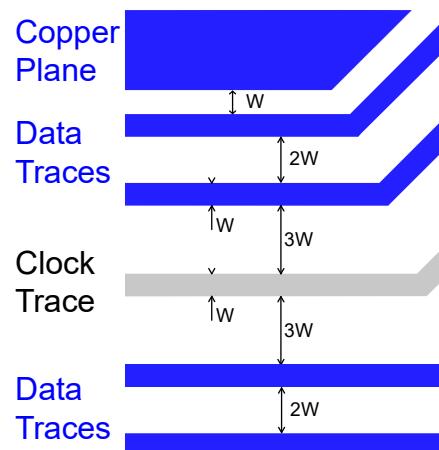

9. Electrical Characteristics

9.1 Absolute Maximum Ratings

Table 9-1. Absolute Maximum Ratings

I/O Supply Voltage	All GPIO	-0.3V to 4.0V	
QSPI Supply Voltage	VDDQSPI	-0.3V to 4.0V	
Main Supply Voltage	5V_MAIN	-0.3V to 6.0V	
Backup Supply Voltage	VDBBU	-0.3V to 4.0V	
Ambient Temperature	T_AMBIENT	-40 to +85°C	
Storage Temperature	T_STORAGE	-55 to +150°C	
Maximum Input Current	VDD_MAIN	2A max.	

Note: Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or other conditions beyond those indicated in the operational sections of this specification is not implied. **Exposure to absolute maximum rating conditions for extended periods may affect device reliability.**

9.2 Recommended Operating Conditions

The following table provides the operating conditions for the SAM9X60D1G-I/LZB.

Table 9-2. Recommended Operating Conditions

Symbol	Parameter	Min	Max	Unit
All GPIO	I/O supply voltage	3.23	3.36	V
VDDQSPI	QSPI supply voltage	1.6	3.6	V
5V_MAIN	Main supply voltage	3.0	5.5	V
VDBBU	Backup supply voltage	1.65	3.6	V
T _A	Operating temperature	-40	85	°C

9.3 DC Characteristics

The following characteristics are applicable to the T_A = -40°C to +85°C operating temperature range, unless otherwise specified.

Table 9-3. DC Electrical Characteristics for GPIO Inputs

Pad	Parameter	Conditions	Min	Typ	Max	Unit
V _{IL}	Low-level input voltage	All GPIO @ 3.3V	-0.3	-	0.4	V
V _{IH}	High-level input voltage	All GPIO @ 3.3V	2.3	-	3.6	V
V _{OL}	Low-level output voltage	IO max.	-	-	0.41	V
V _{OH}	High-level output voltage	IO max.	2.9	-	-	V
I _{IL}	Low-level input current	All GPIO @ 3.3V	-1	-	1	µA
I _{IH}	High-level input current	All GPIO @ 3.3V	-1	-	1	µA
I _{OL}	Low-level output current	All GPIO @ 3.3V / Low	-2	-	-	mA
		All GPIO @ 3.3V / High	-32	-	-	mA
I _{OH}	High-level output current	All GPIO @ 3.3V / Low	-	-	2	mA
		All GPIO @ 3.3V / High	-	-	32	mA

9.4 Power Consumption

The following current consumption values are provided for information only.

Current consumption can vary according to temperature, MPU load, GPU load and customer application (hardware connections, software application not listed).

Table 9-4. Power Consumption

Node	Measurement	Conditions	Min	Typ	Max	Unit
5V_MAIN	Current consumption	Linux and Ethernet transfer. 5V_MAIN = 5.00V	-	115	130	mA
5V_MAIN	Current consumption	Linux in Idle ¹ 5V_MAIN = 5.00V	-	90	105	mA
5V_MAIN	Current consumption	System off, all supplies off. 5V_MAIN = 5.00V	-	10	25	µA
VDDBU	Current consumption	VDDBU = 3.3V, @ 25°C	-	2.43	-	µA
VDDBU	Current consumption	1.6V < VDDBU < 3.6V. All temperature ranges, all modes	1.4	-	5	µA

Note:

1. "Linux in Idle" means that Linux is loaded and that the prompt is shown on the console, waiting for instructions.

10. Mechanical Characteristics

10.1 SAM9X60D1G-I/LZB Dimensions

Figure 10-1. SAM9X60D1G-I/LZB Dimensions

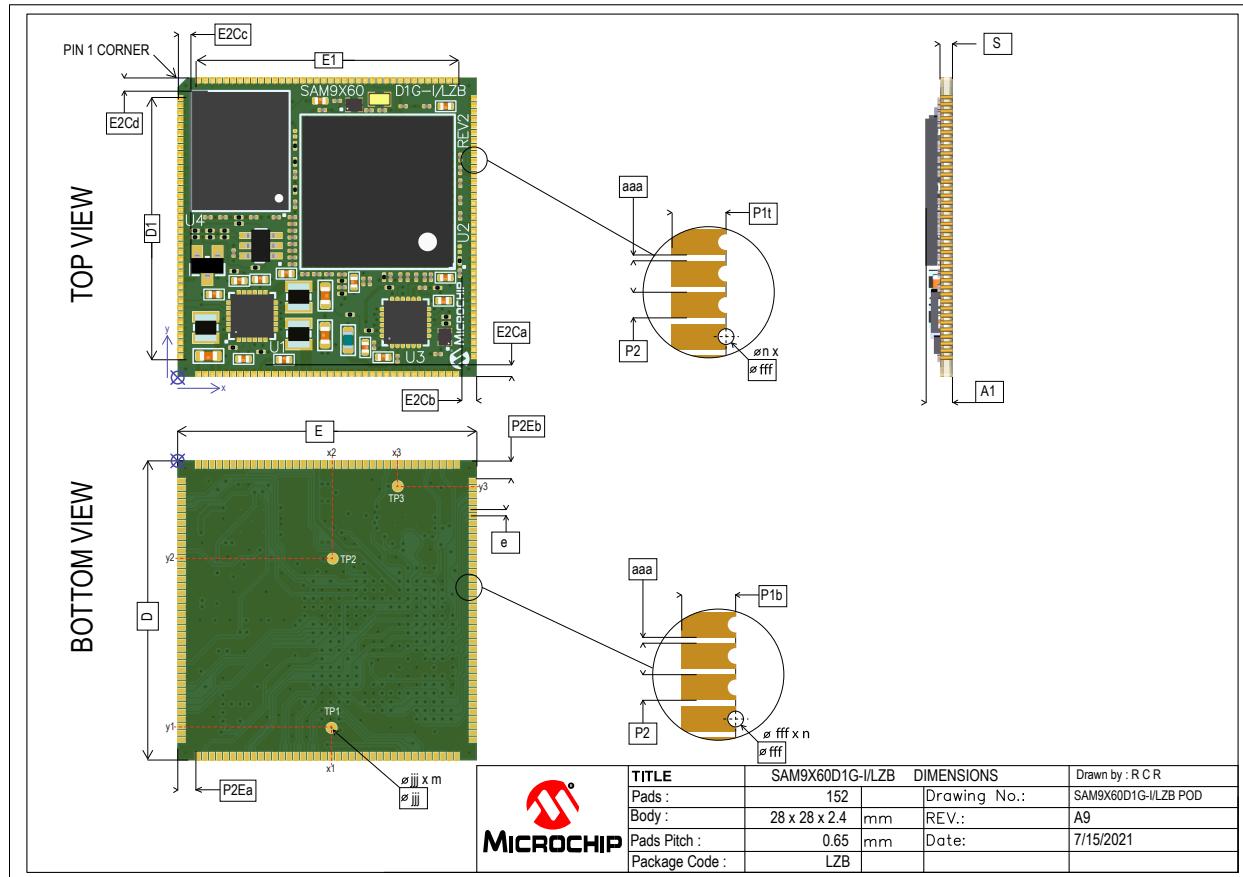


Table 10-1. SAM9X60D1G-I/LZB Dimensions (in mm)

Parameter	Symbol	Common Dimensions			Comments
		Min	Typ	Max	
Body overall dimensions	X	E	27.900	28.000	28.100
	Y	D	27.900	28.000	28.100
Pad pitch	e	-	0.650	-	
PCB thickness	S	1.150	1.200	1.250	
SOM total thickness	A1	-	2.400	2.450	
Pad length ¹	Top side	P1t	-	0.550	-
	Bottom side	P1b	-	0.800	-
Pad width ¹	P2	-	0.450	-	
Pad gap ¹	aaa	-	0.200	-	
Opening drill diameter	fff	-	0.300	-	0.300 typical minus metallization
Pad count	n	-	152	-	
Test point diameter	jjj	-	1.000	-	
Test point count	m	-	3	-	

.....continued

Parameter	Symbol	Common Dimensions			Comments
		Min	Typ	Max	
Pad edge to SOM edge ¹	X	P2Ea	-	1.750	-
	Y	P2Eb	-	1.750	-
		E2Ca	-	1.150	-
		E2Cb	-	1.425	-
		E2Cc	-	1.225	-
		E2Cd	-	1.225	-

Notes:

1. Tolerances are defined as per standards:
 - IPC A600 – Class2
 - IPC 2615
2. Test points placed under the SAM9X60D1G-I/LZB are for production purposes only. No connection to these points is allowed. To avoid any contact with the main board vias or copper areas, see the following table.

Table 10-2. Test Point Position Compared to Origin

Test Point Number	X (in mm)	Y (in mm)
TP1	14.400	24.925
TP2	14.500	9.200
TP3	20.550	2.475

10.2 Other Characteristics

Table 10-3. SAM9X60D1G-I/LZB Weight

Parameter	Measurement	
	Value	Unit
Weight	3.6	g

11. Ordering Information

Ordering Code	Version	Package	Carrier Type	Operating Temperature Range
SAM9X60D1G-I/LZB	1	152-pin 28x28 mm	Tray	-40°C to +85°C

12. Revision History

12.1 DS60001747B - 02/2024

Changes

[Introduction](#): updated picture.
[Features](#): updated. Added information on package.
[Reference Documents](#): updated.
[Pinout Overview](#): updated pin assignment image.
[Pin List](#): updated.
[PIOA Pin List](#): added Note 3.
[System Pin List](#): added notes.
[SAM9X60D1G-I/LZB Power Supplies](#): updated table. Added note.
[Power Management Unit](#): updated.
[SAM9X60 System-in-Package \(SiP\)](#): removed schematics.
[MPU Clocks](#): removed schematics.
[NAND Flash Memory](#): updated.
[EEPROM](#): updated.
[Ethernet PHY](#): updated.
SAM9X60D1G-I/LZB Land Pattern (Host Board PCB Footprint): deleted.
Assembly and Storage Information: deleted.

12.2 DS60001747A - 01/2022

Changes

First issue.

Microchip Information

The Microchip Website

Microchip provides online support via our website at www.microchip.com/. This website is used to make files and information easily available to customers. Some of the content available includes:

- **Product Support** – Data sheets and errata, application notes and sample programs, design resources, user's guides and hardware support documents, latest software releases and archived software
- **General Technical Support** – Frequently Asked Questions (FAQs), technical support requests, online discussion groups, Microchip design partner program member listing
- **Business of Microchip** – Product selector and ordering guides, latest Microchip press releases, listing of seminars and events, listings of Microchip sales offices, distributors and factory representatives

Product Change Notification Service

Microchip's product change notification service helps keep customers current on Microchip products. Subscribers will receive email notification whenever there are changes, updates, revisions or errata related to a specified product family or development tool of interest.

To register, go to www.microchip.com/pcn and follow the registration instructions.

Customer Support

Users of Microchip products can receive assistance through several channels:


- Distributor or Representative
- Local Sales Office
- Embedded Solutions Engineer (ESE)
- Technical Support

Customers should contact their distributor, representative or ESE for support. Local sales offices are also available to help customers. A listing of sales offices and locations is included in this document.

Technical support is available through the website at: www.microchip.com/support

Product Identification System

To order or obtain information, e.g., on pricing or delivery, refer to the factory or the listed sales office.

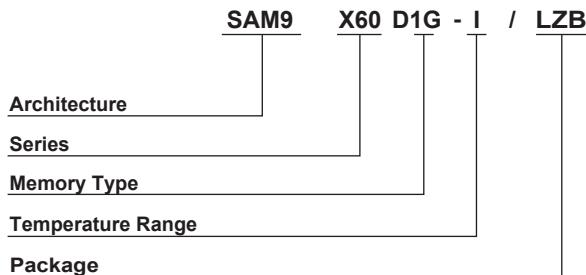

Architecture:	SAM9	= ARM926EJ-S Arm Thumb microprocessor
Series:	X60	
Memory Type and Size	D1G	= 1-Gbit DDR2-SDRAM
Temperature Range:	I	= -40°C to +85°C (industrial)
Package:	LZB	= Package Code

Example:

- SAM9X60D1G-I/LZB = System-On-Module (SOM) based on the SAM9X60 1-Gbit SiP device

Microchip Devices Code Protection Feature

Note the following details of the code protection feature on Microchip products:

- Microchip products meet the specifications contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is secure when used in the intended manner, within operating specifications, and under normal conditions.
- Microchip values and aggressively protects its intellectual property rights. Attempts to breach the code protection features of Microchip product is strictly prohibited and may violate the Digital Millennium Copyright Act.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of its code. Code protection does not mean that we are guaranteeing the product is "unbreakable". Code protection is constantly evolving. Microchip is committed to continuously improving the code protection features of our products.

Legal Notice

This publication and the information herein may be used only with Microchip products, including to design, test, and integrate Microchip products with your application. Use of this information in any other manner violates these terms. Information regarding device applications is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. Contact your local Microchip sales office for additional support or, obtain additional support at www.microchip.com/en-us/support/design-help/client-support-services.

THIS INFORMATION IS PROVIDED BY MICROCHIP "AS IS". MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE, OR WARRANTIES RELATED TO ITS CONDITION, QUALITY, OR PERFORMANCE.

IN NO EVENT WILL MICROCHIP BE LIABLE FOR ANY INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL, OR CONSEQUENTIAL LOSS, DAMAGE, COST, OR EXPENSE OF ANY KIND WHATSOEVER RELATED TO THE INFORMATION OR ITS USE, HOWEVER CAUSED, EVEN IF MICROCHIP HAS BEEN ADVISED OF THE POSSIBILITY OR THE DAMAGES ARE FORESEEABLE. TO THE FULLEST EXTENT ALLOWED BY LAW, MICROCHIP'S TOTAL LIABILITY ON ALL CLAIMS IN ANY WAY RELATED TO THE INFORMATION OR ITS USE WILL NOT EXCEED THE AMOUNT OF FEES, IF ANY, THAT YOU HAVE PAID DIRECTLY TO MICROCHIP FOR THE INFORMATION.

Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

Trademarks

The Microchip name and logo, the Microchip logo, Adaptec, AVR, AVR logo, AVR Freaks, BesTime, BitCloud, CryptoMemory, CryptoRF, dsPIC, flexPWR, HELDO, IGLOO, JukeBlox, KeeLoq, Kleer, LANCheck, LinkMD, maXStylus, maXTouch, MediaLB, megaAVR, Microsemi, Microsemi logo, MOST, MOST logo, MPLAB, OptoLyzer, PIC, picoPower, PICSTART, PIC32 logo, PolarFire, Prochip Designer, QTouch, SAM-BA, SenGenuity, SpyNIC, SST, SST Logo, SuperFlash, Symmetricom, SyncServer, Tachyon, TimeSource, tinyAVR, UNI/O, Vectron, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

AgileSwitch, ClockWorks, The Embedded Control Solutions Company, EtherSynch, Flashtec, Hyper Speed Control, HyperLight Load, Libero, motorBench, mTouch, Powermite 3, Precision Edge, ProASIC, ProASIC Plus, ProASIC Plus logo, Quiet-Wire, SmartFusion, SyncWorld, TimeCesium, TimeHub, TimePictra, TimeProvider, and ZL are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, Augmented Switching, BlueSky, BodyCom, Clockstudio, CodeGuard, CryptoAuthentication, CryptoAutomotive, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, Espresso T1S, EtherGREEN, EyeOpen, GridTime, IdealBridge, IGaT, In-Circuit Serial Programming, ICSP, INICnet, Intelligent Paralleling, IntelliMOS, Inter-Chip Connectivity, JitterBlocker, Knob-on-Display, MarginLink, maxCrypto, maxView, memBrain, Mindi, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, mSiC, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICkit, PICtail, Power MOS IV, Power MOS 7, PowerSmart, PureSilicon, QMatrix, REAL ICE, Ripple Blocker, RTAX, RTG4, SAM-ICE, Serial Quad I/O, simpleMAP, SimpliPHY, SmartBuffer, SmartHLS, SMART-I.S., storClad, SQI, SuperSwitcher, SuperSwitcher II, Switchtec, SynchroPHY, Total Endurance, Trusted Time, TSHARC, Turing, USBCheck, VariSense, VectorBlox, VeriPHY, ViewSpan, WiperLock, XpressConnect, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

The Adaptec logo, Frequency on Demand, Silicon Storage Technology, and Symmcom are registered trademarks of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2024, Microchip Technology Incorporated and its subsidiaries. All Rights Reserved.

ISBN: 978-1-6683-3965-7

AMBA, Arm, Arm7, Arm7TDMI, Arm9, Arm11, Artisan, big.LITTLE, Cordio, CoreLink, CoreSight, Cortex, DesignStart, DynamIQ, Jazelle, Keil, Mali, Mbed, Mbed Enabled, NEON, POP, RealView, SecurCore, Socrates, Thumb, TrustZone, ULINK, ULINK2, ULINK-ME, ULINK-PLUS, ULINKpro, µVision, Versatile

are trademarks or registered trademarks of Arm Limited (or its subsidiaries) in the US and/or elsewhere.

Quality Management System

For information regarding Microchip's Quality Management Systems, please visit www.microchip.com/quality.

Worldwide Sales and Service

AMERICAS	ASIA/PACIFIC	ASIA/PACIFIC	EUROPE
Corporate Office 2355 West Chandler Blvd. Chandler, AZ 85224-6199 Tel: 480-792-7200 Fax: 480-792-7277 Technical Support: www.microchip.com/support Web Address: www.microchip.com	Australia - Sydney Tel: 61-2-9868-6733 China - Beijing Tel: 86-10-8569-7000 China - Chengdu Tel: 86-28-8665-5511 China - Chongqing Tel: 86-23-8980-9588 China - Dongguan Tel: 86-769-8702-9880 China - Guangzhou Tel: 86-20-8755-8029 China - Hangzhou Tel: 86-571-8792-8115 China - Hong Kong SAR Tel: 852-2943-5100 China - Nanjing Tel: 86-25-8473-2460 China - Qingdao Tel: 86-532-8502-7355 China - Shanghai Tel: 86-21-3326-8000 China - Shenyang Tel: 86-24-2334-2829 China - Shenzhen Tel: 86-755-8864-2200 China - Suzhou Tel: 86-186-6233-1526 China - Wuhan Tel: 86-27-5980-5300 China - Xian Tel: 86-29-8833-7252 China - Xiamen Tel: 86-592-2388138 China - Zhuhai Tel: 86-756-3210040	India - Bangalore Tel: 91-80-3090-4444 India - New Delhi Tel: 91-11-4160-8631 India - Pune Tel: 91-20-4121-0141 Japan - Osaka Tel: 81-6-6152-7160 Japan - Tokyo Tel: 81-3-6880-3770 Korea - Daegu Tel: 82-53-744-4301 Korea - Seoul Tel: 82-2-554-7200 Malaysia - Kuala Lumpur Tel: 60-3-7651-7906 Malaysia - Penang Tel: 60-4-227-8870 Philippines - Manila Tel: 63-2-634-9065 Singapore Tel: 65-6334-8870 Taiwan - Hsin Chu Tel: 886-3-577-8366 Taiwan - Kaohsiung Tel: 886-7-213-7830 Taiwan - Taipei Tel: 886-2-2508-8600 Thailand - Bangkok Tel: 66-2-694-1351 Vietnam - Ho Chi Minh Tel: 84-28-5448-2100	Austria - Wels Tel: 43-7242-2244-39 Fax: 43-7242-2244-393 Denmark - Copenhagen Tel: 45-4485-5910 Fax: 45-4485-2829 Finland - Espoo Tel: 358-9-4520-820 France - Paris Tel: 33-1-69-53-63-20 Fax: 33-1-69-30-90-79 Germany - Garching Tel: 49-8931-9700 Germany - Haan Tel: 49-2129-3766400 Germany - Heilbronn Tel: 49-7131-72400 Germany - Karlsruhe Tel: 49-721-625370 Germany - Munich Tel: 49-89-627-144-0 Fax: 49-89-627-144-44 Germany - Rosenheim Tel: 49-8031-354-560 Israel - Ra'anana Tel: 972-9-744-7705 Italy - Milan Tel: 39-0331-742611 Fax: 39-0331-466781 Italy - Padova Tel: 39-049-7625286 Netherlands - Drunen Tel: 31-416-690399 Fax: 31-416-690340 Norway - Trondheim Tel: 47-72884388 Poland - Warsaw Tel: 48-22-3325737 Romania - Bucharest Tel: 40-21-407-87-50 Spain - Madrid Tel: 34-91-708-08-90 Fax: 34-91-708-08-91 Sweden - Gothenberg Tel: 46-31-704-60-40 Sweden - Stockholm Tel: 46-8-5090-4654 UK - Wokingham Tel: 44-118-921-5800 Fax: 44-118-921-5820
Atlanta Duluth, GA Tel: 678-957-9614 Fax: 678-957-1455 Austin, TX Tel: 512-257-3370 Boston Westborough, MA Tel: 774-760-0087 Fax: 774-760-0088 Chicago Itasca, IL Tel: 630-285-0071 Fax: 630-285-0075 Dallas Addison, TX Tel: 972-818-7423 Fax: 972-818-2924 Detroit Novi, MI Tel: 248-848-4000 Houston, TX Tel: 281-894-5983 Indianapolis Noblesville, IN Tel: 317-773-8323 Fax: 317-773-5453 Tel: 317-536-2380 Los Angeles Mission Viejo, CA Tel: 949-462-9523 Fax: 949-462-9608 Tel: 951-273-7800 Raleigh, NC Tel: 919-844-7510 New York, NY Tel: 631-435-6000 San Jose, CA Tel: 408-735-9110 Tel: 408-436-4270 Canada - Toronto Tel: 905-695-1980 Fax: 905-695-2078			