


Low-powered, coated transformers for PCB mount 18VA and 24VA

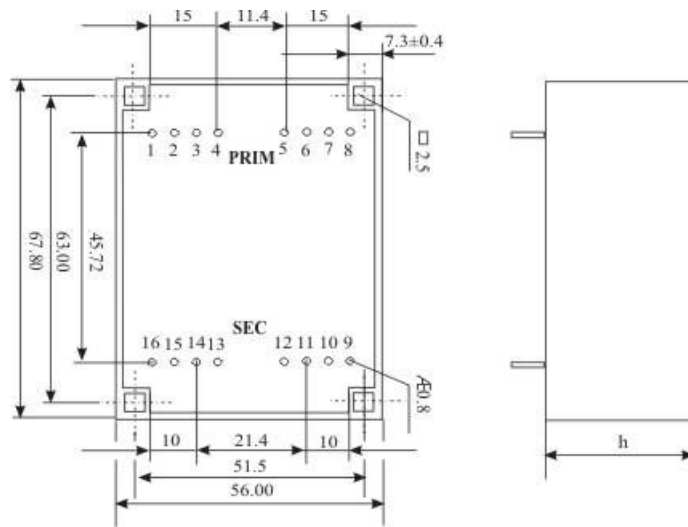

- Isolated primary and secondary windings
- Conditional short-circuit proof
- Coated in plastic box
- Other primary and secondary voltages on request

Part. №	Primary	Pins	Secondary	Pins	No load voltage $\pm 5\%$	h mm
ANG18VA/7.5V+7.5V	110V+110V	1-4, 5-8	7.5V + 7.5V / 1.2A	9-11, 14-16	9.4V	30.5
ANG18VA/9V+9V	110V+110V	1-4, 5-8	9V + 9V / 1A	9-11, 14-16	11.2V	30.5
ANG18VA/10.5V+10.5V	110V+110V	1-4, 5-8	10.5V + 10.5V / 0.85A	9-11, 14-16	13V	30.5
ANG18VA/12V+12V	110V+110V	1-4, 5-8	12V + 12V / 0.75A	9-11, 14-16	15V	30.5
ANG18VA/15V+15V	110V+110V	1-4, 5-8	15V + 15V / 0.6A	9-11, 14-16	18.6V	30.5
ANG18VA/18V+18V	110V+110V	1-4, 5-8	18V + 18V / 0.5A	9-11, 14-16	22.6V	30.5
ANG18VA/21V+21V	110V+110V	1-4, 5-8	21V + 21V / 0.41A	9-11, 14-16	26.2V	30.5
ANG18VA/24V+24V	110V+110V	1-4, 5-8	24V + 24V / 0.38A	9-11, 14-16	30V	30.5
ANG18VA/30V+30V	110V+110V	1-4, 5-8	30V + 30V / 0.3A	9-11, 14-16	37.2V	30.5
ANG24VA/7.5V+7.5V	110V+110V	1-4, 5-8	7.5V + 7.5V / 1.6A	9-11, 14-16	9V	34.5
ANG24VA/9V+9V	110V+110V	1-4, 5-8	9V + 9V / 1.33A	9-11, 14-16	11V	34.5
ANG24VA/10.5V+10.5V	110V+110V	1-4, 5-8	10.5V + 10.5V / 1.14A	9-11, 14-16	12.5V	34.5
ANG24VA/12V+12V	110V+110V	1-4, 5-8	12V + 12V / 1A	9-11, 14-16	14.4V	34.5
ANG24VA/15V+15V	110V+110V	1-4, 5-8	15V + 15V / 0.8A	9-11, 14-16	18V	34.5
ANG24VA/18V+18V	110V+110V	1-4, 5-8	18V + 18V / 0.66A	9-11, 14-16	21.6V	34.5
ANG24VA/24V+24V	110V+110V	1-4, 5-8	24V + 24V / 0.5A	9-11, 14-16	28.8V	34.5
ANG24VA/30V+30V	110V+110V	1-4, 5-8	30V + 30V / 0.4A	9-11, 14-16	36V	34.5