




Model: JLI-05700P

INPUT: 100~250V OUTPUT: 0.5~4V 700mA 3W

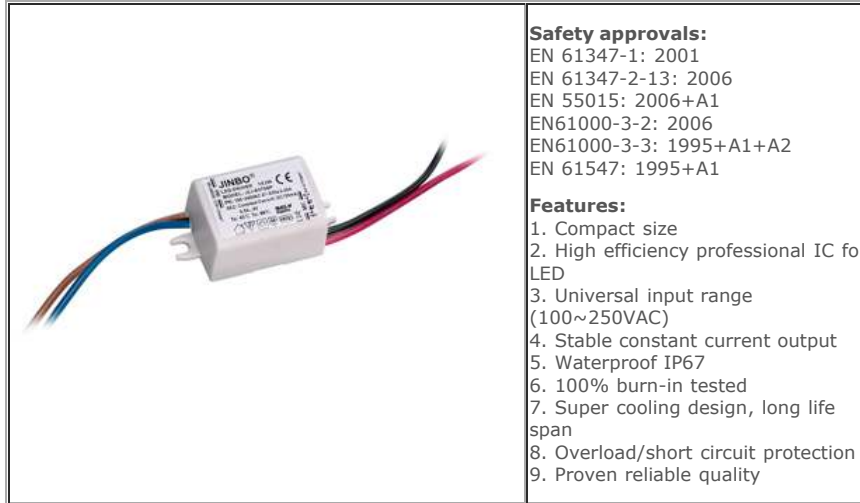


Safety approvals:

- EN 61347-1: 2001
- EN 61347-2-13: 2006
- EN 55015: 2006+A1
- EN61000-3-2: 2006
- EN61000-3-3: 1995+A1+A2
- EN 61547: 1995+A1

Features:

1. Compact size
2. High efficiency professional IC for LED
3. Universal input range (100~250VAC)
4. Stable constant current output
5. Waterproof IP67
6. 100% burn-in tested
7. Super cooling design, long life span
8. Overload/short circuit protection
9. Proven reliable quality

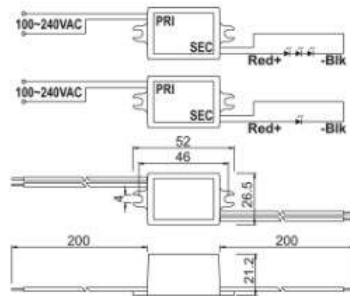

Model	JLI-05700P
Input Voltage	100~250V 47~63Hz
Output	Constant Current
Output Voltage	0.5~4V
Output Current	700mA
Output Power	3W
Working Temperature	-20~45 °C
Storage Temperature	-35~80 °C
Net Weight	40g
Dimension(mm)	54*27*21
Short circuit protection / Overload protection	

Packing Details

Package: 200 pcs/carton
Carton size: 54*27*21cm
G. Carton Weight: 9KG

