


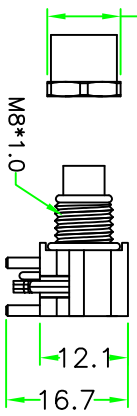
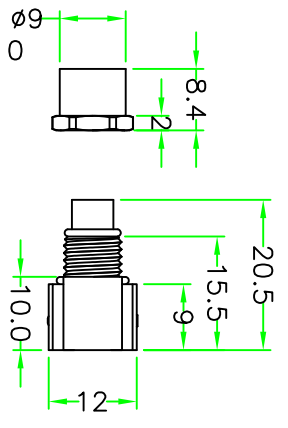


RECOMMENDED
PANEL CUT-OFF

RoHS
IP67




REV.	DESCRIPTION	DATE
A	ISSUE	Nov/09/2012


NOTES:
1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: < 4A
TEMPERATURE RANGE: -25°C TO +90°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
2. HOW TO ORDER: A08X-M2XXHPPRR

03 - 3 PINS
04 - 4 PINS


D - CURRENT RATING 4A

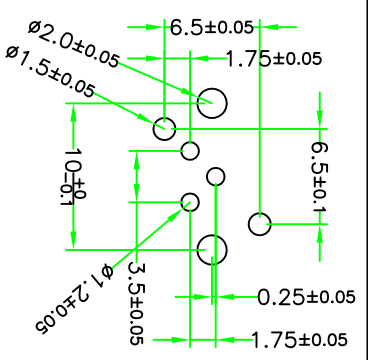


A08D-M203HPPRR

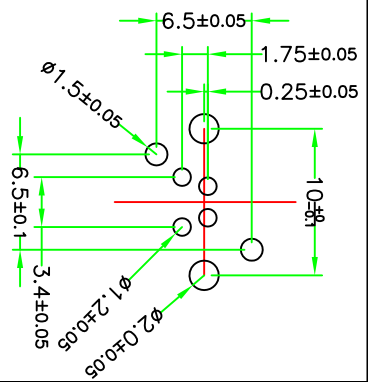

A08D-M204HPPRR



A08D-M203HPPRR A08D-M204HPPRR



PIN PCB LAYOUT

PIN ASSIGNMENT FRONT VIEW

No.	PART NAME	DESCRIPTION	COLOR	QTY	REMARKS
5	RING NUT	BRASS, Nickel Plated.	BLACK	1	08D-HSHELL
4	O-RING	NBR.	BLACK	1	0-7010-NK
3	O-RING	NBR.	BLACK	1	0-4010-NK
2	CONTACT	BRASS, Female Pin. 6u" Gold Plated.	BLACK	n	M8F-1.0PPR13 M8F-1.0PPR4
1	CONNECTOR	M8 A-Coding Female Connector Insert. Nylon+GF.	BLACK	1	A8D-XFRG (131-135)

SCALE: 1:1 UNIT: mm TITLE: M8 A-Coding Female R/A PCB Mount Connector P/N: A08X-M2XXHPPRR DR: Stanley CH: Mgeaace AP:	UNLESS OTHERWISE SPECIFIED TOLERANCES: X ±0.25 XX ±0.1 XXX ±0.05 ANGLE ±1°X REV. SHEET 1/1 DWG.NO: A08X-M2XXHPPRR
---	---

HOLIN HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司