


## Low-powered, encapsulated transformers for PCB mount 1.3VA, 1.5VA and 2VA

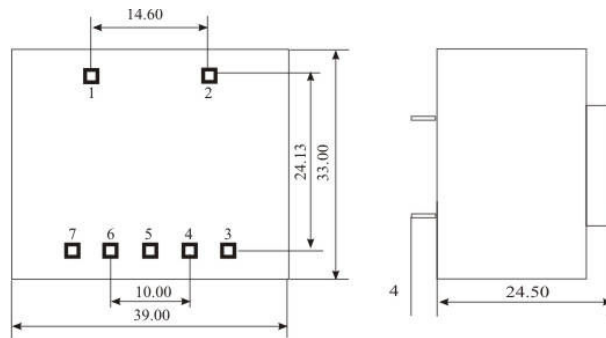

- Isolated primary and secondary windings
- Conditional short-circuit proof
- Coated in plastic box
- Other primary and secondary voltages on request

Part. №	Primary	Pins	Secondary	Pins	No load voltage ±5%
ANG1.3VA/6V	220V	1-2	6V / 220mA	4-6	7.5V
ANG1.3VA/7.5V	220V	1-2	7.5V / 150mA	4-6	10V
ANG1.3VA/9V	220V	1-2	9V / 150mA	4-6	11.6V
ANG1.3VA/12V	220V	1-2	12V / 100mA	4-6	15.4V
ANG1.3VA/16V	220V	1-2	16V / 40mA	4-6	18.2V
ANG1.3VA/18V	220V	1-2	18V / 40mA	4-6	20V
ANG1.3VA/2x12V	220V	1-2	2x12V / $U_0$	4-5-6	25.6V
ANG1.3VA/8.5V+8.5V	220V	1-2	8.5V + 8.5V / 50mA	3-7, 4-6	10.5V + 10.5V
ANG1.3VA/13V	220V	1-2	13V / 110mA	4-6	18V
ANG1.5VA/15V	220V	1-2	15V / 100mA	4-6	21.5V
ANG2VA/9V	220V	1-2	9V / 220mA	4-6	12.9V
ANG2VA/18V	220V	1-2	18V / 110mA	4-5-6	23.6V
ANG2VA/18V+18V	220V	1-2	18V + 18V / 50mA	3-4, 6-7	23.6V + 23.6V