


## RegloCard-Plus / Combifront

Enclosure with Pg pre-punchings in the terminal compartment

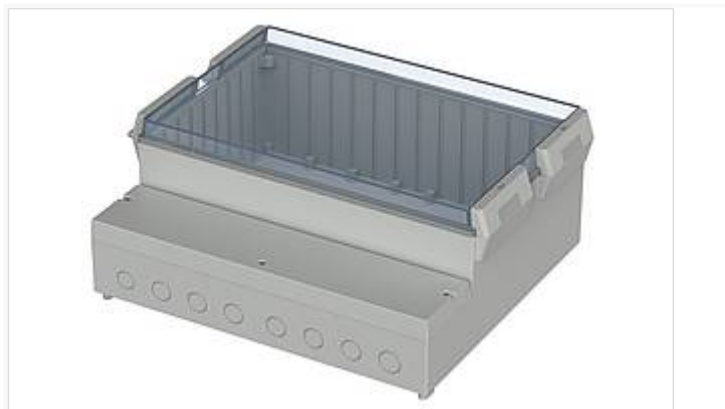

RCP 4000

Order no.: 41400109

Pre-punchings: 1 x Pg 11, 6 x Pg 13,5, 1 x Pg 16

\* = Available on request.

### Characteristics

Colour of enclosure group

Light grey

Protection class

IP 65

Enclosure Material

ABS, PC; seal made of EPDM; UL 94 V0 types on request; for details see Technical Information

Scope of delivery

Base, crystal-clear lid, hinged, mounted with snap lock, terminal compartment lid, catch, blind plug, screws

Note

CSA certificate for all V0 versions on request.


Enclosures without pre-punchings on request.

### Dimensions

Dimensions

363.4 x 318.6 x 150 mm

Product drawing

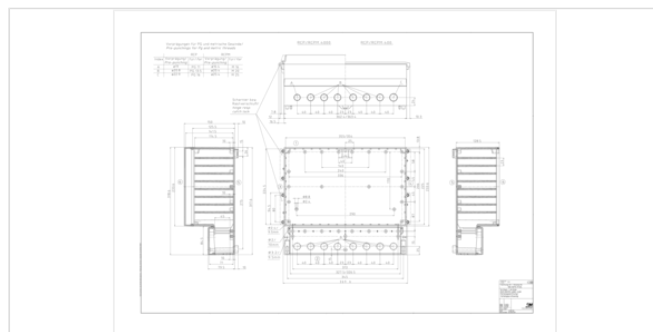

### Technical documentation / Downloads

Technical drawings

3D product data in STEP format: 41400109 RCP-4000.stp (3.8 MB)

Drawing for mechanical processing: 41400109 RCP-4000-G.dxf (1.1 MB)

19.10.2022

Milling contours are shown here as a DXF file. (Sub D, USB, HDMI, cable glands, ...)

Product drawing in PDF format: 41400109 RCP-4000.pdf (133.7 KB)

Product drawing in DXF format: 41400109 RCP-4000.dxf (1.1 MB)

## Product information

reglocard-plus-combifront en.pdf (1.0 MB)

## Important!

---

To compensate for pressure when temperatures change and cause moisture in the enclosure, we recommend that you use a pressure compensation element.

» Additional information

## Matching accessories

---



### Mounting panels, laminated paper

41000800 RCP/RCPM 400 M For RCP(M) 400(0) Brown



### Front panels, natural-coloured anodised aluminium

27120000 FAE 400 For RCP(M) 400(0), 1,5 mm



### Cylinder lock / hand knob for retro-fitting in the snap-lock mechanism

21008310 SHLO-302 Cylinder lock  
41002501 RCP/RCPM - HK Hand knob



### Wall brackets, screw-on at rear

41000309 RCP/RCPM - WL



### Screws (SHR) and distance bolts (DIBLZ) for mounting bosses in plastic enclosures

59006190 SHR Z KA25x6 SD = 2,5 / ND = 2,0 / KD = 4,4  
59006217 SHR Z KA30x8 SD = 3,0 / ND = 2,4-2,6 / KD = 6,0