


Voltage comparator with strobe

Datasheet - production data

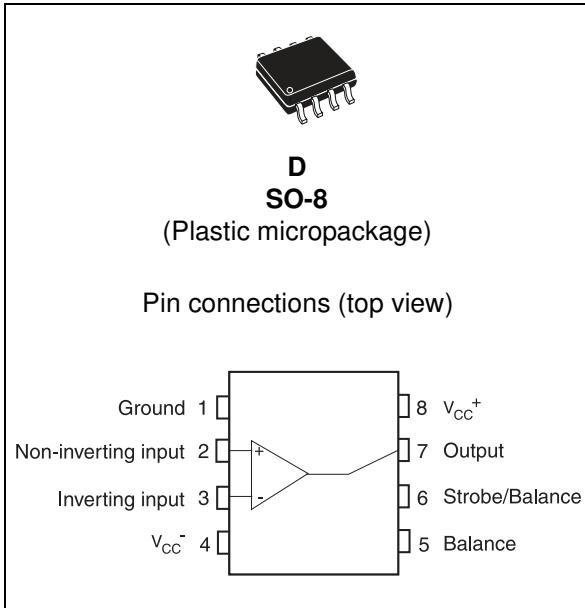

Description

The LM211, LM311 are voltage comparators that have low input currents.

They are also designed to operate over a wide range of supply voltages: from standard ± 15 V operational amplifier supplies down to the single +5 V supply used for IC logic.

Their output is compatible with RTL-DTL and TTL as well as MOS circuits and can switch voltages up to +50 V at output currents as high as 50 mA.

Features

- Maximum input current: 150 nA
- Maximum offset current: 20 nA
- Differential input voltage range: ± 30 V
- Power consumption: 135 mW at ± 15 V
- Supply voltage: +5 V to ± 15 V
- Output current: 50 mA

Table 1. Order codes


| Part number | Temperature range | Package | Packing | Marking |
|-------------|-------------------|---------|---------------------|---------|
| LM211D/DT | -40 °C, +105 °C | SO-8 | Tube or tape & reel | 211 |
| LM311D/DT | 0 °C, +70 °C | | | 311 |

Contents

| | | |
|----------|--|-----------|
| 1 | Schematic diagram | 3 |
| 2 | Absolute maximum ratings & operating conditions | 4 |
| 3 | Electrical characteristics | 5 |
| 4 | Typical application schematics | 9 |
| 5 | Package mechanical data | 10 |
| 5.1 | SO-8 package information | 11 |
| 6 | Revision history | 12 |

1 Schematic diagram

Figure 1. Schematic diagram

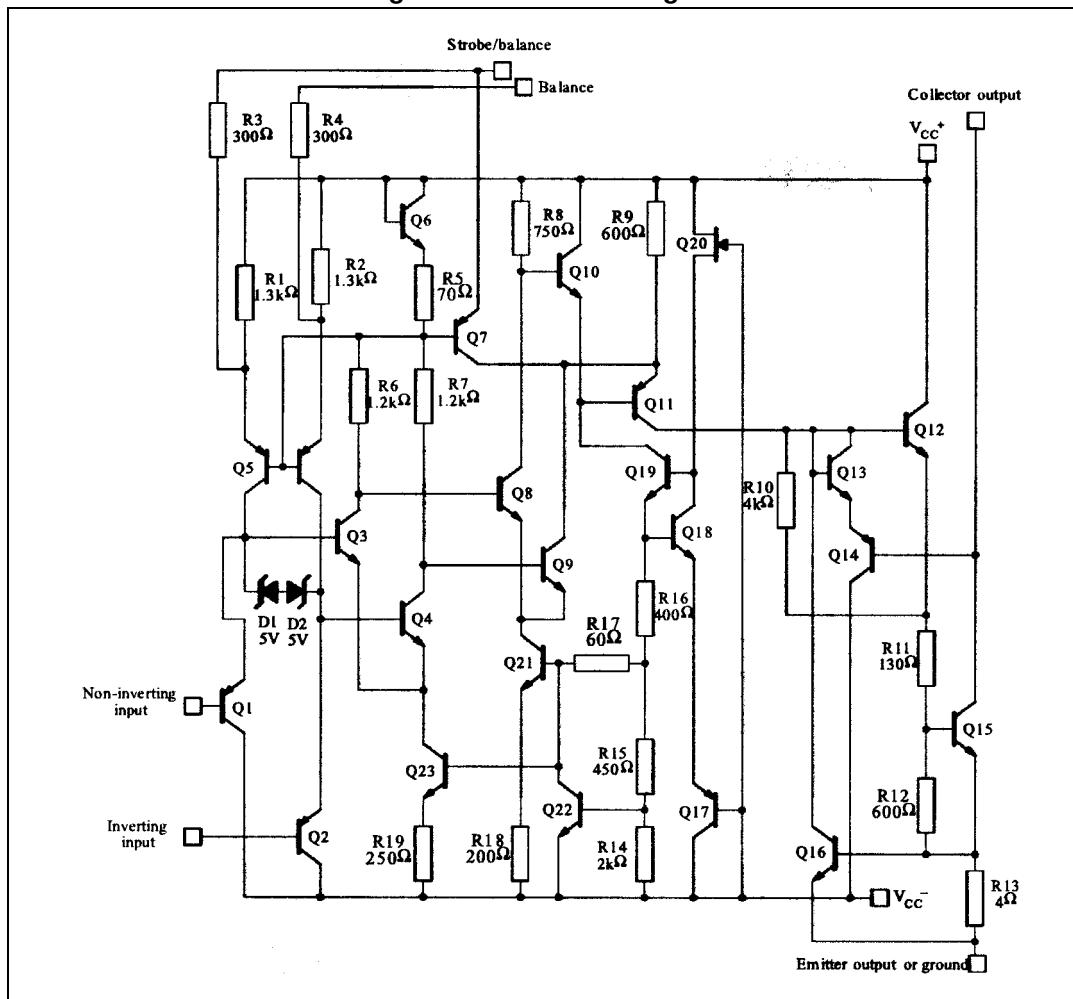

2 Absolute maximum ratings & operating conditions

Table 2. Absolute maximum ratings (AMR)

| Symbol | Parameter | Value | Unit |
|-------------|--|--------------------|------|
| V_{CC} | Supply voltage | 36 | V |
| V_{id} | Differential input voltage | ± 30 | V |
| V_i | Input voltage ⁽¹⁾ | ± 15 | V |
| $V_{(1-4)}$ | Ground to negative supply voltage | 30 | V |
| $V_{(7-4)}$ | Output to negative supply voltage LM211 LM311 | 50 40 | V |
| | Output short-circuit duration | 10 | s |
| | Voltage at strobe pin | $V_{CC}^+ - 5$ | V |
| P_d | Power dissipation ⁽²⁾ SO-8 | 710 | mW |
| T_j | Junction temperature | +150 | °C |
| T_{stg} | Storage temperature range | -65 to +150 | °C |
| ESD | Human Body Model (HBM) Charged Device Model (CDM) Machine Model (MM) | 800 1500 200 | V |

1. This rating applies for ± 15 V supplies. The positive input voltage limit is 30V above the negative. The negative input voltage is equal to the negative supply voltage or 30V below the positive supply, whichever is less.
2. P_d is calculated with $T_{amb} = +25^\circ\text{C}$, $T_j = +150^\circ\text{C}$ and $R_{thja} = 175^\circ\text{C}/\text{W}$ for the SO-8 package.

Table 3. Operating conditions






| Symbol | Parameter | Value | Unit |
|------------|--|-------------------------|------|
| V_{CC} | Supply voltage | 5 to ± 15 | V |
| T_{oper} | Operating free-air temperature range LM211 LM311 | -40 to +105 0 to +70 | °C |






3 Electrical characteristics





Table 4. $V_{CC+} = \pm 15$ V, $T_{amb} = +25$ °C (unless otherwise specified)

| Symbol | Parameter | Conditions | LM211 | | | LM311 | | | Unit |
|--------------------------|-------------------------------------|--|----------------|------------|------------|----------------|------------|------------|------|
| | | | Min. | Typ. | Max. | Min. | Typ. | Max. | |
| V_{io} | Input offset voltage ⁽¹⁾ | $R_S \leq 50\text{k}\Omega$ $T_{amb} = +25^\circ\text{C}$ $T_{min} \leq T_{amb} \leq T_{max}$ | | 0.7 4 | 3 4 | | 2 | 7.5 10 | mV |
| I_{io} | Input offset current ⁽¹⁾ | $T_{amb} = +25^\circ\text{C}$ $T_{min} \leq T_{amb} \leq T_{max}$ | | 4 | 10 20 | | 6 | 50 70 | nA |
| I_{ib} | Input bias current ⁽¹⁾ | $T_{amb} = +25^\circ\text{C}$ $T_{min} \leq T_{amb} \leq T_{max}$ | | 60 | 100 150 | | 100 | 250 300 | nA |
| A_{vd} | Large signal voltage gain | | 40 | 200 | | 40 | 200 | | V/mV |
| I_{cc^+} I_{cc^-} | Supply currents | Positive Negative | | 5.1 4.1 | 6 5 | | 5.1 4.1 | 7.5 5 | mA |
| V_{icm} | Input common mode voltage range | $T_{min} \leq T_{amb} \leq T_{max}$ | -14.5 -14.7 | +13.8 | +13 | -14.5 -14.7 | +13.8 | +13 | V |
| V_{OL} | Low level output voltage | $T_{amb} = +25^\circ\text{C}, I_O = 50\text{mA}, V_i \leq -5\text{mV}$ | | 0.75 | 1.5 | | | | V |
| | | $T_{amb} = +25^\circ\text{C}, I_O = 50\text{mA}, V_i \leq -10\text{mV}$ | | | | | 0.75 | 1.5 | |
| | | $T_{min} \leq T_{amb} \leq T_{max}$ $V_{CC^+} \geq +4.5\text{V}, V_{CC^-} = 0$ $I_O = 8\text{mA}, V_i \leq -6\text{mV}$ | | 0.23 | 0.4 | | | | |
| | | $T_{min} \leq T_{amb} \leq T_{max}$ $V_{CC^+} \geq +4.5\text{V}, V_{CC^-} = 0$ $I_O = 8\text{mA}, V_i \leq -10\text{mV}$ | | | | | 0.23 | 0.4 | |
| I_{OH} | High level output current | $T_{amb} = +25^\circ\text{C}$ $V_i \geq +5\text{mV}, V_O = +35\text{V}$ | | 0.2 | 10 | | | | nA |
| | | $T_{amb} = +25^\circ\text{C}$ $V_i \geq +10\text{mV}, V_O = +35\text{V}$ | | | | | 0.2 | 50 | nA |
| | | $T_{min} \leq T_{amb} \leq T_{max}$ $V_i \geq +5\text{mV}, V_O = +35\text{V}$ | | 0.1 | 0.5 | | | | µA |
| I_{strobe} | Strobe current | | | 3 | | | 3 | | mA |
| t_{re} | Response time ⁽²⁾ | | | 200 | | | 200 | | ns |

1. The offset voltage, offset current and bias current specifications apply for any supply voltage from a single +5 V supply up to ±15 V supplies. The offset voltages and offset currents given are the maximum values required to drive the output down to +1 V or up to +14 V with a 1 mA load current. Thus, these parameters define an error band and take into account the worst-case of voltage gain and input impedance.
2. The response time specified is for a 100 mV input step with 5 mV overdrive.

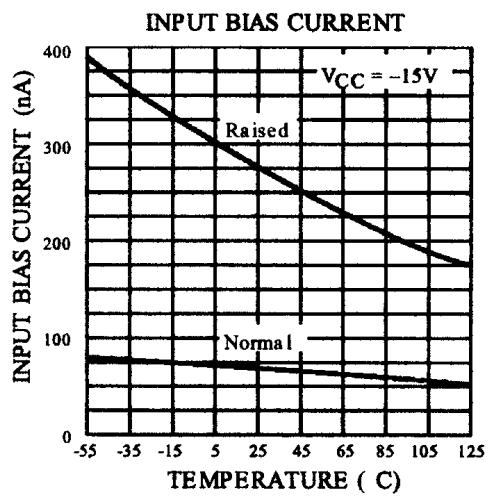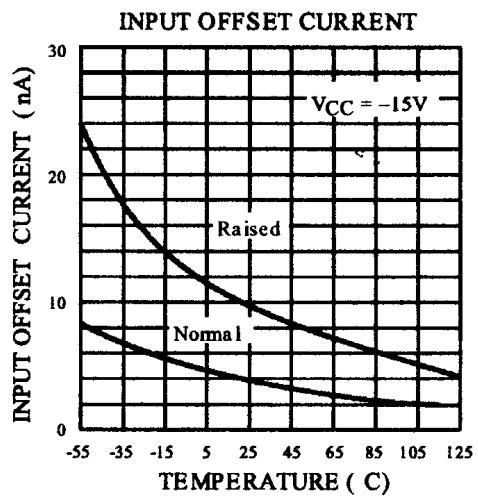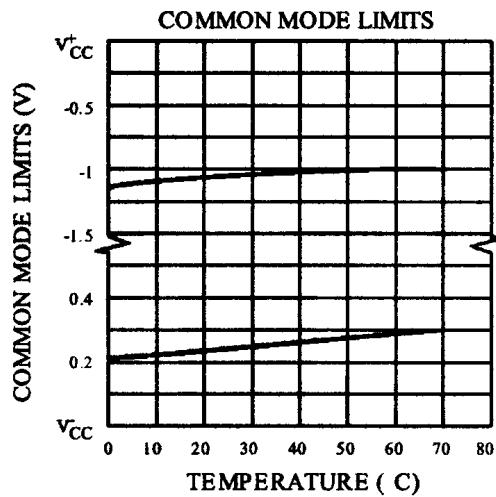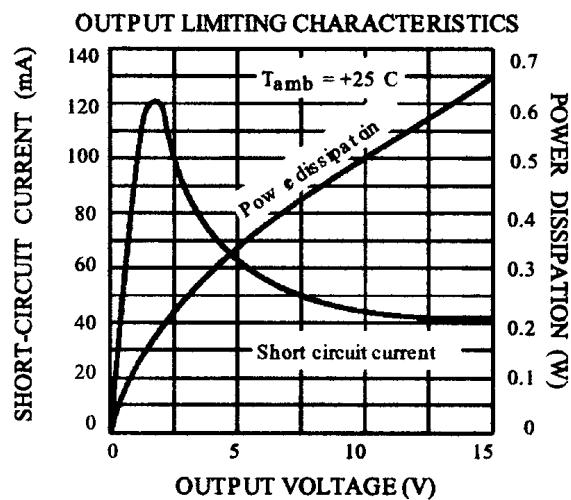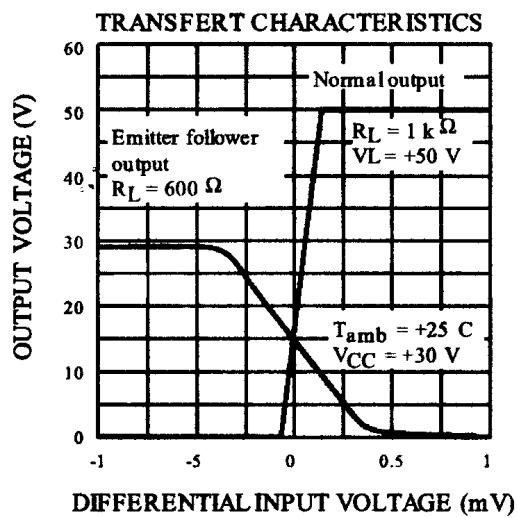

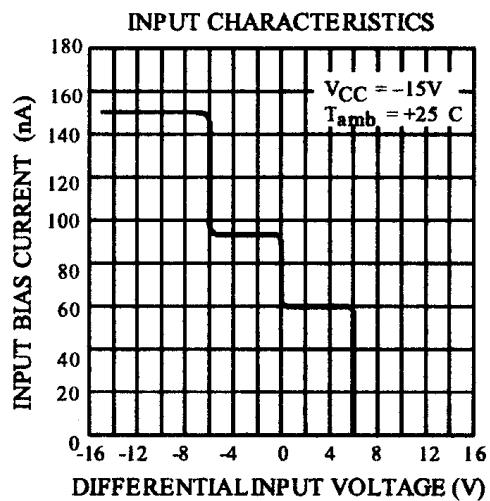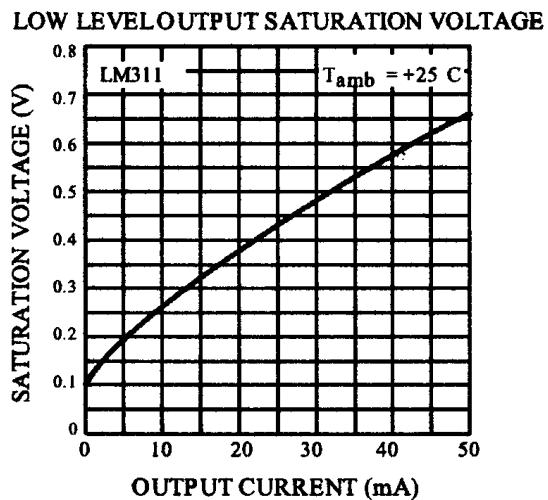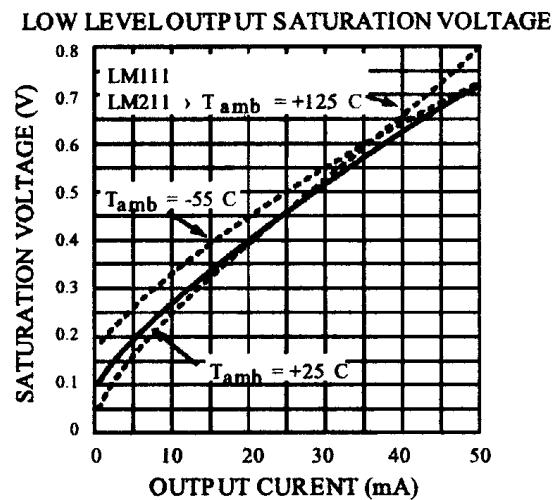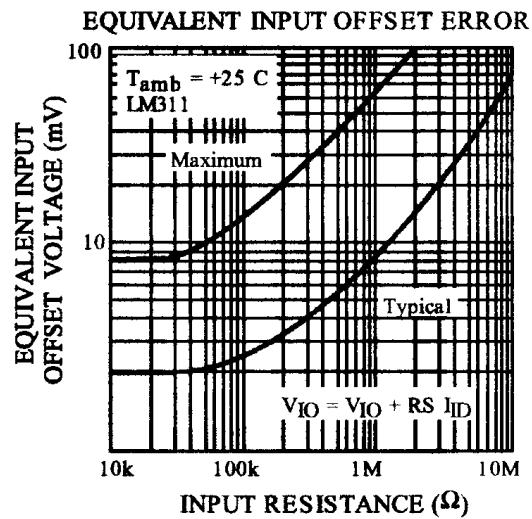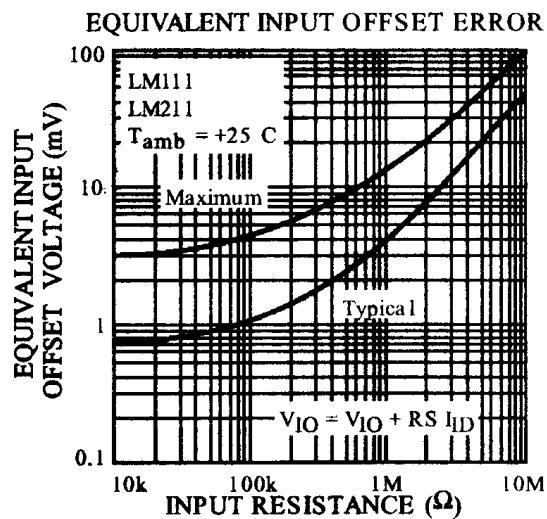


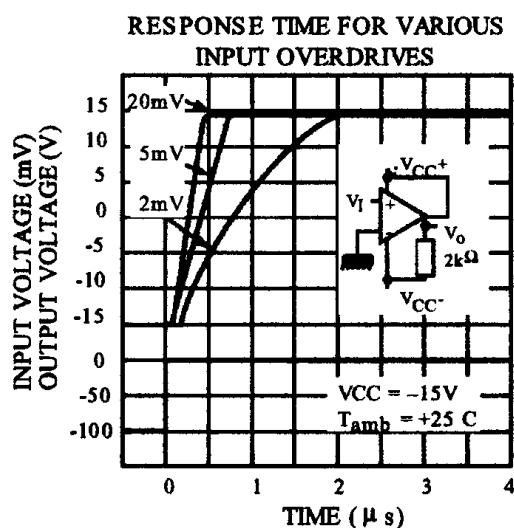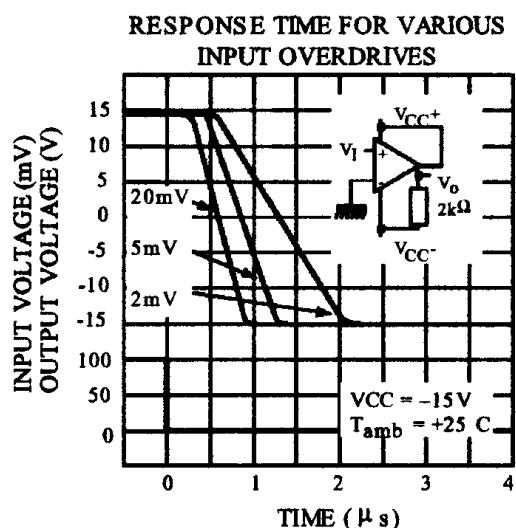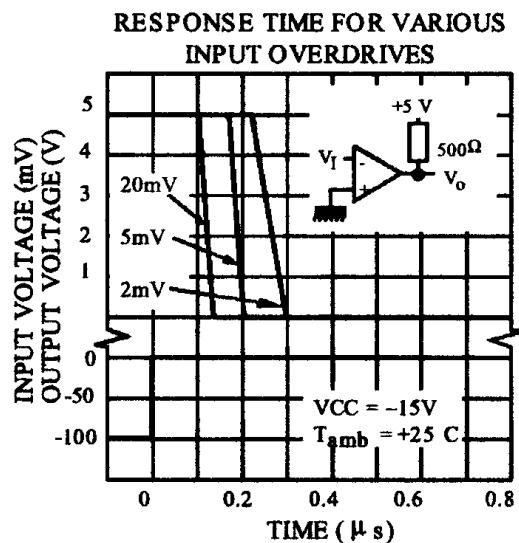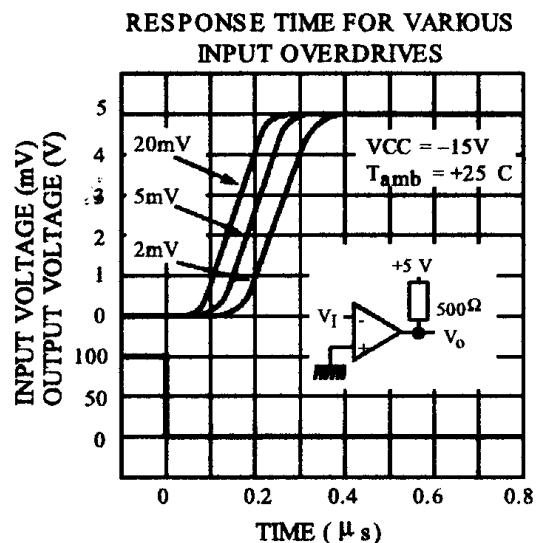


4 Typical application schematics

TYPICAL APPLICATIONS

CRYSTAL OSCILLATOR

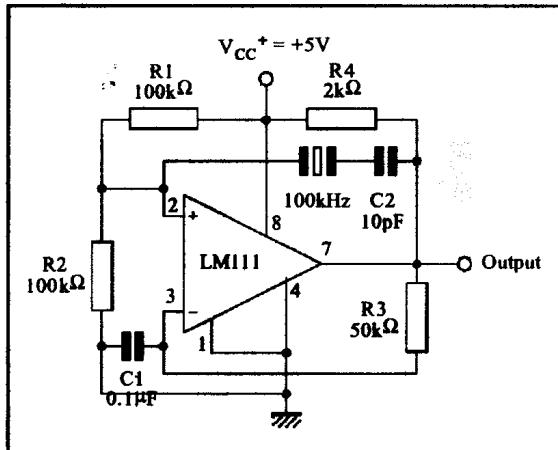


100KHz FREE RUNNING MULTIVIBRATOR

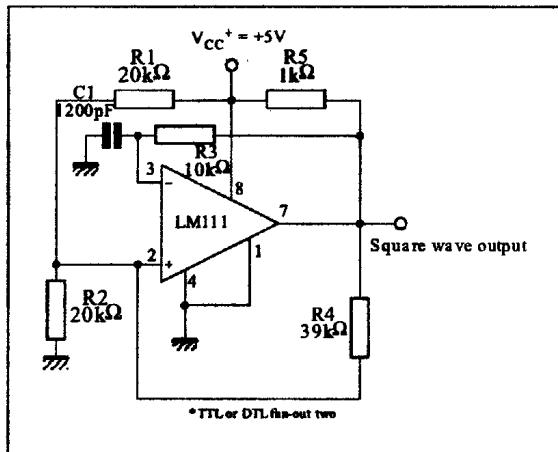


AUXILIARY CIRCUITS


STROBE

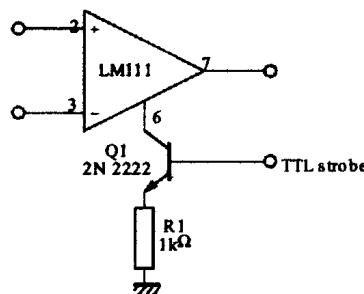

INCREASING INPUT STAGE CURRENT

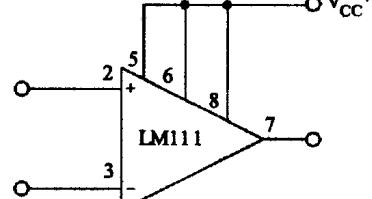

OFFSET BALANCING

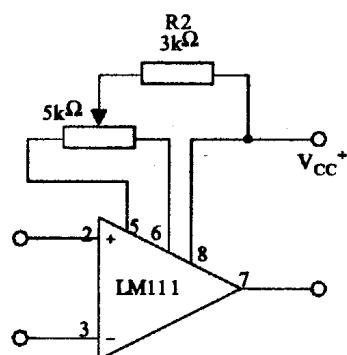

5 Package mechanical data

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: www.st.com.
ECOPACK is an ST trademark.

5.1 SO-8 package information

Figure 2. SO-8 package outline

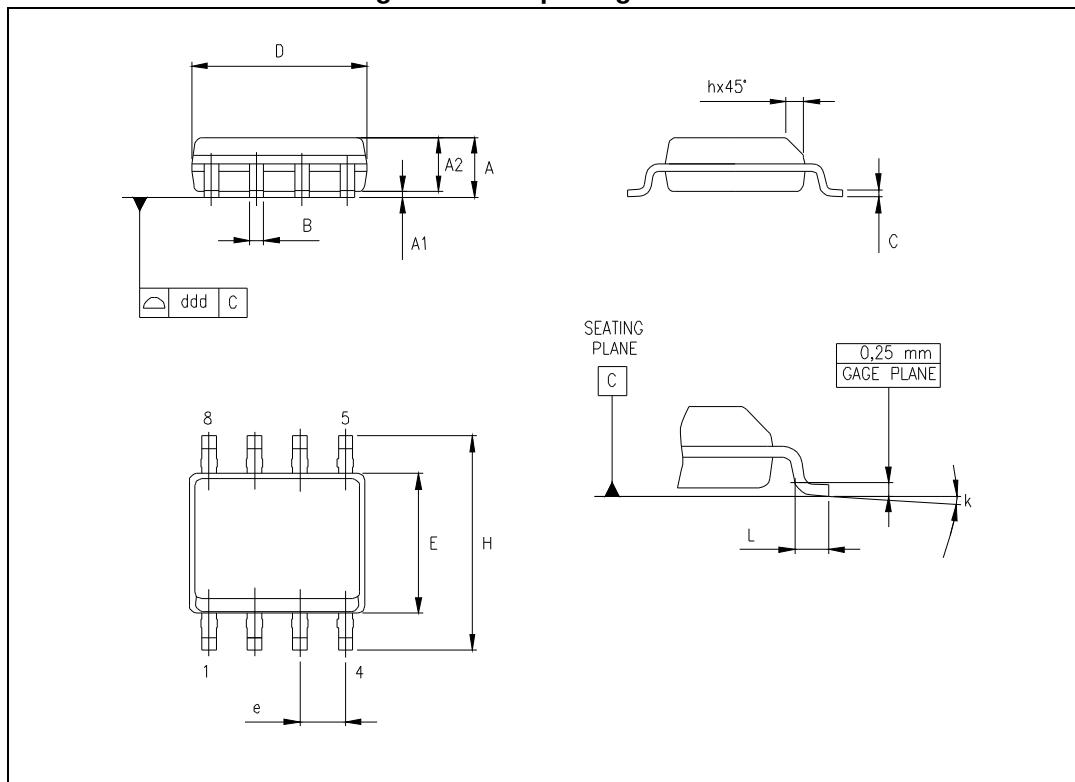


Table 5. SO-8 package mechanical data

| Symbol | Dimensions | | | | | |
|--------|-------------|------|------|-----------|-------|-------|
| | Millimeters | | | Inches | | |
| | Min. | Typ. | Max. | Min. | Typ. | Max. |
| A | 1.35 | - | 1.75 | 0.053 | - | 0.069 |
| A1 | 0.10 | - | 0.25 | 0.004 | - | 0.010 |
| A2 | 1.10 | - | 1.65 | 0.043 | - | 0.065 |
| B | 0.33 | - | 0.51 | 0.013 | - | 0.020 |
| C | 0.19 | - | 0.25 | 0.007 | - | 0.010 |
| D | 4.80 | - | 5.00 | 0.189 | - | 0.197 |
| E | 3.80 | - | 4.00 | 0.150 | - | 0.157 |
| e | - | 1.27 | - | - | 0.050 | - |
| H | 5.80 | - | 6.20 | 0.228 | - | 0.244 |
| h | 0.25 | - | 0.50 | 0.010 | - | 0.020 |
| L | 0.40 | - | 1.27 | 0.016 | - | 0.050 |
| k | 8° (max.) | | | 8° (max.) | | |
| ddd | - | - | 0.10 | - | - | 0.004 |

6 Revision history

Table 6. Document revision history

| Date | Revision | Changes |
|-------------|----------|---|
| 01-Jun-2002 | 1 | Initial release. |
| 02-Jan-2006 | 2 | Table 3. on page 5 updated. Formatting changes throughout. |
| 01-Mar-2006 | 3 | Pin connections updated on page 1. |
| 26-Sep-2006 | 4 | Corrected description under title on cover page. |
| 08-Jun-2022 | 5 | Added ESD parameter in Table 2 . |

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, please refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2022 STMicroelectronics – All rights reserved