


## Data sheet | Item number: 2273-204

COMPACT splicing connector; for solid conductors; max. 2.5 mm<sup>2</sup>; 4-conductor; transparent housing; red cover; Surrounding air temperature: max 60°C (T60); 2,50 mm<sup>2</sup>; transparent

[www.wago.com/2273-204](http://www.wago.com/2273-204)

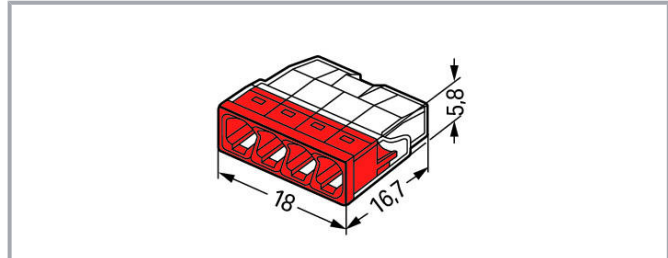

### Item description

Advantages:

- Convenient wiring via an extremely compact design
- Push-in termination of up to eight solid conductors
- Cross-section range: 0.5 ... 2.5 mm<sup>2</sup>
- Any combination of conductor sizes is possible
- PUSH WIRE® connection terminates solid ("s") copper conductors

### Safety information 1:

in grounded power lines

### Data

#### Electrical data

#### Ratings per IEC/EN

Ratings per	IEC/EN 60664-1
Nominal voltage (II/2)	450 V
Rated surge voltage (II/2)	4 kV
Rated current	24 A

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



Legend (ratings)

(II / 2)  $\triangleq$  Overvoltage category II / Pollution degree 2

## Connection data

Connection technology	PUSH WIRE®
Actuation type	Push-in
Connectable conductor materials	Copper Aluminum
Anschließbare Leiterwerkstoffe Hinweis	WAGO spring clamp terminal blocks are suitable for solid aluminum conductors up to 4 mm <sup>2</sup> /12 AWG if WAGO "Alu-Plus" Contact Paste is used for termination. "Alu-Plus" Contact Paste Advantages: <ul style="list-style-type: none"> <li>Automatically destroys the oxide film during clamping.</li> <li>Prevents fresh oxidation at the clamping point.</li> <li>Prevents electrolytic corrosion between aluminum and copper conductors (in the same terminal block).</li> <li>Provides long-term protection against corrosion.</li> </ul> For spring clamp connections with PUSH WIRE® connection technology, WAGO recommends that the aluminum conductor first be cleaned and then immediately inserted into the clamping unit filled with "Alu-Plus" contact paste. It is also possible to apply WAGO "Alu-Plus" additionally on the whole surface of the aluminum conductor before termination. Please note that the nominal currents must be adapted to the reduced conductivity of the aluminum conductors: 2.5 mm <sup>2</sup> = 16 A 4 mm <sup>2</sup> = 22 A
Solid conductor	0.5 ... 2.5 mm <sup>2</sup> / 20 ... 16 AWG
Strip length	11 mm / 0.43 inch
Total number of connection points	4
Total number of potentials	1
Wiring type	Side-entry wiring

## Physical data

Width	18 mm / 0.709 inch
Height	5.8 mm / 0.228 inch
Depth	16.7 mm / 0.657 inch

## Material data

Color	transparent
Cover color	red
Flammability class per UL94	V2
Fire load	0.025 MJ
Weight	1.3 g

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

## Environmental requirements


Surrounding air temperature (operation)	60 °C
Continuous operating temperature	105 °C
Temperature marking per EN 60998	T60

## Commercial data




Product Group	7 (Push Wire Conn.)
Packaging type	BOX
Country of origin	DE
GTIN	4050821027867
Customs tariff number	85369010000

## Approvals / Certificates

### Country specific Approvals

Logo	Approval	Additional Approval Text	Certificate name
	<b>VDE</b> VDE Prüf- und Zertifizierungsinstitut	EN 60998	40029794


### Ship Approvals

Logo	Approval	Additional Approval Text	Certificate name
	<b>ABS</b> American Bureau of Shipping	-	15- HG1419918- PDA
	<b>DNV GL</b> Det Norske Veritas, Germanischer Lloyd	EN 60998	TAE000015T
	<b>LR</b> Lloyds Register	EN 60998	04/20013 (E8)

Subject to changes. Please also observe the further product documentation!

## Compatible products

### Mounting adapter

	<b>Item no.: 2273-500</b> Mounting carrier; for single- and double-row con.; 2273 Series; for DIN-35 rail mounting/screw mounting; orange	<a href="http://www.wago.com/2273-500">www.wago.com/2273-500</a>
---	--	--

### General accessories

	<b>Item no.: 249-130</b> Syringe; Contents: 20 ml Alu-Plus contact paste	<a href="http://www.wago.com/249-130">www.wago.com/249-130</a>
---	---	--

## Downloads

### Documentation

#### Bid Text

2273-204 X81 - Datei	Feb 19, 2019	xml 3.2 kB	Download
-------------------------	--------------	---------------	----------

2273-204 doc - Datei	May 17, 2017	doc 25.1 kB	Download
-------------------------	--------------	----------------	----------

#### Additional Information

Technical explanations	Apr 3, 2019	pdf 2.2 MB	Download
------------------------	-------------	---------------	----------

## CAD/CAE-Data

### CAD data

2D/3D Models 2273-204	URL	Download
-----------------------	-----	----------

### CAE data

EPLAN Data Portal 2273-204	URL	Download
----------------------------	-----	----------

ZUKEN Portal 2273-204	URL	Download
-----------------------	-----	----------

WSCAD Universe 2273-204	URL	Download
-------------------------	-----	----------

## Environmental Product Compliance

### Compliance Search

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)


Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

Environmental Product Compliance 2273-204


COMPACT splicing connector; for solid conductors; max. 2.5 mm<sup>2</sup>; 4-conductor;  
transparent housing; red cover; Surrounding air temperature: max 60°C (T60); 2,50  
mm<sup>2</sup>; transparent

## Installation Notes

### Conductor termination

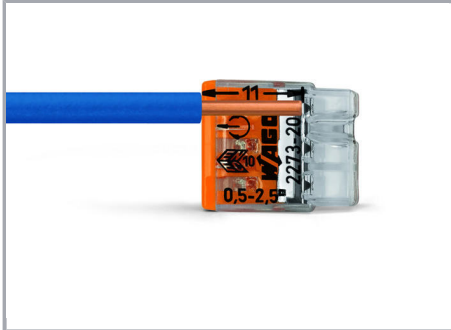


Strip solid conductor to 11 mm/0.43 inch  
(see marking).

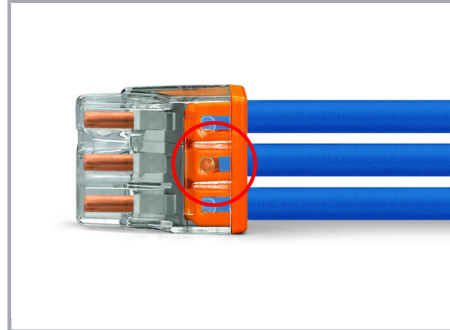


The transparent housing shows if  
conductors are fully inserted; within the  
colored base, a clear port shows if the  
conductor's strip length is correct.

Conductors are correctly stripped if the  
clear port shows no bare conductor on the  
unprinted connector side. Picture shows  
center conductor with exceeded strip length.

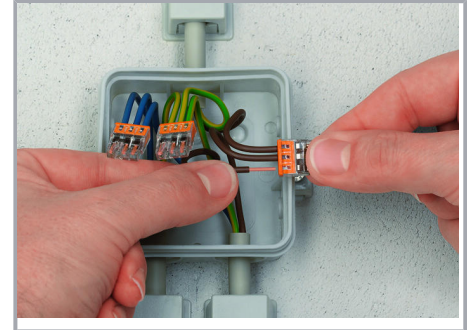

Termination: Insert the stripped solid  
conductor until it hits the backstop.

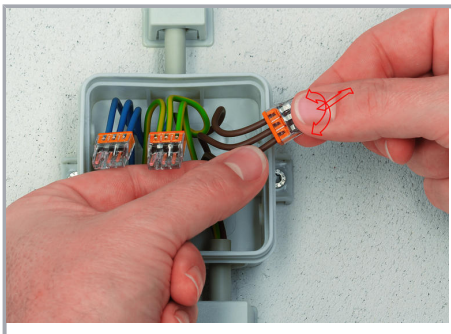

Removal: Hold conductor to be removed and  
twist alternately left and right while pulling  
the connector.

### Testing

Subject to changes. Please also observe the further product documentation!



Testing via test port opposite to conductor entry.

Subject to changes. Please also observe the further product documentation!