


Magn. Formkenngrößen/Satz

Eff. magn. parameters/set

Formfaktor core factor	$C_1 =$	1,45 mm ⁻¹
Eff. magn. Weglänge eff. magn. path length	$l_e =$	46,0 mm
Eff. magn. Querschnitt eff. magn. cross section	$A_e =$	32,0 mm ²
Min. Kernquerschnitt min. cross section	$A_{min} =$	31,6 mm ²
Eff. magn. Volumen eff. magn. volume	$V_e =$	1490 mm ³
Gewicht weight	$G =$	7,0 g

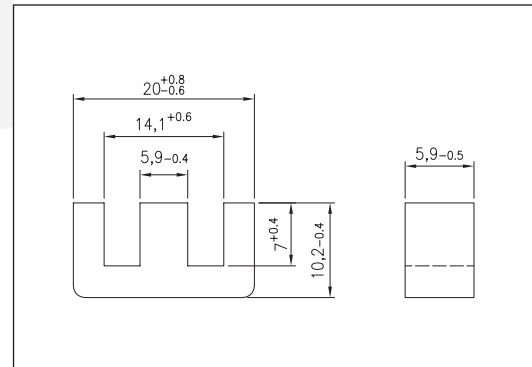

A_L -Wert A_L - value nH	Toleranz tolerance	Werkstoff material	Luftspalt airgap mm	μ_e	Bestellnummer order number
1300	± 25%	K 2004	-	≈ 1500	320 200600 024
1350	± 25%	K 2006	-	≈ 1560	320 200600 026
1500	± 25%	K 2008	-	≈ 1730	320 200600 028
≈ 200		K 2004	0,2	≈ 230	320 200620 024
≈ 105		K 2004	0,5	≈ 120	320 200650 024

Bei Anwendung in Leistungsübertragern
For application in power transformers

Werkstoff material	Messbedingungen test conditions	Verluste/Satz losses/set
K 2004	25kHz, 200mT, 100°C	≤ 0,26 W
K 2006	25kHz, 200mT, 100°C	≤ 0,17 W
K 2008	100kHz, 200mT, 100°C	≤ 0,74 W

All information given without liability. If you require further information about our products, do not hesitate to contact our representatives, or visit our homepage, www.kaschke.de.

Kaschke Components GmbH

Rudolf-Winkel-Straße 6 · 37079 Göttingen · Germany
Fon +49 (0) 551-5058-6 · Fax +49 (0) 551-65756
kaschke.de