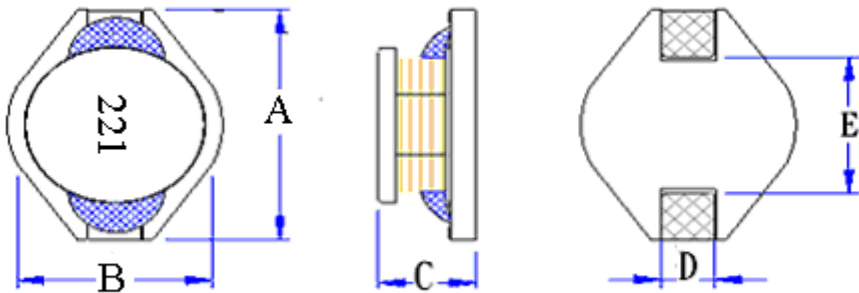
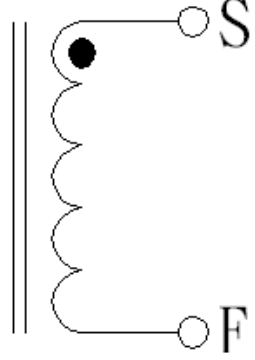


SPECIFICATION

CUSTOMER:		DATE:	
PART NO: DS5022-221M		DWG.NO:	
CUSTOMER PART NO:		CUST.DWG.NO:	
DIMENSION(UNIT: mm) 		A	18.80 (MAX) m/m
		B	15.50 (MAX) m/m
		C	7.20 (MAX) m/m
		D	2.54 (REF) m/m
		E	13.50 (REF) m/m
		F	m/m
		G	m/m
		H	m/m
		I	m/m
		J	m/m
		(2)ELECTRICAL REQUIREMENTS	
L (uH)	220 ± 20%		
RDC (Ω)	0.38 (MAX)		
IDC (A)	2.4 (MAX)		
TEST CONDITION	100KHZ / 0.1V		
		APPROVED BY	
		CHECKED BY	
		DRAWN BY	

TEST DATA

CUSTOMER:				DATE:			
PART NO: DS5022-221M				DWG.NO:			
CUSTOMER PART NO :				CUST.DWG.NO :			
TEST CONDITION: 100KHZ / 0.1V				DIMENSION (UNIT : mm)			
ITEM	L (uH)	RDC (Ω)	IDC (A)	A	B	C	
SPEC	220 ± 20%	0.38 (MAX)	2.4 (MAX)	18.80 (MAX)	15.50 (MAX)	7.20 (MAX)	
1	223.0	0.34	OK	18.18	14.07	6.80	
2	223.0	0.33	OK	18.08	14.00	6.86	
3	223.0	0.33	OK	18.05	14.02	6.84	
4	224.0	0.32	OK	18.08	14.00	6.81	
5	222.0	0.32	OK	18.11	14.01	6.79	
6	224.0	0.33	OK	18.09	14.00	6.76	
7	223.0	0.32	OK	18.03	14.02	6.75	
8	223.0	0.32	OK	18.16	14.04	6.80	
9	220.0	0.32	OK	18.37	14.09	6.79	
10	222.0	0.33	OK	18.25	14.05	6.80	
\bar{X}	222.7	0.326		18.14	14.03	6.8	
R	4	0.02		0.34	0.09	0.11	
TEST INSTRUMENTS HIOKI3532-50 LCR METER VR-131 RDC METER CH-301A BA/S CURRENT				APPROVED BY			
				CHECKED BY			
				DRAWN BY			