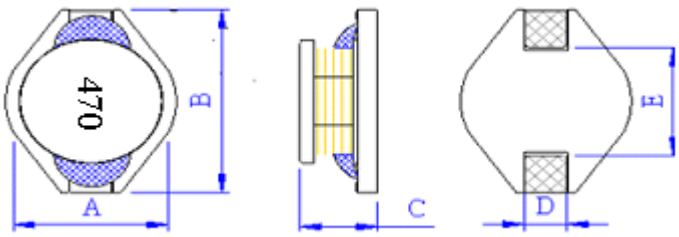
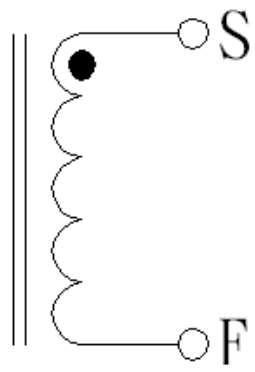


# SPECIFICATION

CUSTOMER:		DATE:	
PART NO: DS5022-470M		DWG.NO:	
CUSTOMER PART NO:		CUST.DWG.NO:	
DIMENSION(UNIT: mm)  		A	15.24 (MAX) m/m
		B	18.54 (MAX) m/m
		C	7.11 (MAX) m/m
		D	2.54 (REF) m/m
		E	13.50 (REF) m/m
		F	m/m
		G	m/m
		H	m/m
		I	m/m
		J	m/m
		(2)ELECTRICAL REQUIREMENTS	
L (uH)	47 ± 20%		
RDC (Ω)	0.077 (MAX)		
IDC (A)	5.5 (MAX)		
TEST CONDITION	100KHZ / 0.1V		
		APPROVED BY	
		CHECKED BY	
		DRAWN BY	

# TEST DATA

CUSTOMER:				DATE:			
PART NO: DS5022-470M				DWG.NO:			
CUSTOMER PART NO :				CUST.DWG.NO :			
TEST CONDITION: 100KHZ / 0.1V				DIMENSION (UNIT : mm)			
ITEM	L (uH)	RDC (Ω)	IDC (A)	A	B	C	
SPEC	47 ± 20%	0.077 (MAX)	5.5 (MAX)	15.24 (MAX)	18.54 (MAX)	7.11 (MAX)	
1	46.7	0.069	OK	15.10	18.20	6.90	
2	46.1	0.068	OK	15.08	18.32	6.93	
3	46.0	0.068	OK	15.09	18.31	6.92	
4	46.6	0.072	OK	15.10	18.29	6.94	
5	46.6	0.069	OK	15.13	18.17	6.90	
6	46.3	0.070	OK	15.10	18.25	6.95	
7	45.0	0.069	OK	15.14	18.30	6.92	
8	46.3	0.069	OK	15.13	18.17	6.88	
9	45.3	0.071	OK	15.13	18.18	6.98	
10	46.5	0.069	OK	15.11	18.30	6.91	
$\bar{X}$	46.14	0.069		15.111	18.249	6.923	
R	1.7	0.004		0.06	0.15	0.1	
TEST INSTRUMENTS HIOKI3532-50 LCR METER VR-131 RDC METER CH-301A BA/S CURRENT				APPROVED BY			
				CHECKED BY			
				DRAWN BY			