

Printview: 1-conductor PCB terminal strip; 1 solder pin/pole, staggered; 2-pole; pin spacing 3.5 mm / 0.138 in; with push-button; with test port for 1.3 mm Ø test pin - Item No.: 250-202

**WAGO**® online catalog / eShop

**1-conductor PCB terminal strip; 1 solder pin/pole, staggered; 2-pole; pin spacing 3.5 mm / 0.138 in; with push-button; with test port for 1.3 mm Ø test pin**

Item No.: 250-202



1-conductor PCB terminal strip; 1 solder pin/pole, staggered; 2-pole; pin spacing 3.5 mm / 0.138 in; with push-button; with test port for 1.3 mm Ø test pin

## Marking

RoHS ✓  
Compliant

## Business data

Supplier	WAGO
Item no.	250-202
GTIN / EAN	4044918648158
Content	1
Order amount	140
Customer item number	

## Notes

Compact terminal strips with push-buttons  
Simple, push-in terminations of solid and ferruled conductors  
Termination/removal of fine-stranded conductors via push-buttons  
45° conductor entry angle provides easy, space-saving wiring  
Custom color combinations  
Terminal strips also available with spacers upon request

## Technical data

### Miscellaneous

No. of Poles	2
Pin Spacing	3.5 mm / 0.138 in %
Total number of connection points	2
Total number of potentials	2
Color	gray
Ratings according to 1	IEC/EN 60664-1

<b>Technical data</b>	
Overvoltage category EN 1	III
Pollution degree (1)	2
Rated voltage EN (1) [V]	320 [V]
Rated surge voltage (1) [kV]	4 [kV]
Nominal current [A]	8 [A]
Overvoltage category EN 2	II
Degree of pollution (2)	2
Rated voltage EN (2) [V]	630 [V]
Rated surge voltage (2) [kV]	4 [kV]
Nominal current (2) [A]	8 [A]
Overvoltage category EN 3	III
Degree of pollution (3)	3
Rated voltage EN (3) [V]	250 [V]
Rated surge voltage (3) [kV]	4 [kV]
Nominal current (3) [A]	8 [A]
Number of individual connection objects at the product	1
Connection technology (1)	Push-in CAGE CLAMP®
Solid sizes 1	0.2 ... 1.5 mm <sup>2</sup> / 24 ... 16 AWG
Fine-stranded wires 1	0.2 ... 1.5 mm <sup>2</sup> / 24 ... 16 AWG
Fine-stranded wires with insulated ferrule 1	0.25 ... 1 mm <sup>2</sup> / ...
Fine-stranded wires with uninsulated ferrule 1	0.25 ... 1 mm <sup>2</sup> / ...
Strip length 1	8.5 ... 9.5 mm / 0.33 ... 0.37 in
Conductor entry angle to the PCB 1 [°]	45 [°]
Type of wiring	Front-entry wiring
Solder pin arrangement	1 staggered solder pin/pole
Solder pin length [mm]	3.6 [mm]
Tolerance of drilled hole [mm]	1(+ 0.1) [mm]
Material group	I
Insulating material	Polyamide 6.6 (PA 6.6)
Flammability rating per UL 94	V0
Limit temperature range	-60 C ... 105 C
Clamping spring material	Copper alloy
Contact plating	tin-plated
Fire load [MJ]	0.026 [MJ]

Printview: 1-conductor PCB terminal strip; 1 solder pin/pole, staggered; 2-pole; pin spacing 3.5 mm / 0.138 in; with push-button; with test port for 1.3 mm Ø test pin - Item No.: 250-202


Technical data	
Weight [g]	1.103 [g]
Width	8.5 mm / 0.335 in
Height	16.7 mm / 0.657 in
Height from the surface	13.1 mm / 0.516 in
Length	12 mm / 0.472 in

Approbation					
Item No.	Registration	Registration no.	Voltage [V]	Current [A]	Cross section [mm <sup>2</sup> , AWG]
250-202	ABS	04-HG469925/1-PDA	400	2	0,5-1,5
250-202	BV	11915/A0	200	2	0,5-1,5
250-202	CCA	NTR NL-7100	250	9	0.20-1.50
250-202	CCA	NTR NL 6920	250	8	0.20-0.75
250-202	CSA	154112-1132097	300	10	20-16
250-202	DNV	E-9215	400	2	0,5-1,5
250-202	GL	17296-00HH	400	2	0,5-1,5
250-202	UL	E45172	300	5	24-16
250-202	UL	E45171	600	2	20-16
250-202	VDE	40028888	250	8	0.20-0.75

Accessories		
General accessory		
Item no.	Description	Pack. unit (Sub Pack)
210-719	Operating tool with partially insulated shaft; Type 1, blade (2.5 x 0.4) mm; suitable for 279, 726, 727, 2000, 2001 and 2020 series	1

Printview: 1-conductor PCB terminal strip; 1 solder pin/pole, staggered; 2-pole; pin spacing 3.5 mm / 0.138 in; with push-button; with test port for 1.3 mm Ø test pin - Item No.: 250-202

Images & drawings

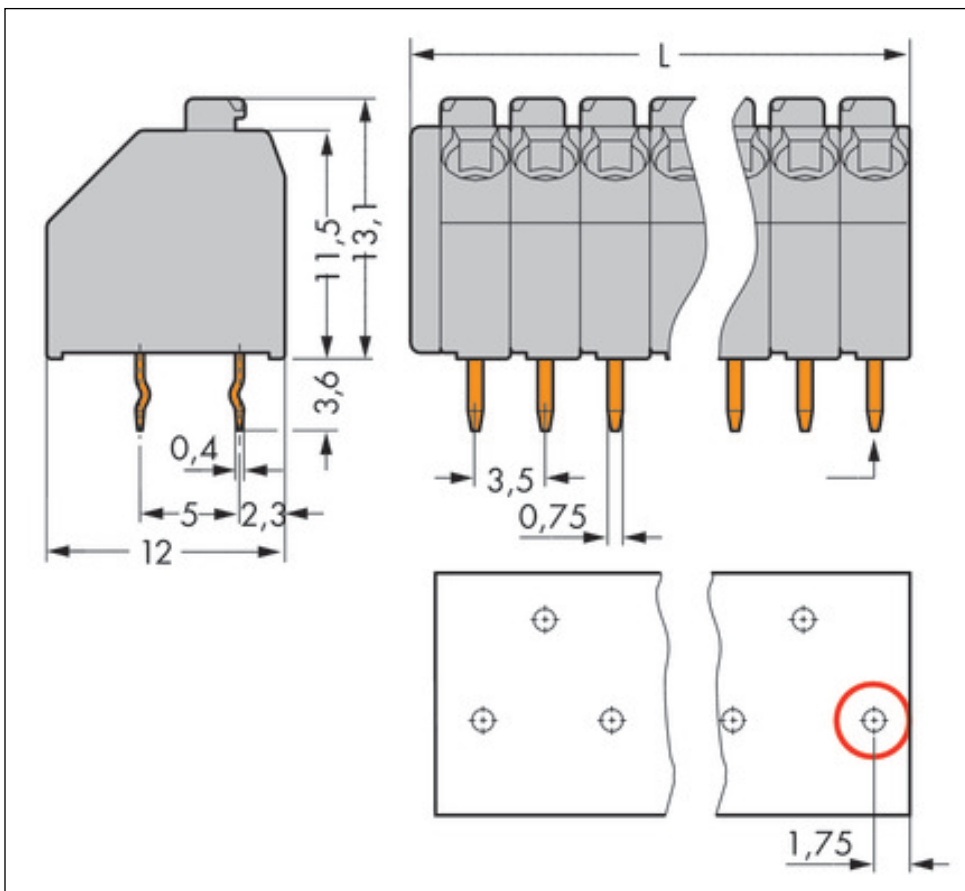

**Address**

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.