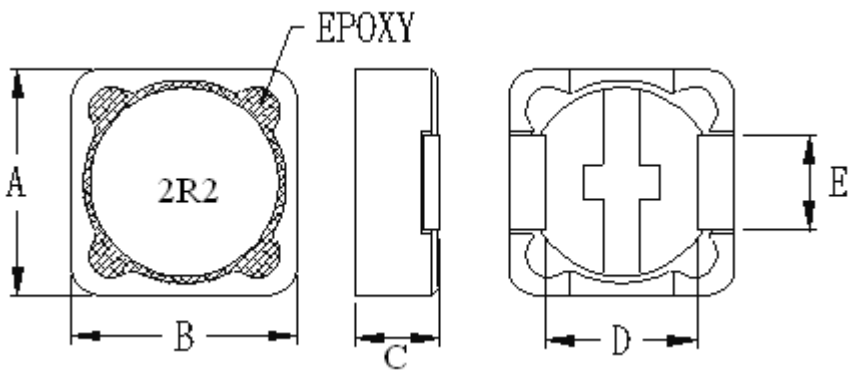
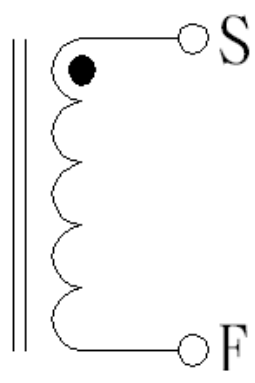






# SPECIFICATION FOR APPROVAL

CUSTOMER:		DATE:		
PART NO: SRI1205-2R2M		DWG.NO: MY3623996		
CUSTOMER PART NO:		CUST.DWG.NO:		
<p>(1) DIMENSION(UNIT: mm)</p> 		A	12.0 ± 0.5	m/m
		B	12.0 ± 0.5	m/m
		C	6.0 (MAX)	m/m
		D	7.6 ± 0.2	m/m
		E	5.0 ± 0.2	m/m
		F		m/m
		G		m/m
		H		m/m
		I		m/m
		J		m/m
		(2)ELECTRICAL REQUIREMENTS		(3)SCHEMATIC
L (uH)	2.2 ± 20%			
RDC (Ω)	0.014 (MAX)			
IDC (A)	11 (MAX)			
TEST CONDITION	100KHZ/0.1V			
<p style="text-align: center;"><b>CORE MASTER ENTERPRISE CO., LTD.</b></p> <p>TEL:886-2-8919-1288    FAX:886-2-8919-1298    WEB:www.coremaster.com.tw</p>		APPROVED BY		
		CHECKED BY		
		DRAWN BY		

# TEST DATA

CUSTOMER:				DATE:			
PART NO: SRI1205-2R2M				DWG.NO: MY3623996			
CUSTOMER PART NO :				CUST.DWG.NO :			
TEST CONDITION: 100KHZ/0.1V				DIMENSION (UNIT : mm)			
ITEM	L (uH)	RDC (Ω)	IDC (A)	A	B	C	
SPEC	2.2 ± 20%	0.014 (MAX)	11 (MAX)	12.0 ± 0.5	12.0 ± 0.5	6.0 (MAX)	
1	2.26	0.008	OK	12.07	12.09	5.67	
2	2.14	0.007	OK	12.05	12.10	5.65	
3	2.37	0.008	OK	12.04	12.13	5.64	
4	2.42	0.008	OK	12.08	12.07	5.63	
5	2.23	0.008	OK	12.06	12.04	5.63	
6	2.25	0.008	OK	12.08	12.04	5.63	
7	2.47	0.008	OK	12.11	12.07	5.64	
8	2.56	0.007	OK	12.04	12.11	5.61	
9	2.24	0.007	OK	12.01	12.07	5.68	
10	2.34	0.008	OK	12.03	12.06	5.63	
$\bar{X}$	2.328	0.008		12.057	12.078	5.641	
R	0.42	0.001		0.1	0.09	0.07	
TEST INSTRUMENTS HIOKI3532-50 LCR METER VR-131 RDC METER CH-301A BA/S CURRENT				APPROVED BY			
							
				CHECKED BY			
							
				DRAWN BY			
							

**CORE MASTER ENTERPRISE CO., LTD.**

TEL:886-2-8919-1288

FAX:886-2-8919-1298

WEB:www.coremaster.com.tw