
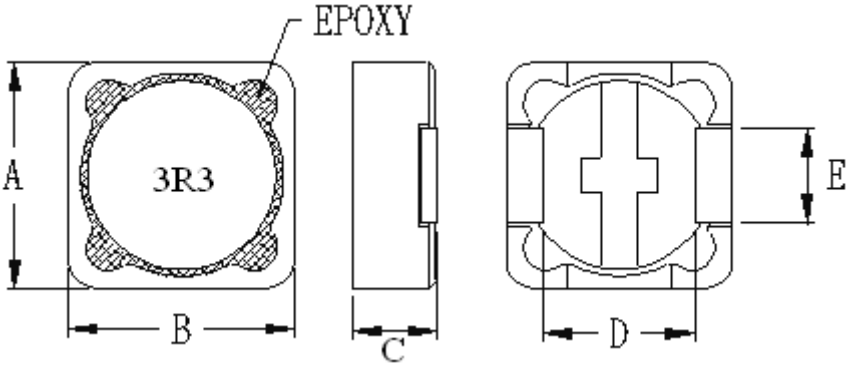


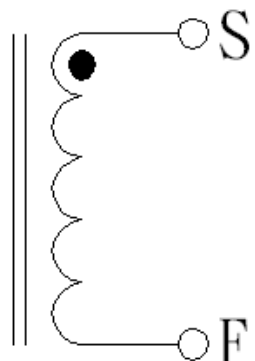





# SPECIFICATION FOR APPROVAL

CUSTOMER:		DATE:	
PART NO: SRI1205-3R3M		DWG.NO: MY1003126	
CUSTOMER PART NO:		CUST.DWG.NO:	
<p>(1) DIMENSION(UNIT: mm)</p> 		A	12.0 ± 0.5 m/m
		B	12.0 ± 0.5 m/m
		C	6.0 (MAX) m/m
		D	7.6 ± 0.2 m/m
		E	5.0 ± 0.2 m/m
		F	m/m
		G	m/m
		H	m/m
		I	m/m
		J	m/m
		(2) ELECTRICAL REQUIREMENTS	
L (uH)	3.3 ± 20%		
RDC (Ω)	0.017 (MAX)		
IDC (A)	8 (MAX)		
TEST CONDITION	100KHZ / 0.25V		
(4) REMARK		APPROVED BY	
CORE:DR9.9×5 B4.8 F3.1 , RI12×5×10.6			
WIRE:2UEWΦ0.45m/m*2P*6.5TS(REF)			
BASE:彈片 C-1200-1A			
		CHECKED BY	
			
		DRAWN BY	
			

**CORE MASTER ENTERPRISE CO., LTD.**

TEL:886-2-8919-1288    FAX:886-2-8919-1298    WEB:www.coremaster.com.tw

# TEST DATA

CUSTOMER:				DATE:									
PART NO: SRI1205-3R3M				DWG.NO: MY1003126									
CUSTOMER PART NO :				CUST.DWG.NO :									
TEST CONDITION: 100KHZ / 0.25V				DIMENSION (UNIT : mm)									
ITEM	L (uH)	RDC (Ω)	IDC (A)	A	B	C							
SPEC	3.3 ± 20%	0.017 (MAX)	8 (MAX)	12.0 ± 0.5	12.0 ± 0.5	6.0 (MAX)							
1	3.05	0.009	OK	12.09	12.07	5.60							
2	3.15	0.009	OK	12.07	12.07	5.59							
3	3.21	0.008	OK	12.10	12.07	5.61							
4	3.24	0.009	OK	12.09	12.08	5.63							
5	3.15	0.009	OK	12.06	12.06	5.63							
6	3.17	0.008	OK	12.08	12.10	5.64							
7	3.03	0.008	OK	12.08	12.10	5.60							
8	3.01	0.008	OK	12.06	12.07	5.63							
9	3.10	0.008	OK	12.07	12.06	5.64							
10	3.12	0.008	OK	12.08	12.05	5.63							
$\bar{X}$	3.123	0.008		12.078	12.073	5.62							
R	0.23	0.001		0.04	0.05	0.05							
TEST INSTRUMENTS HIOKI3532-50 LCR METER VR-131 RDC METER VR116+VR7220 BA/S CURRENT				APPROVED BY									
								CHECKED BY					
								DRAWN BY					

**CORE MASTER ENTERPRISE CO., LTD.**

TEL:886-2-8919-1288    FAX:886-2-8919-1298    WEB:www.coremaster.com.tw