
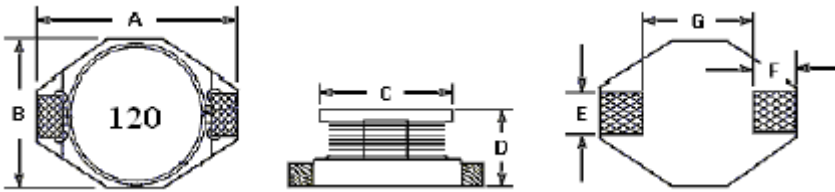


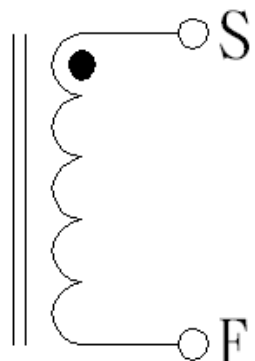




SPECIFICATION FOR APPROVAL

CUSTOMER:		DATE:	
PART NO: DS3316-120M		DWG.NO: MY1113912	
CUSTOMER PART NO:		CUST.DWG.NO:	
(1) DIMENSION(UNIT: mm) 		A	12.95 (MAX) m/m
		B	9.40 (MAX) m/m
		C	8.38 (MAX) m/m
		D	5.21 (MAX) m/m
		E	2.54 (REF) m/m
		F	2.54 (REF) m/m
		G	7.62 (REF) m/m
		H	m/m
		I	m/m
		J	m/m
		(2)ELECTRICAL REQUIREMENTS	
L (uH)	12 ± 20%		
RDC (Ω)	0.062 (MAX)		
IDC (A)	5.1 (MAX)		
TEST CONDITION	100KHZ / 0.1V		
		APPROVED BY 	
		CHECKED BY 	
		DRAWN BY 	

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB: www.coremaster.com.tw

TEST DATA

CUSTOMER:				DATE:			
PART NO: DS3316-120M				DWG.NO: MY1113912			
CUSTOMER PART NO :				CUST.DWG.NO :			
TEST CONDITION: 100KHZ / 0.1V				DIMENSION (UNIT : mm)			
ITEM	L (uH)	RDC (Ω)	IDC (A)	A	B	D	
SPEC	12 ± 20%	0.062 (MAX)	5.1 (MAX)	12.95 (MAX)	9.40 (MAX)	5.21 (MAX)	
1	11.3	0.053	OK	12.88	9.26	5.01	
2	11.4	0.051	OK	12.83	9.27	5.01	
3	11.3	0.053	OK	12.86	9.26	5.01	
4	11.3	0.053	OK	12.87	9.24	5.03	
5	11.2	0.050	OK	12.84	9.24	4.98	
6	11.6	0.052	OK	12.87	9.24	4.93	
7	11.2	0.053	OK	12.89	9.25	5.01	
8	11.2	0.052	OK	12.84	9.28	5.04	
9	11.2	0.053	OK	12.85	9.24	5.04	
10	11.4	0.051	OK	12.88	9.25	4.98	
\bar{X}	11.31	0.052		12.861	9.253	5.004	
R	0.4	0.003		0.06	0.04	0.11	
TEST INSTRUMENTS HIOKI3532-50 LCR METER VR-131 RDC METER VR116+VR7220 BA/S CURRENT				APPROVED BY			
							
				CHECKED BY			
							
				DRAWN BY			
							

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB: www.coremaster.com.tw