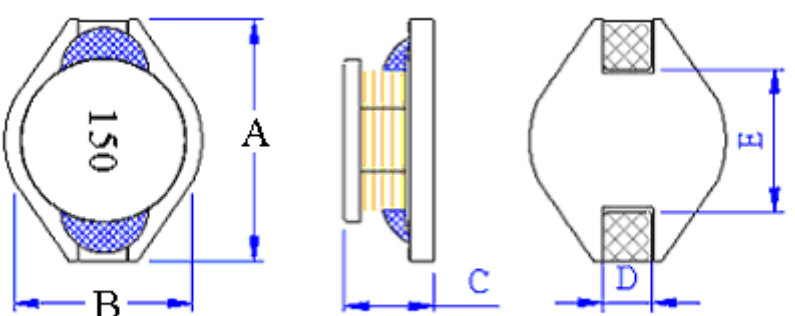
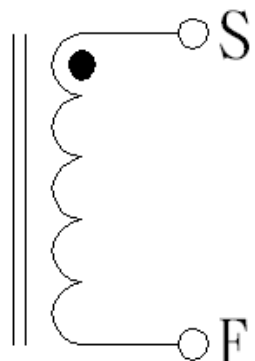





# SPECIFICATION FOR APPROVAL

CUSTOMER:		DATE:
PART NO: DS3316-150M		DWG.NO: MY1123366
CUSTOMER PART NO:		CUST.DWG.NO:
(1) DIMENSION(UNIT: mm)  		A 13.50 (MAX) m/m
		B 9.50 (MAX) m/m
		C 5.20 (MAX) m/m
		D 2.54 (REF) m/m
		E 8.00 (REF) m/m
		F m/m
		G m/m
		H m/m
		I m/m
		J m/m
(2)ELECTRICAL REQUIREMENTS		(3)SCHEMATIC
L (uH)	15 ± 20%	
RDC (Ω)	0.046 (MAX)	
IDC (A)	3.1 (MAX)	
TEST CONDITION	100KHZ / 0.1V	
APPROVED BY  CHECKED BY  DRAWN BY 		

**CORE MASTER ENTERPRISE CO., LTD.**

TEL:886-2-8919-1288    FAX:886-2-8919-1298    WEB: www.coremaster.com.tw

# TEST DATA

CUSTOMER:				DATE:			
PART NO: DS3316-150M				DWG.NO: MY1123366			
CUSTOMER PART NO :				CUST.DWG.NO :			
TEST CONDITION: 100KHZ / 0.1V				DIMENSION (UNIT : mm)			
ITEM	L (uH)	RDC (Ω)	IDC (A)	A	B	C	
SPEC	15 ± 20%	0.046 (MAX)	3.1 (MAX)	13.50 (MAX)	9.50 (MAX)	5.20 (MAX)	
1	16.9	0.045	OK	12.70	9.28	4.92	
2	15.7	0.046	OK	12.71	9.27	4.90	
3	16.7	0.045	OK	12.68	9.30	4.89	
4	16.9	0.046	OK	12.72	9.27	4.92	
5	16.7	0.045	OK	12.72	9.28	4.97	
6	16.8	0.046	OK	12.70	9.26	4.89	
7	16.6	0.046	OK	12.68	9.30	4.92	
8	15.7	0.046	OK	12.66	9.26	4.90	
9	16.9	0.046	OK	12.78	9.28	4.92	
10	16.7	0.046	OK	12.74	9.27	4.90	
$\bar{X}$	16.56	0.046		12.709	9.277	4.913	
R	1.2	0.001		0.12	0.04	0.08	
TEST INSTRUMENTS HIOKI3532-50 LCR METER VR-131 RDC METER VR116+VR7220 BA/S CURRENT				APPROVED BY			
							
				CHECKED BY			
							
				DRAWN BY			
							

**CORE MASTER ENTERPRISE CO., LTD.**

TEL:886-2-8919-1288    FAX:886-2-8919-1298    WEB: www.coremaster.com.tw