



晶采光電科技股份有限公司
AMPIRE CO., LTD.

SPECIFICATIONS FOR LCD MODULE

CUSTOMER	
CUSTOMER PART NO.	
AMPIRE PART NO.	AG-240128GFICW-30-D(T)(R)
APPROVED BY	
DATE	

☐ Approved For Specifications

☐ Approved For Specifications & Sample

AMPIRE CO., LTD.

**Building A., 4F., No.116, Sec. 1, Sintai 5th Rd., Xizhi Dist,
New Taipei City 221, Taiwan (R.O.C.)**

新北市汐止區新台五路一段 116 號 4 樓(東方科學園區 A 棟)

TEL:886-2-26967269 , FAX:886-2-26967196 or 26967270

APPROVED BY	CHECKED BY	ORGANIZED BY

RECORD OF REVISION

Revision Date	Page	Contents	Editor
2014/03/19	--	New Release	Tony

1 FEATURES

- (1) Display format : 240 × 128 dot-matrix ; 1/ 128 duty.
- (2) Construction : FSTN LCD, Bezel, Zebra ,Heat Seal, CCFL Back-light and PCB.
- (3) Display Type : FSTN, Transflective, 6 o'clock view.
- (4) Built in controller [RA6963L2NA-N1](#)
- (5) [PCB: 240128G Rev.G](#)
- (6) 5V single power input. Built-in DC/DC converter AIC1652 for LCD driving.
- (7) Normal temperature type.
- (8) ROHS compliant

2 MECHANICAL DATA

Parameter	Standard Value	Unit
Dot size	0.40 (W) × 0.40(H)	mm
Dot pitch	0.45(W) × 0.45(H)	mm
Viewing area	114.0(W) × 64.0(H)	mm
Module size (LED back-light)	144.0(W) × 104.0(H) × 15.0 max (T)	mm

3 ABSOLUTE MAXIMUM RATINGS

Parameter		Symbol	Min	Max	Unit
Logic Circuit Supply Voltage		VDD-VSS	0	7.0	V
LCD Driving Voltage		VDD-VO	0	26	V
Input Voltage		VI	VSS	VDD	V
Normal temp. type	Operating Temp.	TOP	0	50	°C
	Storage Temp.	TSTG	-20	70	°C


4 ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Condition	Min	Typ	Max	Unit	Note
----- Electronic Characteristics -----							
Logic Circuit Supply Voltage	VDD-VSS	--	4.75	5.0	5.25	V	
LCD Driving Voltage	VDD-VO	0 °C	17.6	18.5	19.4	V	0 ~ 50 °C for Normal Temp. type
		25 °C	17.3	18.2	19.1		
		50°C	16.9	17.8	18.7		
Input Voltage	VIH	--	0.7 VDD	--	VDD	V	
	VIL	--	VSS	--	0.3 VDD	V	
Logic Supply Current	IDD	VDD = 5V	--	45	--	mA	
----- Optical Characteristics -----							
Contrast	CR	FSTN type	--	5	--		Note 1
Rise Time	tr	25°C	--	117	--	ms	Note 2
Fall Time	tf	25°C	--	139	--	ms	
Viewing Angle Range	θ f	25°C & CR≥2	--	32	--	Deg.	Note 3
	θ b		--	28	--		
	θ l		--	30	--		
	θ r		--	30	--		
Frame Frequency	fF	25°C	--	64	--	Hz	


(NOTE 1) Contrast ratio :

CR = (Brightness in OFF state) / (Brightness in ON state)

(NOTE 2) Response time :

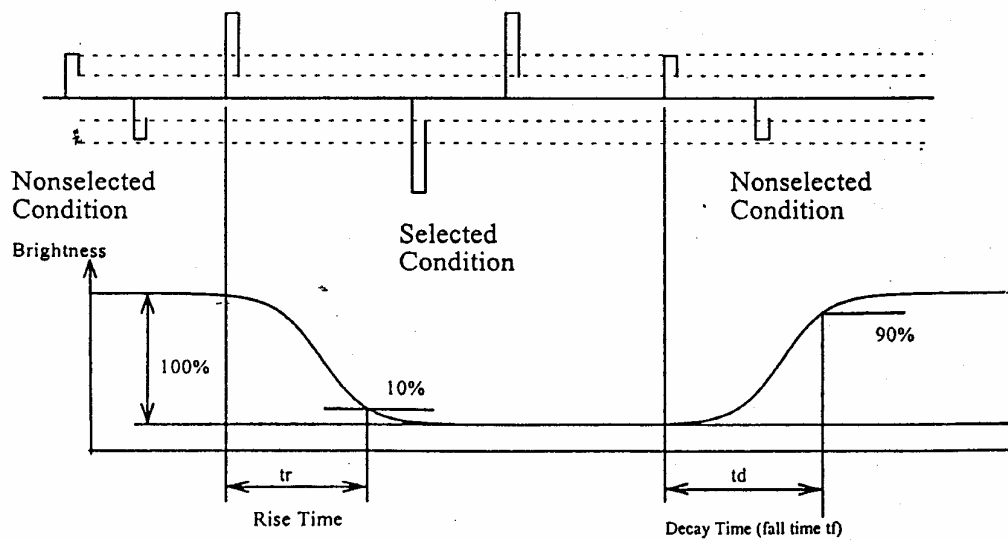

(NOTE 3) Viewing angle

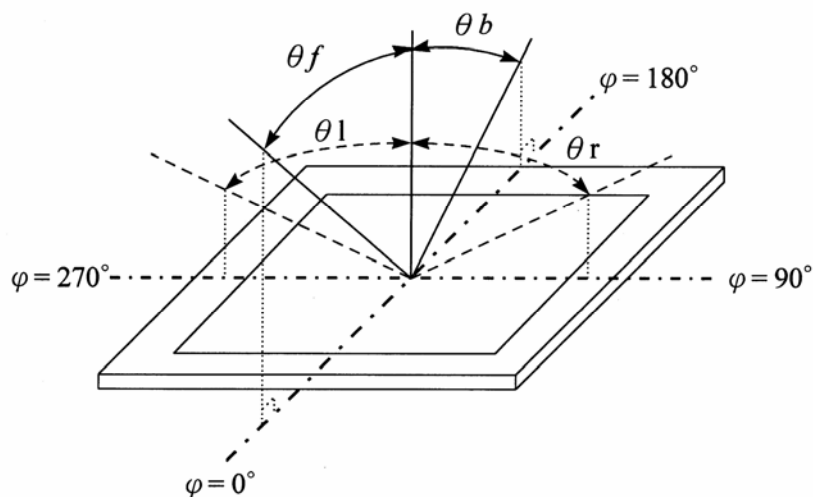

4.1 C.C.F.L. BACK-LIGHT SPECIFICATION

- (1) The brightness life of the back light shall be kept as specified under the following absolute maximum conditions:

Power Consumption 2.88 W
TA = 25 °C, fL = 37 ± 5 KHz (with DIYN 43 Inverter)
Tube Current 6.0 ± 0.5 mA
TA = 25 °C, fL = 37 ± 5 KHz

(2) Electrical Characteristics

The following operating conditions are recommended for the back light unit.



Start Voltage 975 Vrms min, at Ta=0 °C
Tube Voltage 390 ± 40 Vrms typ, at Ta=25 °C
Tube Current 5.0 ± 0.5 mA typ, at Ta=25 °C
Drive Frequency 55 ± 5 KHz typ, at Ta=25 °C

(3) Initial Optical Characteristics

The unit shall satisfy the following criteria at 25 ± 2°C ambient temperature, 30% - 85% relative humidity, no air flow and with applying rating input voltage and input current by using DIYN 43 inverter, input voltage 12V, be measured 3 min. after initial power on.

Item		Min	Typ	Max	Unit	Note
LCM Average Brightness		120	140	--	cd/m ²	
Brightness Uniformity		85%	--	--	%	
Chromaticity	X	0.337	0.341	0.361		
	Y	0.382	0.402	0.422		


5 BLOCK DIAGRAM & POWER SUPPLY

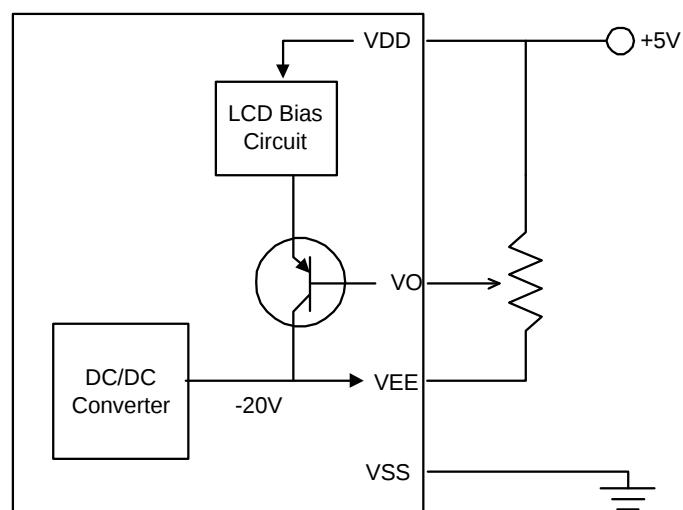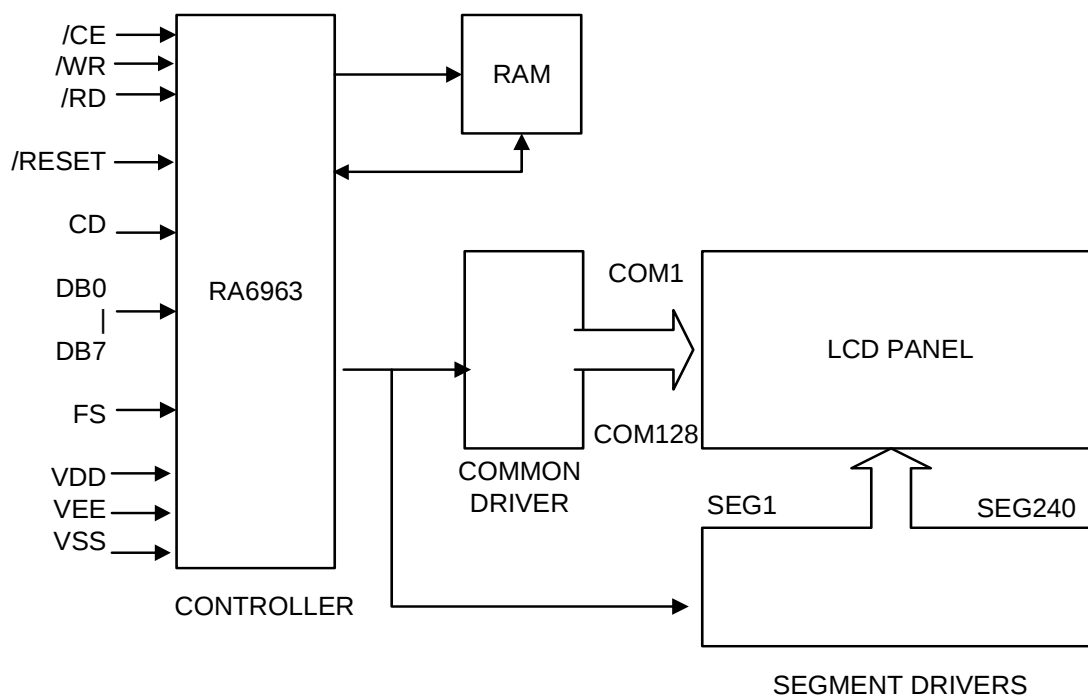

6 PIN CONNECTIONS



Pin No.	Symbol	Function
1	VSS	Ground (0V)
2	VDD	Logic Supply Voltage(+5V)
3	VO	LCD Power Supply
4	C/D	WR = L --- C/D = H : Command Write C/D = L : Data Write RD = L --- C/D = H : Status Read C/D = L : Data Read
5	/RD	Read data when RD = L
6	/WR	Write data when WR = L
7-14	DB0 - DB7	Data Bus Line
15	/CE	Chip Enable
16	/RES	H --- Normal L --- Initialize RA6963
17	VEE	Negative Power Supply (-20V)
18	MD2	Pin for selection of number of columns H – 32 columns L – 40 columns
19	FS	FS : Pin for selection of font H -- Font 6x8 (default) L -- Font 8x8
20	NC	No Connection

7 TIMING CHARACTERISTICS

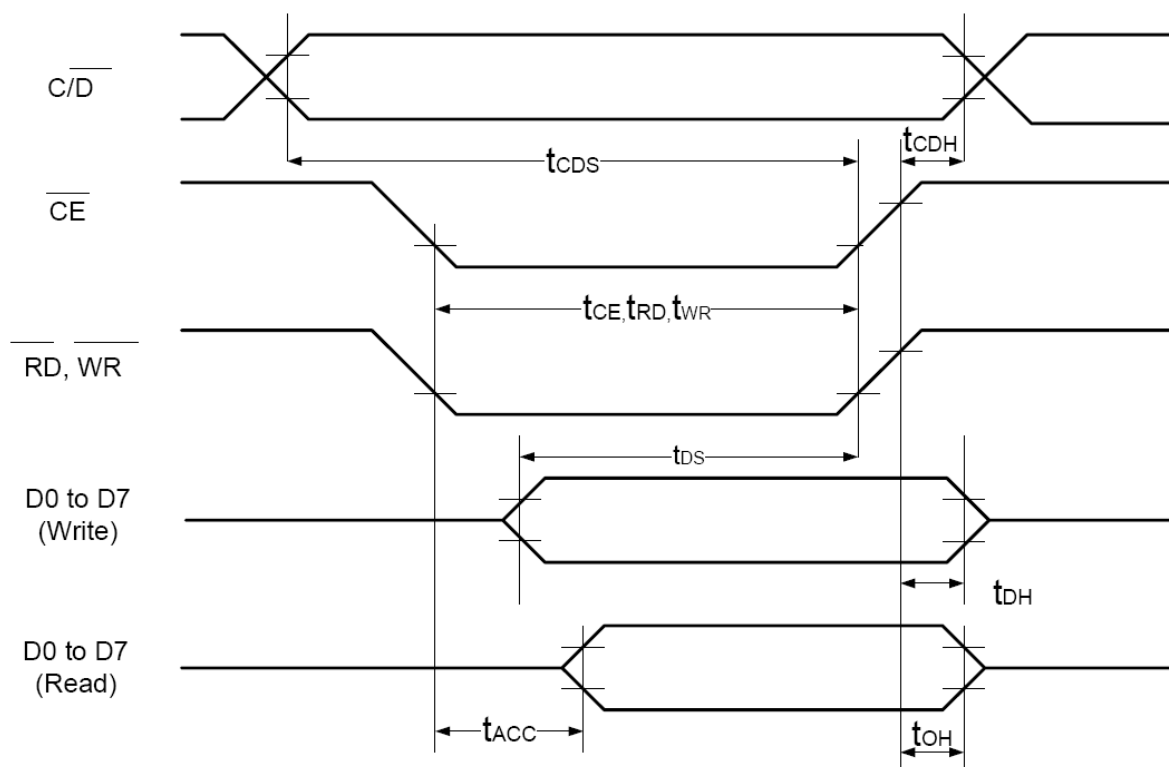

ITEM	SYMBOL	MIN	MAX	UNIT
C/D SET UP TIME	TCDS	100	--	ns
C/D HOLD TIME	THCL	10	--	ns
/CE,/RD,/WR PULSE WIDTH	TCE,TRD,TWR	80	--	ns
DATA SET UP TIME	TDS	80	--	ns
DATA HOLD TIME	TDH	40	--	ns
ACCESS TIME	TACC	--	150	ns
OUTPUT HOLD TIME	TOH	10	50	ns

7.1 Power ON/OFF Sequence

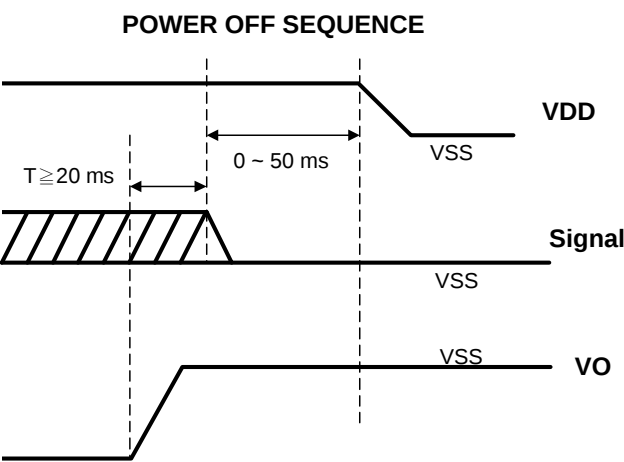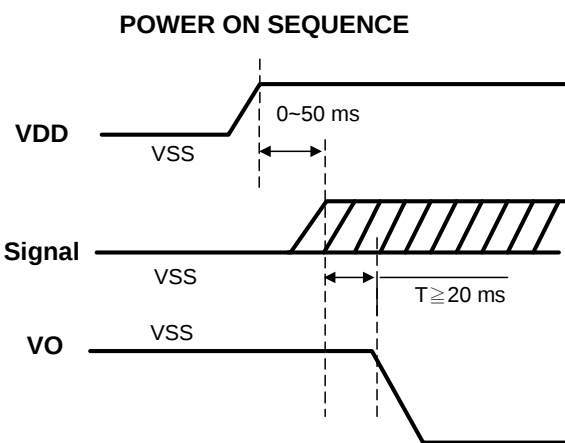

8 QUALITY AND RELIABILITY

8.1 TEST CONDITIONS

Tests should be conducted under the following conditions :

Ambient temperature : $25 \pm 5^{\circ}\text{C}$

Humidity : $60 \pm 25\% \text{ RH}$.

8.2 SAMPLING PLAN

Sampling method shall be in accordance with MIL-STD-105E , level II, normal single sampling plan .

8.3 ACCEPTABLE QUALITY LEVEL


A major defect is defined as one that could cause failure to or materially reduce the usability of the unit for its intended purpose. A minor defect is one that does not materially reduce the usability of the unit for its intended purpose or is an infringement from established standards and has no significant bearing on its effective use or operation.

8.4 APPEARANCE

An appearance test should be conducted by human sight at approximately 30 cm distance from the LCD module under fluorescent light. The inspection area of LCD panel shall be within the range of following limits.

8.5 INSPECTION QUALITY CRITERIA

Item	Description of defects			Class of Defects	Acceptable level (%)	
Function	Short circuit or Pattern cut			Major	0.65	
Dimension	Deviation from drawings			Major	1.5	
Black spots	Ave . dia . D	area A	area B	Minor	2.5	
	D≤0.2	Disregard				
	0.2<D≤0.3	3	4			
	0.3<D≤0.4	2	3			
	0.4<D	0	1			
Black lines	Width W, Length L		A	B	Minor	2.5
	W≤0.03		disregard			
	0.03<W≤0.05		3	4		
	0.05<W≤0.07 , L≤3.0		1	1		
	See line criteria					
Bubbles in polarizer	Average diameter D 0.2 < D < 0.5 mm for N = 4 , D > 0.5 for N = 1			Minor	2.5	
Color uniformity	Rainbow color or newton ring.			Minor	2.5	
Glass Scratches	Obvious visible damage.			Minor	2.5	
Contrast ratio	See note 1			Minor	2.5	
Response time	See note 2			Minor	2.5	
Viewing angle	See note 3			Minor	2.5	

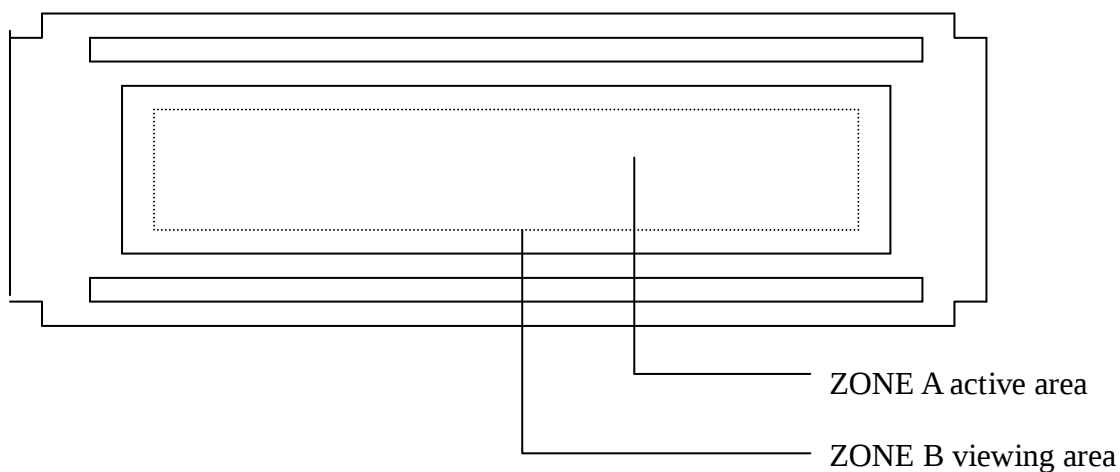

8.6 RELIABILITY

Test Item	Test Conditions	Note
	Normal Temp. type	
High Temperature Operation	50±3°C , t=96 hrs	
Low Temperature Operation	00±3°C , t=96 hrs	
High Temperature Storage	70±3°C , t=96 hrs	1,2
Low Temperature Storage	-20±3°C , t=96 hrs	1,2
Temperature Cycle	-20°C ~ 25°C ~ 70°C 30 m in. 5 min. 30 min. (1 cycle) Total 5 cycle	1,2
Humidity Test	40 °C, Humidity 90%, 96 hrs	1,2
Vibration Test (Packing)	Sweep frequency : 10 ~ 55 ~ 10 Hz/1min Amplitude : 0.75mm Test direction : X.Y.Z/3 axis Duration : 30min/each axis	2

Note 1 : Condensation of water is not permitted on the module.

Note 2 : The module should be inspected after 1 hour storage in normal conditions
(15-35°C , 45-65%RH).

Definitions of life end point :

- Current drain should be smaller than the specific value.
- Function of the module should be maintained.
- Appearance and display quality should not have degraded noticeably.
- Contrast ratio should be greater than 50% of the initial value.

9 HANDLING PRECAUTIONS

- (1) An LCD module is a fragile item and should not be subjected to strong mechanical shocks.
- (2) Avoid applying pressure to the module surface. This will distort the glass and cause a change in color.
- (3) Under no circumstances should the position of the bezel tabs or their shape be modified.
- (4) Do not modify the display PCB in either shape or positioning of components.
- (5) Do not modify or move location of the zebra or heat seal connectors.
- (6) The device should only be soldered to during interfacing. Modification to other areas of the board should not be carried out.
- (7) In the event of LCD breakage and resultant leakage of fluid do not inhale, ingest or make contact with the skin. If contact is made rinse immediately.
- (8) When cleaning the module use a soft damp cloth with a mild solvent, such as Isopropyl or Ethyl alcohol. The use of water, ketone or aromatic is not permitted.
- (9) Prior to initial power up input signals should not be applied.
- (10) Protect the module against static electricity and observe appropriate anti-static precautions.
- (11) AMIPRE will provide one year warranty for all products and three months warrantee for all repairing products.

10 OUTLINE DIMENSION

