




Bridge Rectifier MB2S MB4S MB6S MB8S MB10S

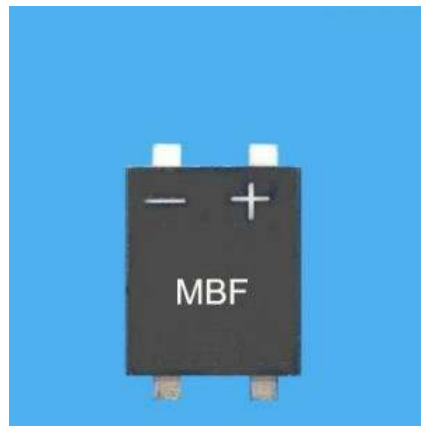

Specifications

0.5A Bridge Rectifier MB2S MB4S MB6S MB8S MB10S

Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%

Type Number	Symbol	MB2S	MB4S	MB6S	MB8S	MB10S	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	200	400	600	800	1000	V
Maximum Average Forward Rectified Current On glass-epoxy P.C.B. On aluminum substrate	$I_{(AV)}$	0.5			0.8		A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	35					A
Maximum Instantaneous Forward Voltage @ 0.4A	V_F	1.0					V
Maximum DC Reverse Current @ $T_A=25\text{ }^\circ\text{C}$ at Rated DC Blocking Voltage @ $T_A=125\text{ }^\circ\text{C}$	I_R	5.0			100		uA uA
Typical Junction Capacitance Per Leg	C_j	13					pF
Typical Thermal Resistance Per Leg	$R_{\theta JA}$	85					$^\circ\text{C/W}$
Operating Temperature Range	T_J	-55 to +150					$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 to +150					$^\circ\text{C}$