


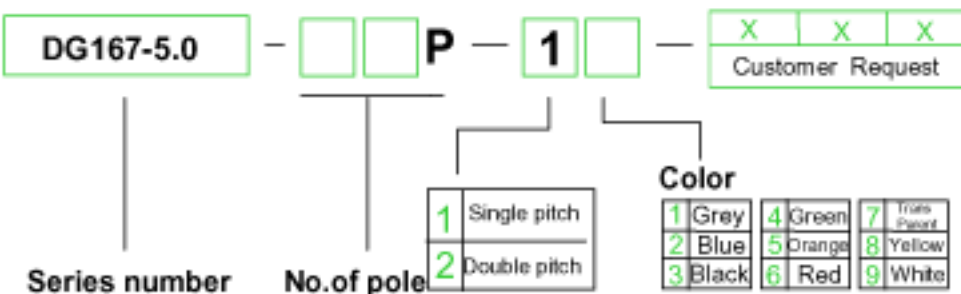

APPROVAL	UL	CE
Electrical		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	22A
Wire range	22-12AWG	0.5-2.5mm ²
Withstanding voltage	AC2000V/1Min	

Mechanical	
torque	0.4Nm(3.5Lb-In)
Ambient temperature	-40℃~+105℃
Strip length	6-7mm
Dimensions	
pitch	5.0mm(.197")
Poles	2P-12P

Material	
Housing	PA66,UL94V-0
Screws	M2.5,steel, Cr ³⁺ Znplated
Pin header	Brass,Tin plated
Wire guard	Phosphor bronze

HOW TO ORDER :



mm (INCH)	 DEGSON ELECTRONICS CO., LTD.
 TOLERANCE DEFINITION	NAME DG167-5.0