

EPA RETRACTABLE BELT BARRIER

The patented retractable belt barrier is designed for delimiting an EPA easily and safely. To avoid confusion of visitors when leaving the EPA, the belts are printed just on one side so the indication of EPA can only be seen from outside. To prevent the belt barrier from undercut, the system is also available with two belts.

The belts are printed bilingual: English and German.

Wall mounted retractable belt head

Stainless steel head, for wall mounting; includes a wall receiving end, yellow polyester belt with one side print.


Belt barrier post

Powder coated steel post, colour:	yellow
Plastic coated steel base colour:	black
Base diameter:	350mm
Post height	960mm
Weight:	12,5kg

Sign holder

Stainless steel frame for the belt barrier posts, it is used to locate a warning sign A4 paper.

7807.950	Wall mounting retractable belt head belt length 4m
7807.952	Belt barrier post, single belt belt length 4m
7807.954	Belt barrier post, dual belt belt length 2m
7807.956	Sign holder A4, for belt barrier post

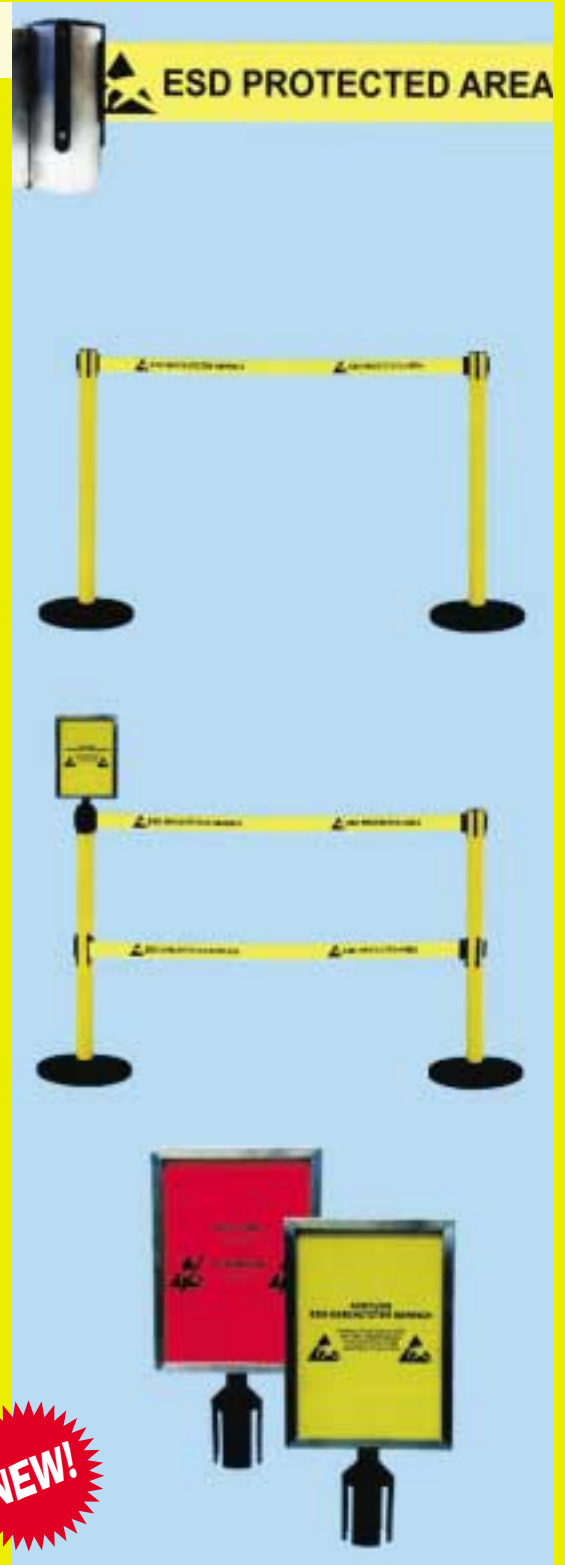

HIGH TEMPERATURE ADHESIVE TAPES

Polyimide adhesive tape ideal to protect contacts on the boards during the wave soldering, or other high temperature production processes.

Silicone adhesive protection without leaving a residue

Length	33m
Diameter	75mm
Thickness	0.06mm (2.3mil)
Temperature	260°C maximum

7807.185	HIGH TEMP. TAPE 6mm x 33m	7807.192	HIGH TEMP. TAPE ESD 6mm x 33m
7807.186	HIGH TEMP. TAPE 9mm x 33m	7807.193	HIGH TEMP. TAPE ESD 9mm x 33m
7807.187	HIGH TEMP. TAPE 12mm x 33m	7807.194	HIGH TEMP. TAPE ESD 12mm x 33m
7807.189	HIGH TEMP. TAPE 19mm x 33m	7807.196	HIGH TEMP. TAPE ESD 19mm x 33m
7807.190	HIGH TEMP. TAPE 25mm x 33m		