


## PLCC Series

**EMC 3030 1.5W 6V**

## Datasheet



Street Light



Flood Light



High Bay

**Introduction :**

EMC 3030 6V is a surface-mount LED which uses standard package dimension of 3.0 x 3.2 x 0.6mm, enabling drop-in replacement for existing 3030 packages. Besides, EMC package is heat-resistant and especially suitable for high power applications. 3030 6V Series comes in all ANSI CCTs and delivers the efficacy and reliability required for outdoor street light applications.

**Description :**

- Industry standard compatible 3.0mmx3.2mm package
- High voltage and high efficiency standard  
156lm/W @CRI70  
147lm/W @CRI80
- Wide viewing angle : 115°
- Enables 3, 5 step MacAdam ellipse kits
- CRI min. 70 (Typ. 72) & CRI min. 80
- Typ. Luminous flux :  
142 lm @ 5700K @CRI70  
136 lm @ 5700K @CRI80

**Feature and Benefits :**

- High luminous Intensity and high efficiency
- Based on Blue : InGaN technology
- Excellent performance and visibility
- Suitable for all SMT assembly methods
- IR reflow process compatible
- Environmental friendly; RoHS compliance
- ANSI Compliant color binning

## Table of Contents

---

General Information.....	3
Absolute Maximum Ratings (Ta=25°C).....	4
Characteristics .....	4
Electro - Optical Characteristics (Cool White).....	5
Luminous Flux Characteristic .....	6
Voltage Bin Structure .....	7
Mechanical Dimensions.....	8
Color BIN code.....	9
Characteristic curve.....	13
Reflow Profile .....	19
Reliability.....	20
Product Packaging information.....	21
Revision History .....	22
About Edison Opto.....	22

## General Information

### Ordering Code Format

2      T      1 2      0 2      x W      x x      0 0 0      x x x  
 X1      X2      X3-X4      X5-X6      X7-X8      X9-X10      X11-X13      X14-X16

X1		X2		X3-X4		X5-X6		X7-X8	
Type		Component		Series		Wattage		Color	
2	Emitter	T	PLCC	12	3030	02	2W	CW	Cool White
								NW	Neutral White
								WW	Warm White

X9-X10		X11-X13		X14-X16	
Internal code		PCB Board		Serial Number	
-	-	000	-	-	-

## Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Value	Units
Forward Current	$I_F$	200	mA
Pulse Forward Current (tp<=100μs, Duty cycle=0.25)	$I_{pulse}$	400	mA
Reverse Current	$I_R$	10	mA
Reverse Voltage	$V_R$	[2]	V
LED Junction Temperature	$T_J$	125	°C
Operating Temperature	-	-40 ~ +85	°C
Storage Temperature	-	-40 ~ +100	°C
ESD Sensitivity (HBM)	$V_B$	2,000	V
Soldering Temperature	$T_s$	Reflow Soldering : 255~260°C/10~30sec Manual Soldering : 350°C/3sec	

Notes:

1. Proper current derating must be observed to maintain junction temperature below the maximum at all time.
2. LEDs are not designed to be driven in reverse bias.

## Characteristics

Parameter	Symbol	Value	Units
Viewing Angle (Typ.)	$2\theta_{1/2}$	120	Degree
Thermal resistance	-	10	°C/W
CCT	(Cool White) (Neutral White) (Warm White)	6500	K
		5700	
		5000	
		4000	
		3500	
		3000	
		2700	
JEDEC Moisture Sensitivity	-	Level 2a <b>Floor Life</b> Conditions: ≤30°C / 60% RH <b>Soak Requirements(Standard)</b> Time (hours): 120+1/-0 Conditions: 60°C / 60% RH	

Notes:

1.  $2\theta_{1/2}$  is the off-axis angle where the luminous intensity is half of the axial luminous intensity.
2. Color Rendering index CRI tolerance: ±2.
3. CIE x/y tolerance: ±0.005

## Electro - Optical Characteristics (Cool White)

$I_f=150\text{mA}$  and  $T_j=25^\circ\text{C}$

### CRI70

$I_f$ (mA)	$V_f$ (V)	Power (W)	$I_m$	$I_m/W$
100	5.84	0.584	99.9	171
120	5.95	0.714	117.3	164
150 (Typ.)	6.06	0.909	142.1	156
200	6.29	1.258	180.5	143
250	6.53	1.633	213.1	131

### CRI80

$I_f$ (mA)	$V_f$ (V)	Power (W)	$I_m$	$I_m/W$
100	5.90	0.590	96.6	164
120	6.00	0.720	113.0	157
150 (Typ.)	6.17	0.926	136.5	147
200	6.36	1.272	172.2	135
250	6.59	1.648	204.5	124

Note:  
LM Values are for representative reference only.

## Luminous Flux Characteristic

Luminous Flux Characteristics,  $I_f=150\text{mA}$  and  $T_j=25^\circ\text{C}$

Color	CRI	Group	Min. Luminous flux (lm)	Max. Luminous flux (lm)	Forward Current (mA)	Order Code			
Cool White	70	V2	120	130	150	2T1202CW05000002			
		V3	130	140					
		V4	140	150					
		V5	150	160					
Neutral White	70	V2	120	130		150	2T1202NW05000002		
		V3	130	140					
		V4	140	150					
		V5	150	160					
Warm White	70	V1	110	120			150	2T1202WW05000002	
		V2	120	130					
		V3	130	140					
		V4	140	150					
Cool White	80	V2	120	130				150	2T1202CW11000001
		V3	130	140					
		V4	140	150					
		V5	150	160					
Neutral White	80	V2	120	130	150				2T1202NW11000001
		V3	130	140					
		V4	140	150					
		V5	150	160					
Warm White	80	V1	110	120		150			2T1202WW11000001
		V2	120	130					
		V3	130	140					
		V4	140	150					

**Note:**


The luminous flux performance is guaranteed within published operating conditions. Edison Opto maintains a tolerance of  $\pm 10\%$  on flux measurements.

## Voltage Bin Structure


Group	Min. Voltage (V)	Max. Voltage (V)
U54	5.4	5.6
U56	5.6	5.8
U58	5.8	6.0
U60	6.0	6.2
U62	6.2	6.4
U64	6.4	6.6
U66	6.6	6.8
U68	6.8	7.0

Note:  
Forward voltage measurement allowance is  $\pm 0.06V$ .

## Mechanical Dimensions

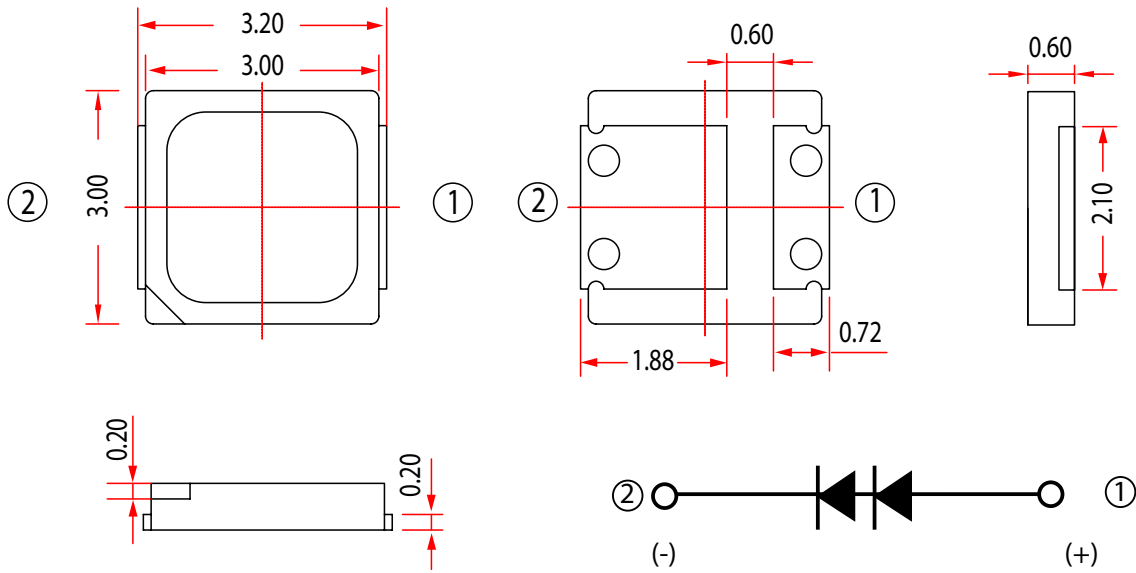

### Solder Pad

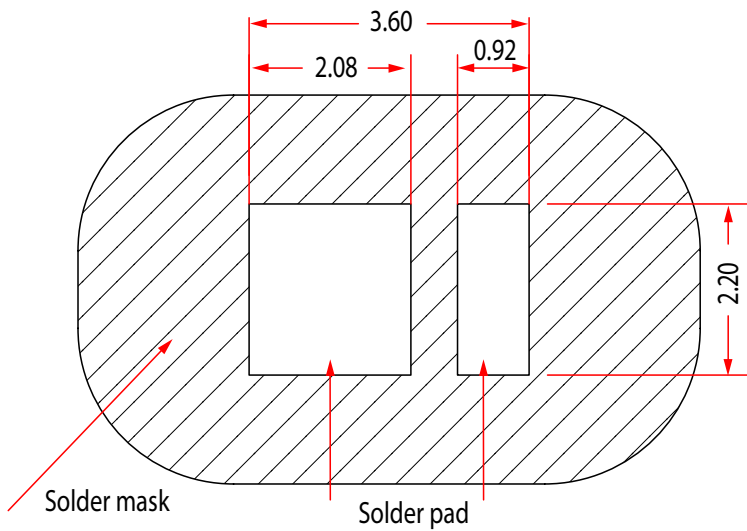

**Notes:**

1. All dimensions are measured in mm.
2. Tolerance :  $\pm 0.20$  mm



## Color BIN code

Color region stay within Macadam "3-Step/5-step" ellipse from the chromaticity center.


The chromaticity center refers to ANSI C78.377:2008.

Please refer to ANSI C78.377 for the chromaticity center.


CCT	Steps	Cx	Cy	a	b	theta
2700K	5	0.4578	0.4101	0.01350	0.00700	53.70
3000K	5	0.4338	0.4030	0.01390	0.00680	53.22
3500K	5	0.4073	0.3917	0.01545	0.00690	54.00
4000K	5	0.3818	0.3797	0.01565	0.00670	53.72
5000K	5	0.3447	0.3553	0.01370	0.00590	59.62
5700K	5	0.3287	0.3417	0.01243	0.00533	59.09
6500K	5	0.3123	0.3282	0.01115	0.00475	58.57

CCT	Steps	Cx	Cy	a	b	theta
2700K	3	0.4578	0.4101	0.00810	0.00420	53.70
3000K	3	0.4338	0.4030	0.00834	0.00408	53.22
3500K	3	0.4073	0.3917	0.00927	0.00414	54.00
4000K	3	0.3818	0.3797	0.00939	0.00402	53.72
5000K	3	0.3447	0.3553	0.00822	0.00354	59.62
5700K	3	0.3287	0.3417	0.00746	0.00320	59.09
6500K	3	0.3123	0.3282	0.00669	0.00285	58.57


## Cool White

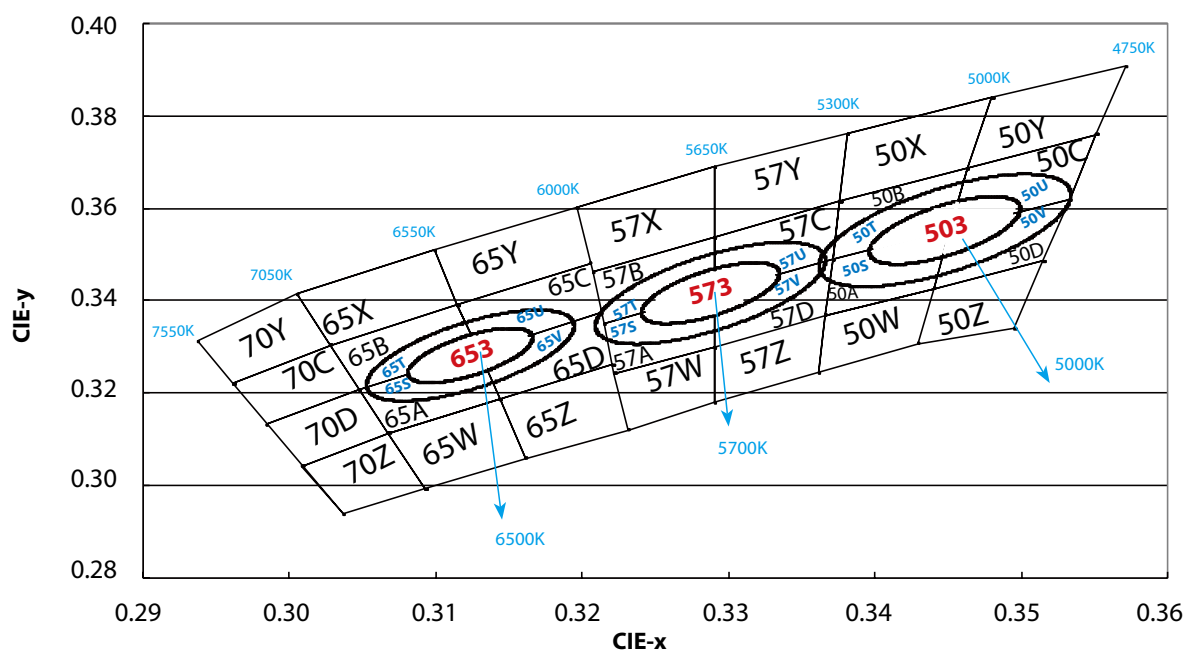

### Neutral White

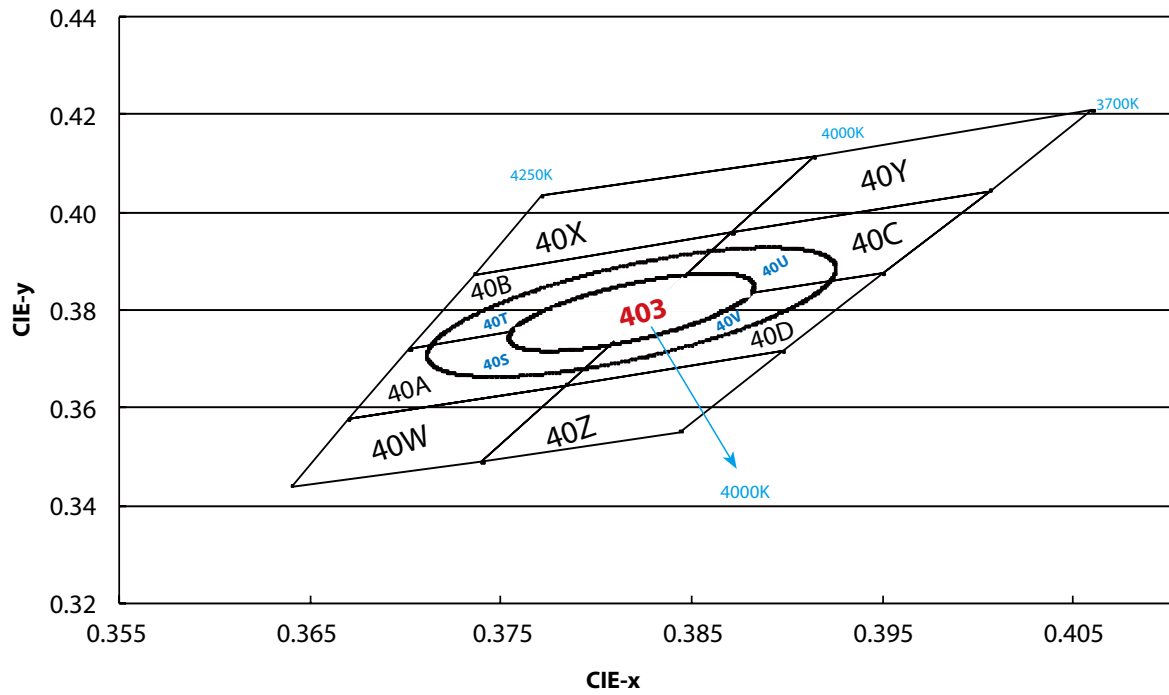

### Warm White

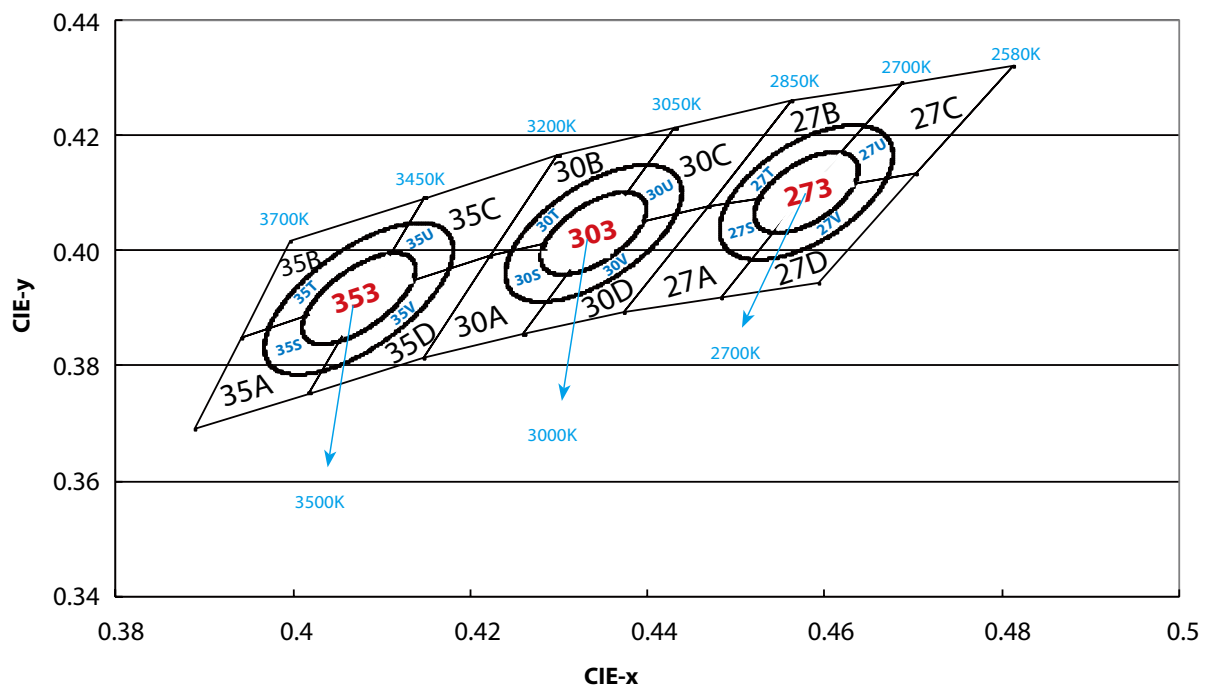

### 6500K

65X		65B		65A		65W	
X	Y	X	Y	X	Y	X	Y
0.3005	0.3415	0.3115	0.3391	0.3130	0.3290	0.3068	0.3113
0.3099	0.3509	0.3028	0.3304	0.3048	0.3207	0.3144	0.3186
0.3115	0.3391	0.3048	0.3207	0.3068	0.3113	0.3161	0.3059
0.3028	0.3304	0.3130	0.3290	0.3144	0.3186	0.3093	0.2993

65Y		65C		65D		65Z	
X	Y	X	Y	X	Y	X	Y
0.3099	0.3509	0.3205	0.3481	0.3213	0.3373	0.3144	0.3186
0.3196	0.3602	0.3115	0.3391	0.3130	0.3290	0.3221	0.3261
0.3205	0.3481	0.3130	0.3290	0.3144	0.3186	0.3231	0.3120
0.3115	0.3391	0.3213	0.3373	0.3221	0.3261	0.3161	0.3059

### 5700K

57X		57B		57A		57W	
X	Y	X	Y	X	Y	X	Y
0.3196	0.3602	0.3290	0.3538	0.3290	0.3417	0.3222	0.3243
0.3290	0.3690	0.3207	0.3462	0.3215	0.3350	0.3290	0.3300
0.3290	0.3538	0.3215	0.3350	0.3222	0.3243	0.3290	0.3180
0.3207	0.3462	0.3290	0.3417	0.3290	0.3300	0.3231	0.3120

57Y		57C		57D		57Z	
X	Y	X	Y	X	Y	X	Y
0.3290	0.3690	0.3376	0.3616	0.3371	0.3490	0.3290	0.3300
0.3381	0.3762	0.3290	0.3538	0.3290	0.3417	0.3366	0.3369
0.3376	0.3616	0.3290	0.3417	0.3290	0.3300	0.3361	0.3245
0.3290	0.3538	0.3371	0.3490	0.3366	0.3369	0.3290	0.3180

### 5000K

50X		50B		50A		50W	
X	Y	X	Y	X	Y	X	Y
0.3381	0.3762	0.3463	0.3687	0.3451	0.3554	0.3366	0.3369
0.3480	0.3840	0.3376	0.3616	0.3371	0.3490	0.3440	0.3427
0.3463	0.3687	0.3371	0.3490	0.3366	0.3369	0.3429	0.3307
0.3376	0.3616	0.3451	0.3554	0.3440	0.3427	0.3361	0.3245

50Y		50C		50D		50Z	
X	Y	X	Y	X	Y	X	Y
0.3480	0.3840	0.3551	0.3760	0.3533	0.3620	0.3440	0.3427
0.3571	0.3907	0.3463	0.3687	0.3451	0.3554	0.3515	0.3487
0.3551	0.3760	0.3451	0.3554	0.3440	0.3427	0.3495	0.3339
0.3463	0.3687	0.3533	0.3620	0.3515	0.3487	0.3429	0.3307

### 4000K

40X		40B		40A		40W	
X	Y	X	Y	X	Y	X	Y
0.3771	0.4034	0.3871	0.3959	0.3828	0.3803	0.3670	0.3578
0.3736	0.3874	0.3736	0.3874	0.3702	0.3722	0.3640	0.3440
0.3871	0.3959	0.3702	0.3722	0.3670	0.3578	0.3740	0.3491
0.3914	0.4115	0.3828	0.3803	0.3784	0.3647	0.3784	0.3647

40Y		40C		40D		40Z	
X	Y	X	Y	X	Y	X	Y
0.3914	0.4115	0.4006	0.4044	0.3950	0.3875	0.3784	0.3647
0.3871	0.3959	0.3871	0.3959	0.3828	0.3803	0.3740	0.3491
0.4006	0.4044	0.3828	0.3803	0.3784	0.3647	0.3844	0.3552
0.4060	0.4208	0.3950	0.3875	0.3898	0.3716	0.3898	0.3716

### 3500K

35A		35B		35C		35D	
X	Y	X	Y	X	Y	X	Y
0.4083	0.3921	0.4148	0.4090	0.4299	0.4165	0.4223	0.399
0.3941	0.3848	0.3996	0.4015	0.4148	0.4090	0.4083	0.3921
0.3889	0.3690	0.3941	0.3848	0.4083	0.3921	0.4018	0.3752
0.4018	0.3752	0.4083	0.3921	0.4223	0.399	0.4147	0.3814

### 3000K


30A		30B		30C		30D	
X	Y	X	Y	X	Y	X	Y
0.4345	0.4033	0.4431	0.4213	0.4562	0.4260	0.4468	0.4077
0.4223	0.3990	0.4299	0.4165	0.4431	0.4213	0.4345	0.4033
0.4147	0.3814	0.4223	0.3990	0.4345	0.4033	0.4260	0.3854
0.4260	0.3854	0.4345	0.4033	0.4468	0.4077	0.4373	0.3893

### 2700K


27A		27B		27C		27D	
X	Y	X	Y	X	Y	X	Y
0.4578	0.4101	0.4687	0.4289	0.4813	0.4319	0.4703	0.4132
0.4468	0.4077	0.4562	0.4260	0.4687	0.4289	0.4578	0.4101
0.4373	0.3893	0.4468	0.4077	0.4578	0.4101	0.4483	0.3919
0.4483	0.3919	0.4578	0.4101	0.4703	0.4132	0.4593	0.3944

## Characteristic curve


### Color Spectrum (CRI70)

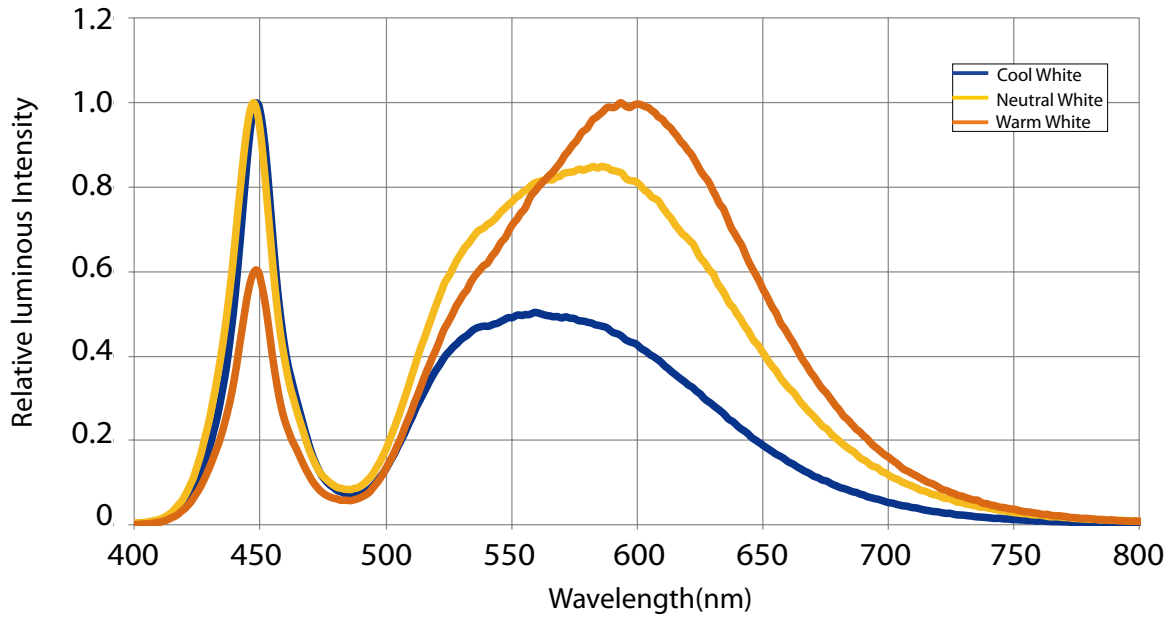


### Color Spectrum (CRI80)

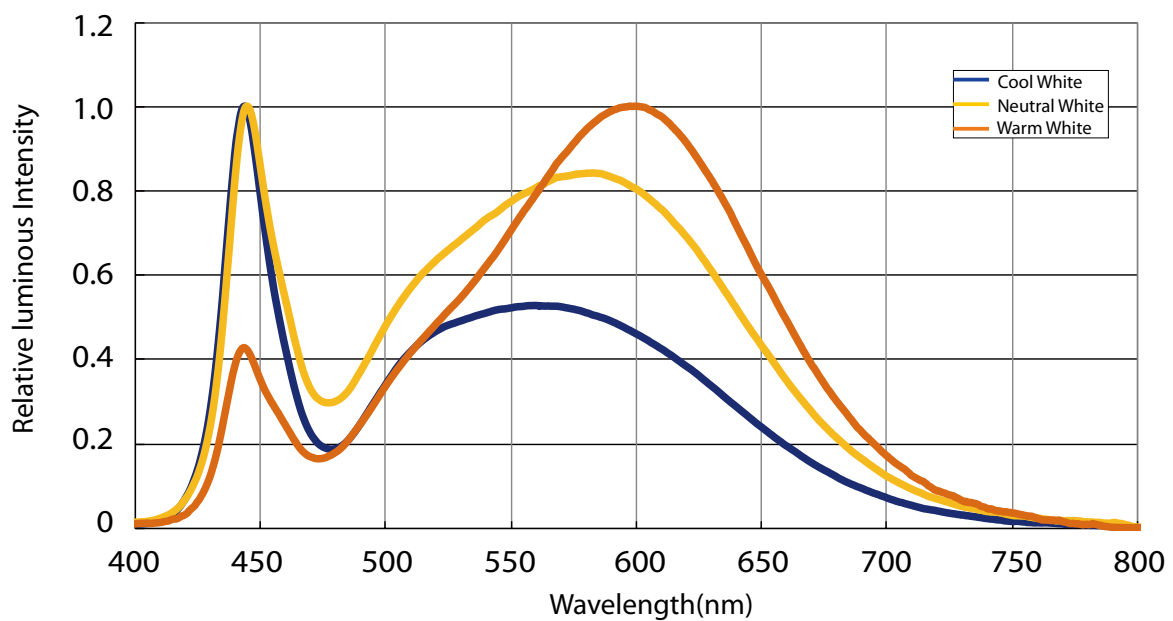


**Beam Pattern**

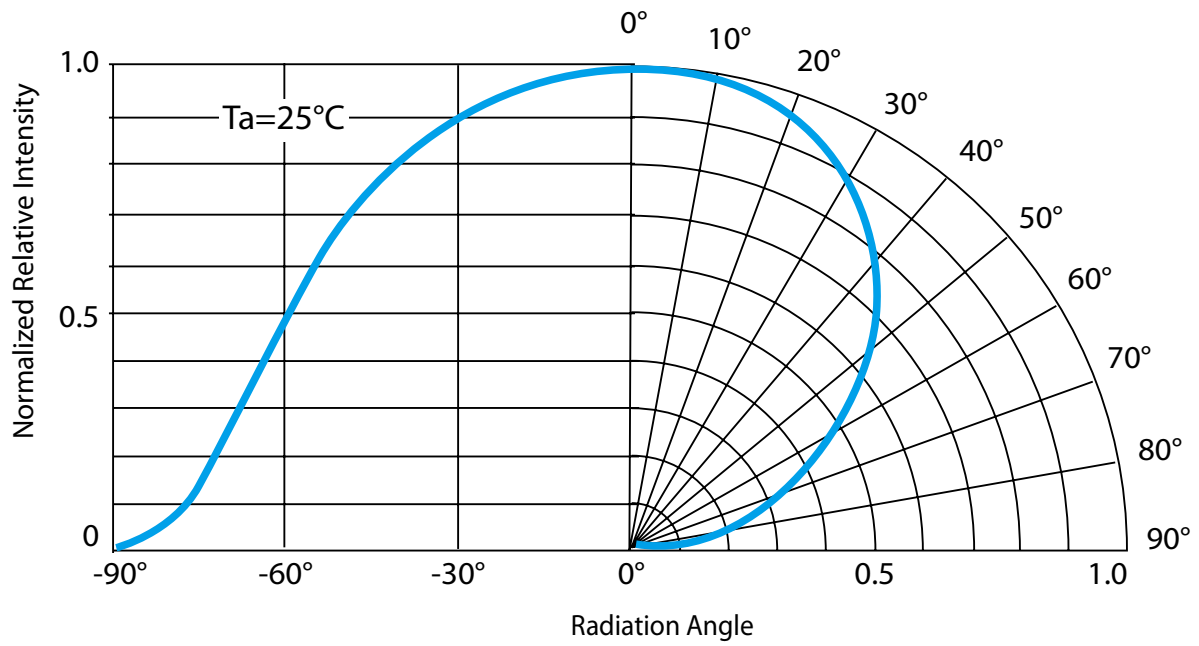


### Forward Current vs. Forward Voltage

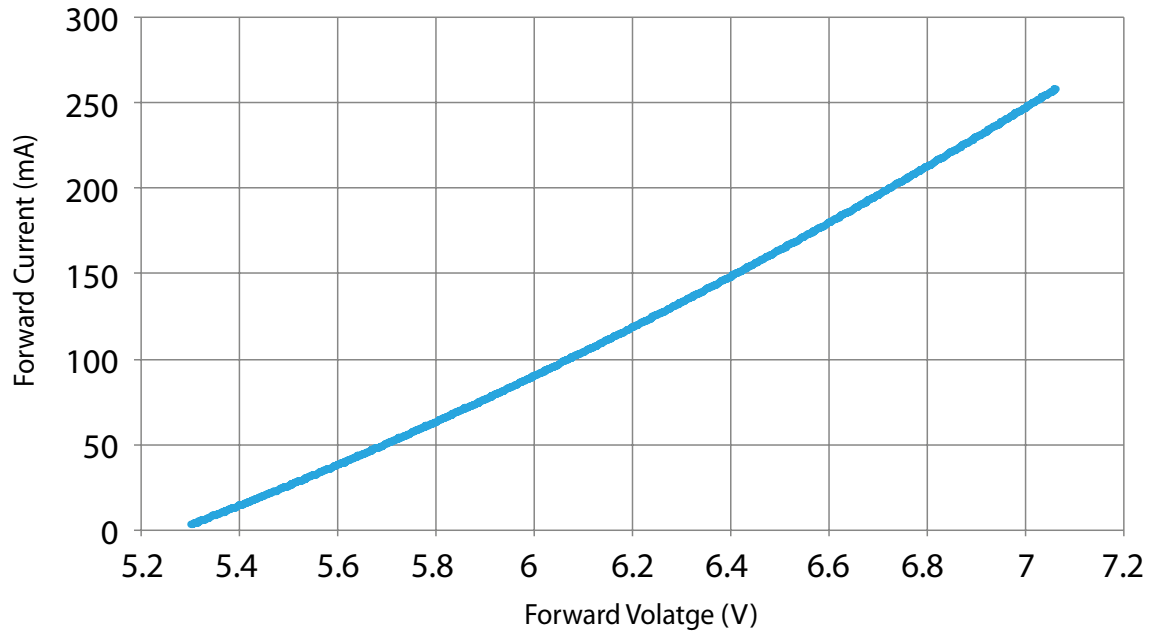


### Relative Luminous Intensity vs. Forward Current

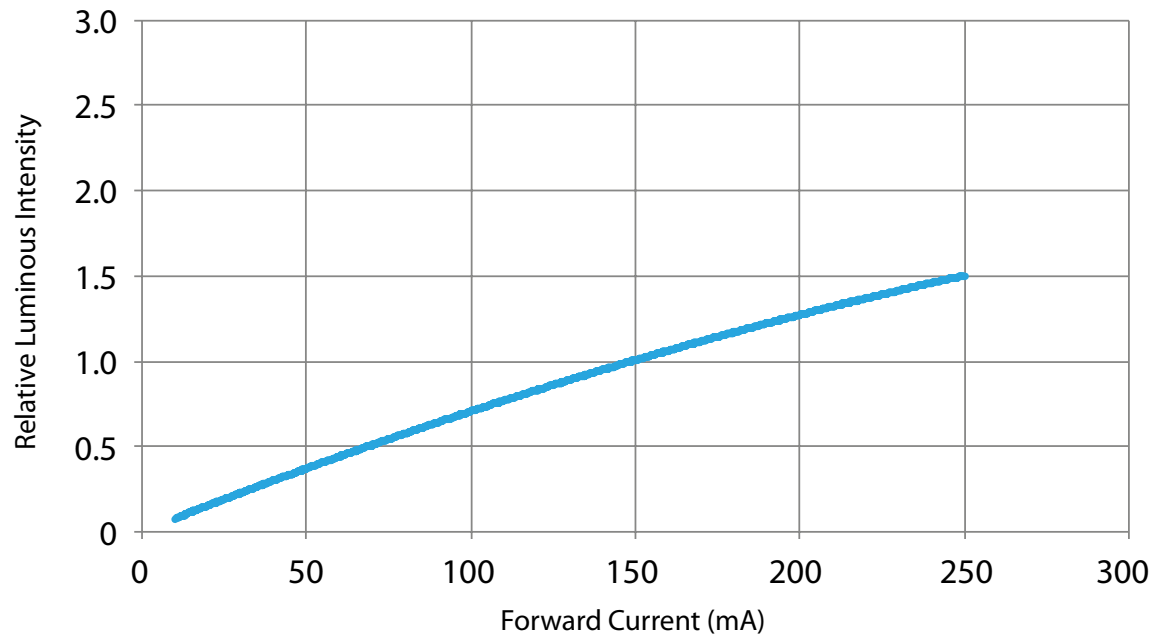

### Relative Luminous intensity vs. Junction Temperature

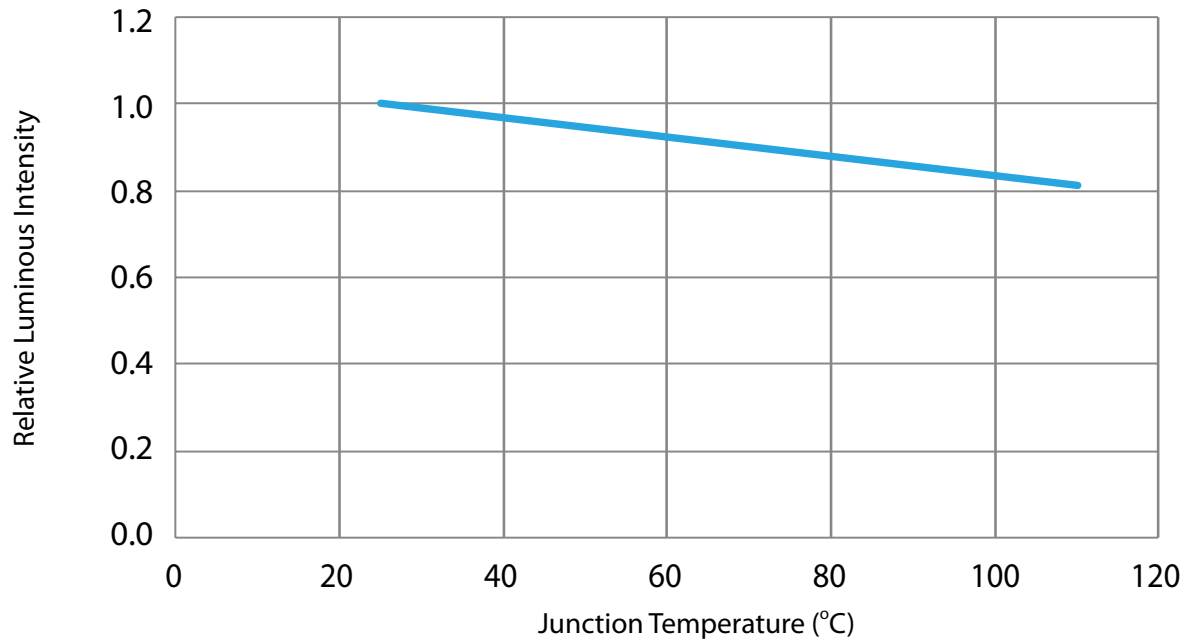


### Forward Voltage vs. Junction Temperature

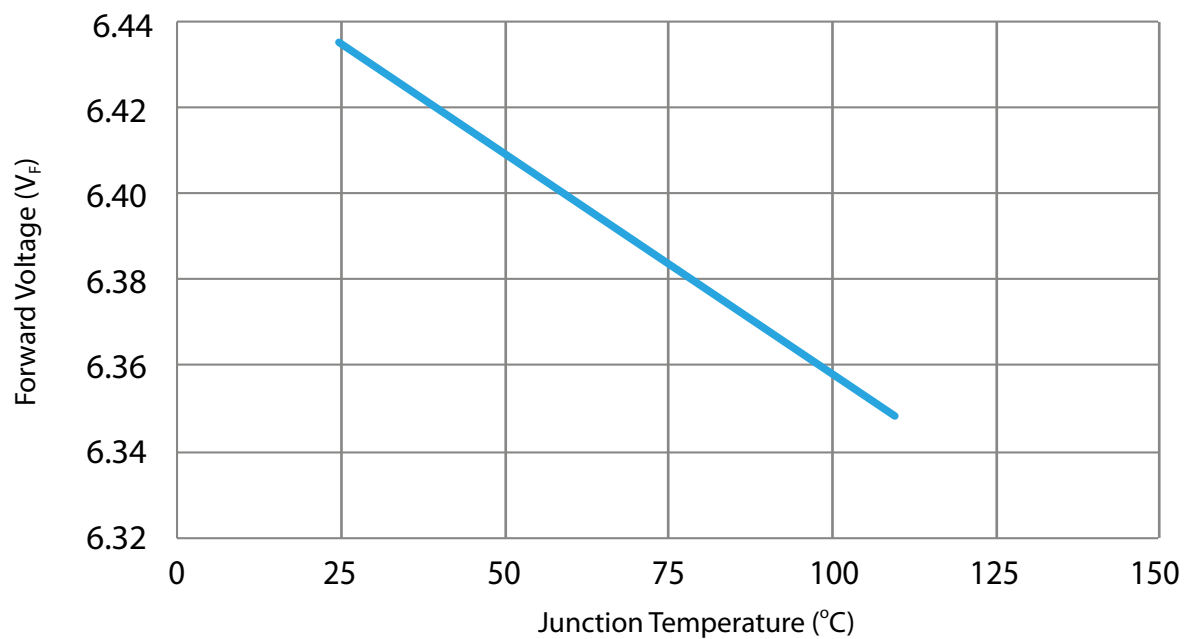





### $\Delta x, \Delta y$ vs. Forward Current

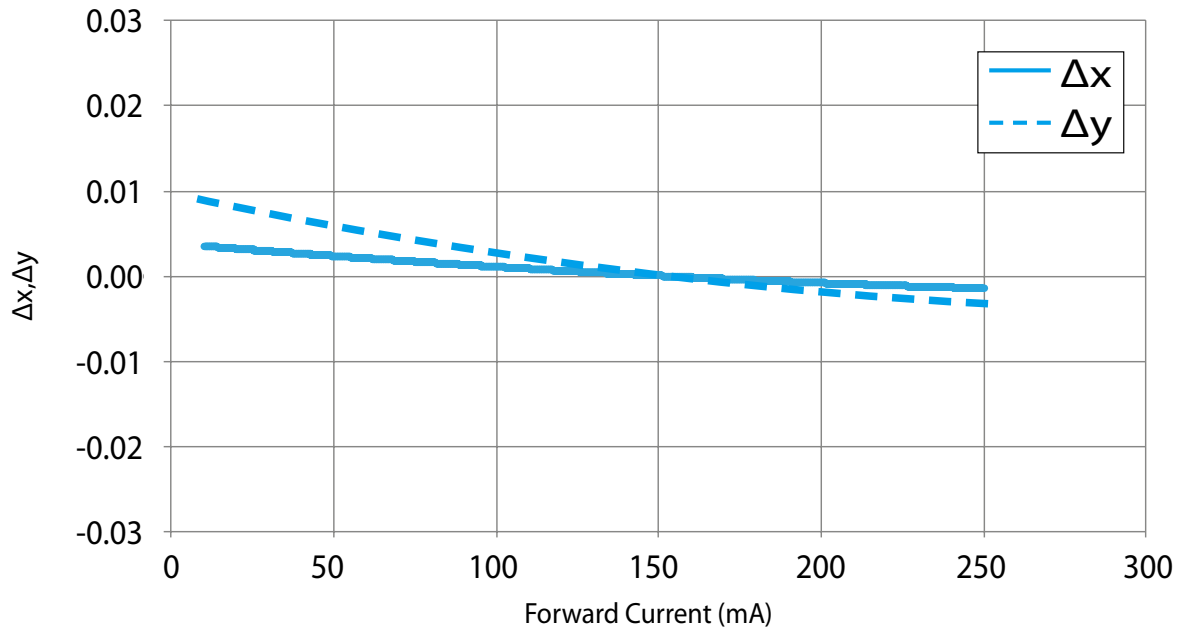

### $\Delta x, \Delta y$ vs. Junction Temperature

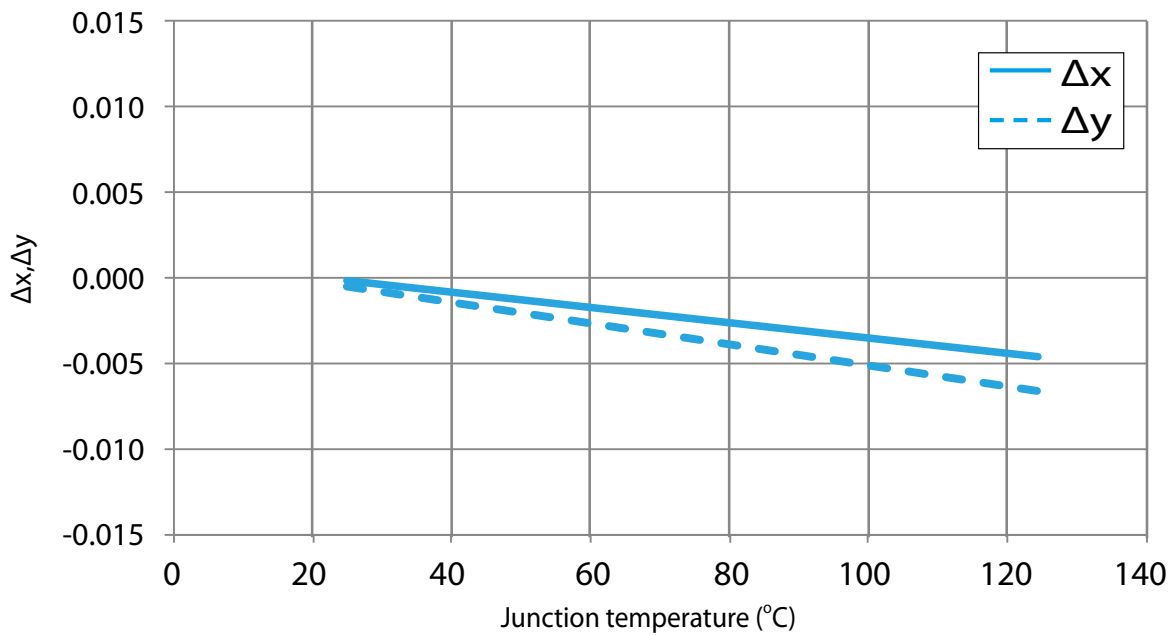


### Maximum Current vs. Solder Pad Temperature

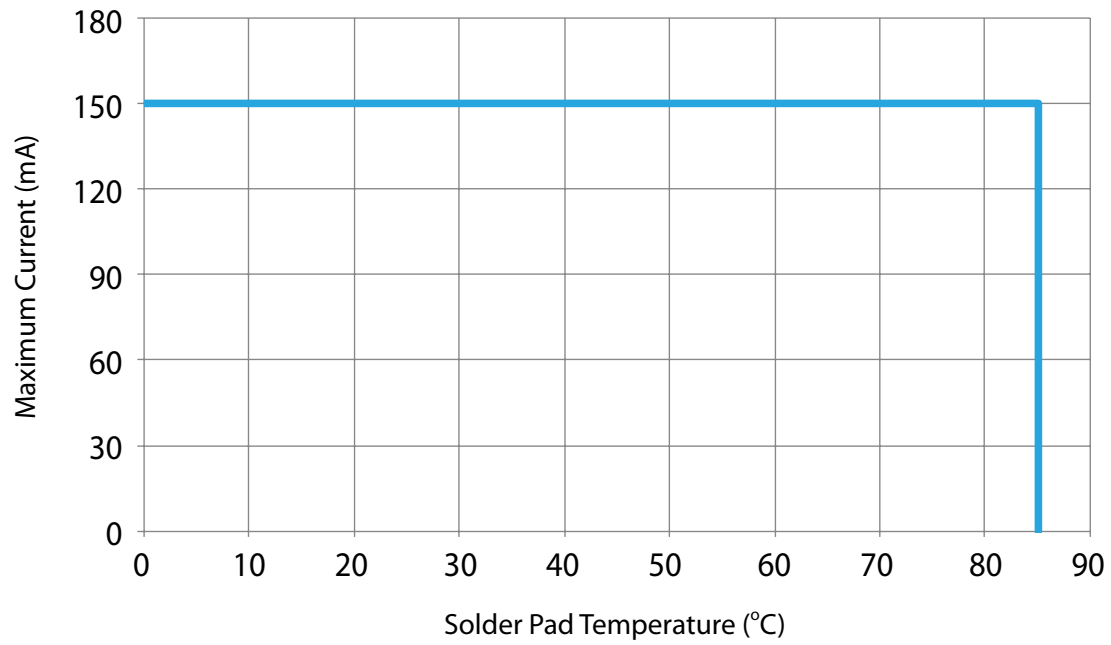

## Reflow Profile

The following reflow profile is from IPC/JEDEC J-STD-020D which provided here for reference.

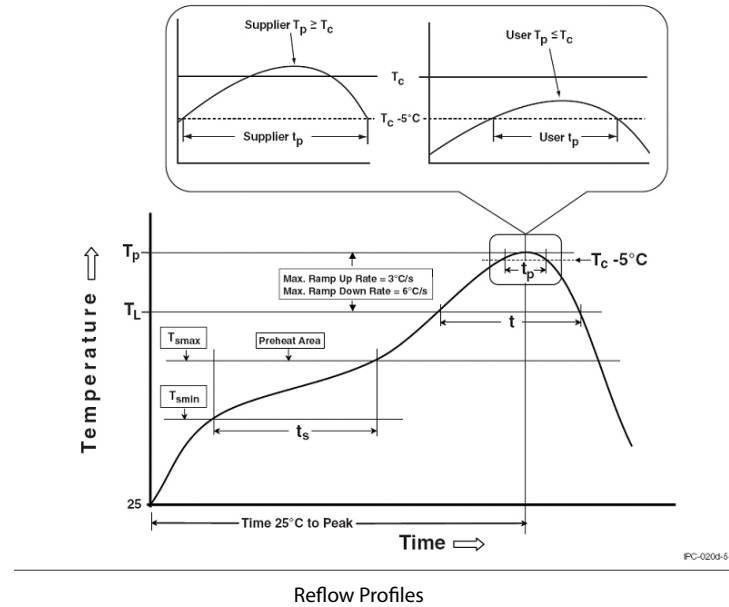

## Classification Reflow Profiles

Profile Feature	Pb-Free Assembly
Preheat & Soak Temperature min ( $T_{smin}$ ) Temperature max ( $T_{smax}$ ) Time ( $T_{smin}$ to $T_{smax}$ ) ( $t_s$ )	150 °C 200 °C 60-120 seconds
Average ramp-up rate ( $T_{smax}$ to $T_p$ )	3 °C/second max.
Liquidous temperature ( $T_l$ ) Time at liquidous ( $t_l$ )	217 °C 60-150 seconds
Peak package body temperature ( $T_p$ )*	255 °C ~260 °C *
Classification temperature ( $T_c$ )	260 °C
Time ( $t_p$ )** within 5 °C of the specified classification temperature ( $T_c$ )	30** seconds
Average ramp-down rate ( $T_p$ to $T_{smax}$ )	6°C/second max.
Time 25°C to peak temperature	8 minutes max.

Notes:

- \* Tolerance for peak profile temperature ( $T_p$ ) is defined as a supplier minimum and a user maximum.
- \*\* Tolerance for time at peak profile temperature ( $t_p$ ) is defined as a supplier minimum and a user maximum.


## Reliability

NO.	Test Item	Test Condition	Remark
1	Temperature Cycle	-40°C~100°C 30, 30, mins	100 Cycle
2	Thermal Shock	-40°C~100°C 15, 15 mins $\leq$ 10 sec	100 Cycle
3	Resistance to Soldering Heat	T <sub>SOL</sub> =260°C, 30 sec	3 times
4	Moisture Resistance	25°C~65°C 90% RH 24 hrs / 1 cycle	10 Cycle
5	High-Temperature Storage	T <sub>A</sub> =100°C	1,000 hrs
6	Low-Temperature Storage	T <sub>A</sub> =-40°C	1,000 hrs
7	Operation Life test	25°C	1,000 hrs
8	High Temperature Operation Life test	85°C	1,000 hrs
9	High Humidity Heat Life Test	60°C, 90%RH	1,000 hrs
10	ON/OFF Test	30 sec ON, 30 sec OFF	1.5W times


## Failure Criteria

Item	Criteria for Judgment	
	Min.	Max.
Lumen Maintenance	85%	-
$\Delta u'v'$	-	0.006
Forward Voltage	-	Initial Data x 1.1
Reverse Current	-	10 $\mu$ A
Resistance to Soldering Heat	No dead lamps or visual damage	

## Product Packaging information

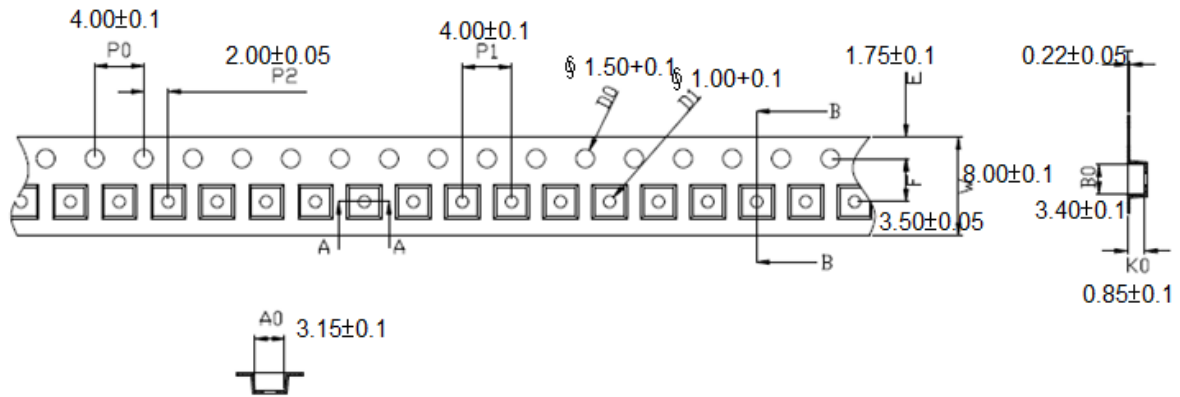

## Reel Specification

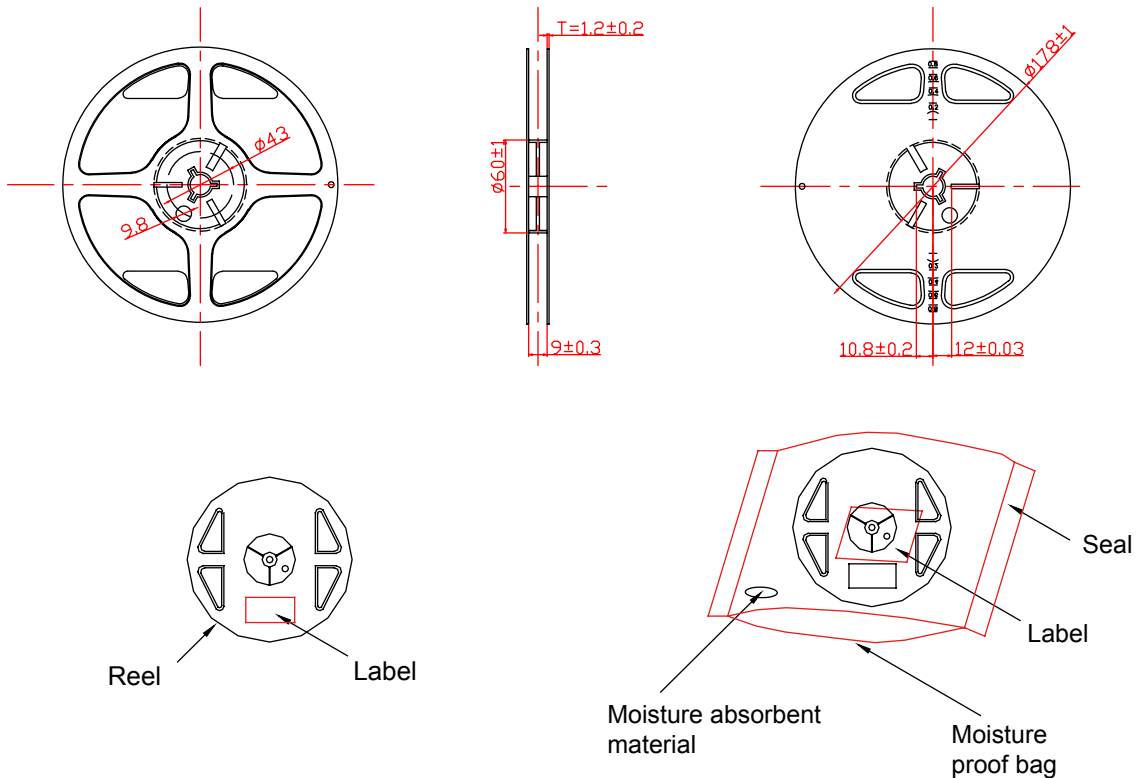

Item	Quantity	Total	Dimensions(mm)
Reel	4,000pcs	4,000pcs	R=178
Starting with 150pcs empty, and 150pcs empty at the last			

## Revision History

Versions	Description	Release Date
1	Establish a Datasheet	2015/07/02
2	1. Update introduction 2. Revise mechanical dimensions 3. Update Luminous flux characteristic 4. Update Voltage Bin structure	2015/12/03
3	1. Add CRI80 Information 2. Revise Package information	2016/05/24
4	Delete HE Information	2016/09/30

## About Edison Opto

Edison Opto is a leading manufacturer of high power LED and a solution provider experienced in LDMS. LDMS is an integrated program derived from the four essential technologies in LED lighting applications- Thermal Management, Electrical Scheme, Mechanical Refinement, Optical Optimization, to provide customer with various LED components and modules. More Information about the company and our products can be found at [www.edison-opto.com](http://www.edison-opto.com)

Copyright©2016 Edison Opto. All rights reserved. No part of publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photo copy, recording or any other information storage and retrieval system, without prior permission in writing from the publisher. The information in this publication are subject to change without notice.

[www.edison-opto.com](http://www.edison-opto.com)

For general assistance please contact:  
[service@edison-opto.com.tw](mailto:service@edison-opto.com.tw)

For technical assistance please contact:  
[LED.Detective@edison-opto.com.tw](mailto:LED.Detective@edison-opto.com.tw)