



Rating	10A 125V, 6A 250VAC	CQC	UL	Mounting Hole	Circuit Diagram	
	16A 125V, 10A 250VAC	T85				
	6(3)A 250VAC	10E3	10			
	10(4)A 250VAC					
Contact Resistance	50m ohm Max.					
Insulation Resistance	DC 500V 100M ohm Min.					
Dielectric Strength	AC 1500V 1 minute					
Operation Temperature	-25°C~85°C			Thickness	X	Y
				0.75...1.25	19.4-0.1	22.2+0.1
Switch Function	4P DPST ON-OFF (NEON dependent)			1.25...2	19.6-0.1	22.2+0.1
				2...3	20.2-0.1	22.2+0.1



MATERIAL:
 Frame: Nylon#66, Black
 Actuator: PC, Red Clear
 Printed: White, hot stamping

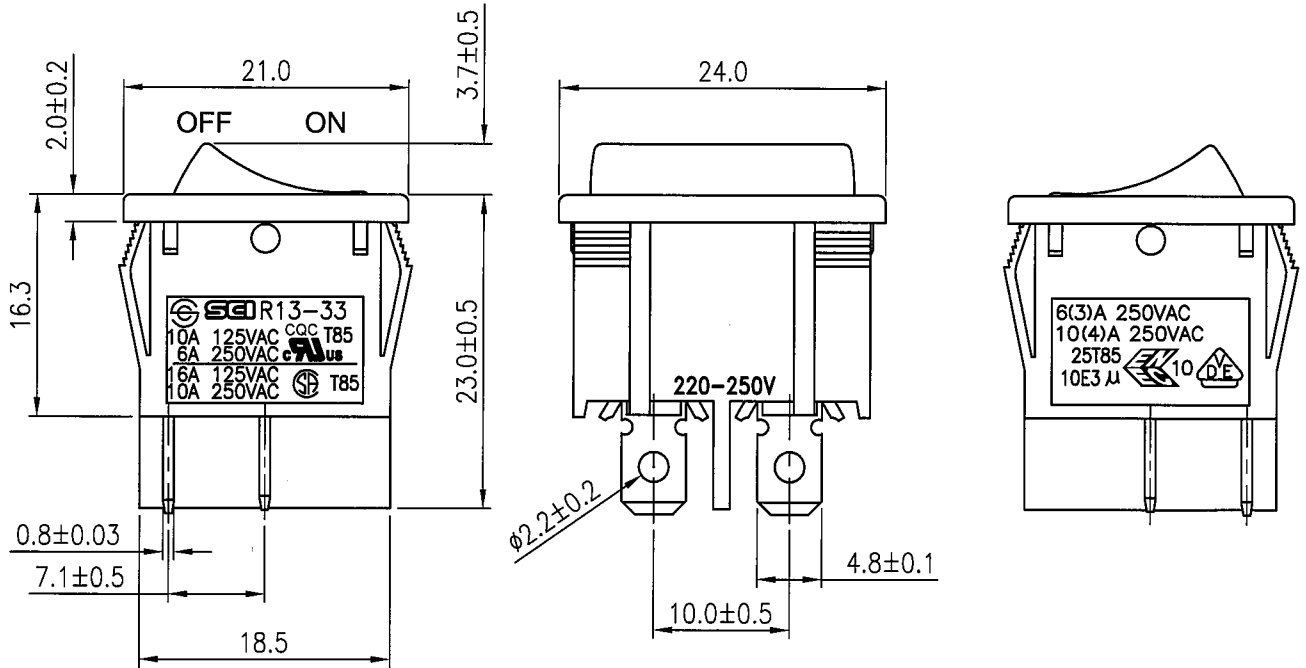

1、Tolerances ±0.3 Unless Otherwise Specified

						△
						△
Date	Name	Description				No.
Drawn	Checked	Approved	SCI BOM No.	1822145	Model Name	TOGGLE SWITCH
林玥呈		王伯山	Customer No.		Model No.	R13-33B-02
09/30/17		9/30/17	Unit	mm	Shin Chin Industrial Co., Ltd.	Rev. 0