

REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

- NOTES1:
- UL Standard
1. Rated voltage/current : 600V / 12A
 2. Withstanding voltage : AC2200V/Min.
 3. Torque value : M3 , 4.43lb.in
 4. Wire range : 26~10AWG

IEC Standard


1. Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(kV)	8.0kV
Rate Voltage(V)	800V
Rate Current(A)	6.3A

2. Torque value : M3 , 0.5N·m
3. Wire range : 0.2~4mm²

- NOTES2:
1. Dimension shall be interpreted per ASME Y14.5-2009
 2. Pitch : 8.20mm, Poles : N=01P
 3. Stripping length : 8~9mm
 4. Operating temperature : -40°C~+105°C
 5. Undimensioned tolerances:

Pitch range in mm	Nominal dimension range		mm	D
	Over	Under		
6 TO 10	6	10	0.1/10	
10 TO 24	10	24		
30 TO 60	30	60	100/150	
60 TO 100	60	100	150	
100 TO 150	100	150	±2'	
±0.15 ±0.20 ±0.30 ±0.30 ±0.50 ±0.70 ±1.00 ±1.30				

6. RoHS Compliance

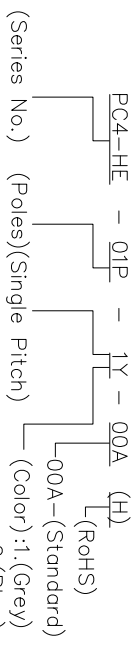

- 1.(Grey)
- 2.(Blue)
- 3.(Black)
- 4.(Green)
- 5.(Orange)
- 6.(Red)
- 7.(Transparent)
- 8.(Yellow)
- 9.(White)

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD:	/	TITLE:	CUSTOMER DRAWING
CHKD:	/	DRAWING NO.:	/
DRFT:	/	REV	DO
THIRD ANGLE PROJECTION		SHEET	1/1
		SCALE	1:1