



Straight female headers 2,54 mm pitch and precision turned contacts. Standard versions with a height of 7,00 or 8,50 mm available.

Double row version.

Pitch (mm)	2,54
Mating pin size (range)	∅ 0,70-0,90, sq. 0,64
No of contacts	4, 6, 8, 10, 12, ... 100
Polarising	No
Locking	No
Contact type	A8 - Standard 7

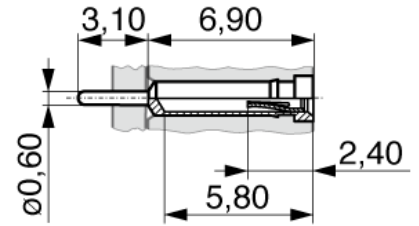

Clip style	6 finger clip
Material contact	Copper alloy
Material clip	Beryllium copper
Plating contact	Sn
Plating clip	Au, Au 0,75 μ
Material insulator	High temp. thermoplast UL94V-0
Rated current	3,0 A
Rated voltage	150 V _{RMS} / V _{DC}
Withstand voltage	500 V _{RMS} / V _{DC}
Operating temperature	-55°C to +125°C
Max. processing temper.	260°C for 10 seconds
Packaging	Standard

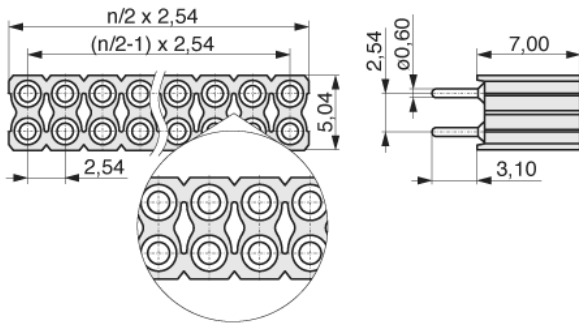

PCB layout

