



Ø 4 MM SYSTEM

Ø 4 mm Test Leads

Test Lead LK4-B

Highly flexible, with stackable Ø 4 mm hollow plugs on both ends. For information on



the many applications of our hollow plugs, see page 38.

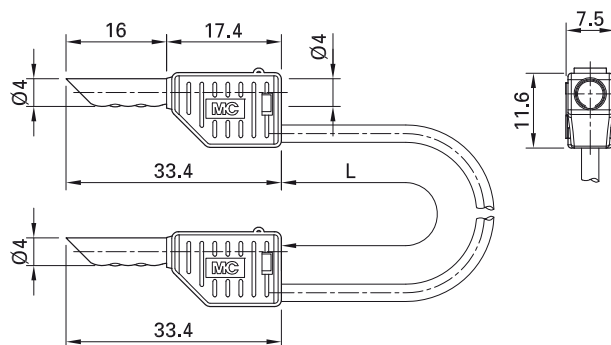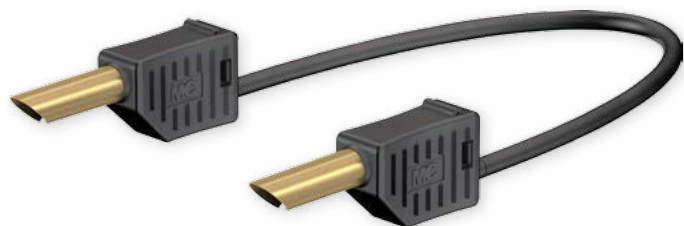

Order No.	Type	Rated voltage/current	Lead		Lead length L [cm]	*Colors
28.0055-□*	LK4-B	30 VAC / 19 A 60 VDC / 19 A	PVC 1.0 mm ²	Au	025 050 075 100 150 200	21 22 23 24 25 29
28.0056-□*	LK4-B/SIL	30 VAC / 19 A 60 VDC / 19 A	SIL 1.0 mm ²	Au	025 050 075 100 150 200	21 22 23 24 25

Test Lead FML SML

Highly flexible, with moulded stackable Ø 4 mm MULTILAM plugs on both ends.

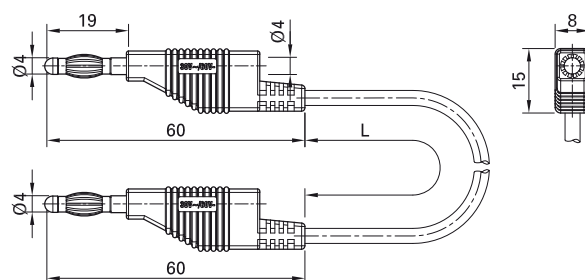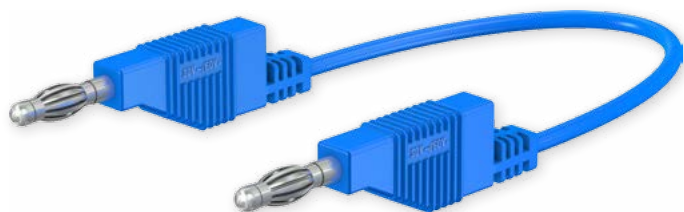

Order No.	Type	Rated voltage/current	Lead		Lead length L [cm]	*Colors
64.7289-□*	FML	30 VAC / 15 A 60 VDC / 15 A	PVC 0.75 mm ²	Ni	025 050 100 150 200	21 22 23 24 25
64.7288-□*	SML	30 VAC / 15 A 60 VDC / 15 A	SIL 0.75 mm ²	Ni	025 050 100 150 200	21 22 23 24 25