


Ø 2 mm Test Probes and Clips

Test Probe SPP2-S

With tapered, stainless steel rigid needle.
Handle guard chamfered on both sides.
Ø 2 mm rigid socket in handle accepting

spring-loaded Ø 2 mm plugs with rigid insulating sleeve. Supplied with protective cap.

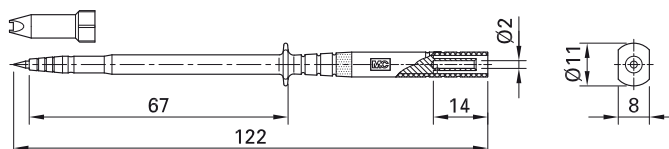

Order No.	Type	Rated voltage/current		*Colors
24.0239-*	SPP2-S	1000 V, CAT III / 1 A	CE	21 22