


Test Lead XV...-44...

Highly flexible, with insulation in PVC or silicone with stackable Ø4 mm MULTILAM plugs with rigid insulating sleeve on both ends.

XV...-44...

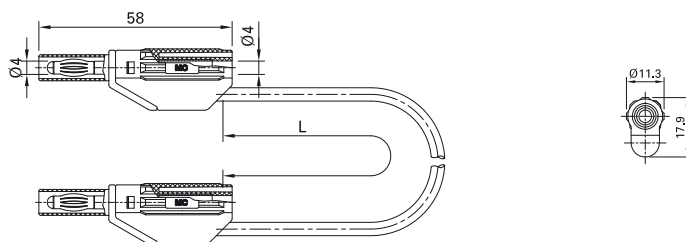

Order No.	Type	Rated voltage/current	Lead		Lead lengths L [cm] ¹⁾	*Colors ¹⁾
66.9738-□*	XVF-446	600 V, CAT II / 19 A	PVC 1,0 mm ²	Ni CE c UL US	025 050 100 200	21 22 23
66.9739-□*	XVS-446	600 V, CAT II / 19 A	SIL 1,0 mm ²	Ni CE c UL US	025 100 200	21 22 23
66.9736-□*	XVF-448	600 V, CAT II / 32 A	PVC 2,5 mm ²	Ni CE c UL US	025 100 150 200	21 22 23
66.9737-□*	XVS-448	600 V, CAT II / 32 A	SIL 2,5 mm ²	Ni CE c UL US	025 050 100 200	21 22 23

¹⁾ Other color and/or length combinations available on request.