

ECONOMICAL PLASTIC BATTERY HOLDERS



- Economical design, available with PC terminals or wire leads
- Batteries securely held in place to assure a positive connection and maintain a low contact resistance
- Contact springs self-adjust to variations in battery length
- Withstands shock and vibration
- Available with solder lugs or male/female snap fasteners
- For easy removal, available with ribbon
- Holders for multiple batteries are prewired in series.

SPECIFICATIONS

Holder: Polypropylene

Springs: Spring Steel, Nickel Plate

PC Pins: .031 (.79) Brass, Nickel Plate

Wires (Red & Black): #26 AWG, Tinned, .187 (4.8) end strip UL/CSA1007


MODIFICATIONS

We welcome the opportunity to quote on variations of standard items. Use our Engineering services for your custom-built holders. Holders for "C" and "D" cell are available on request.

PLASTIC BATTERY HOLDERS


"AA"

One (1) Cell




| | |
|------------------------|------------------------|
| CAT. NO. 2460 | PC Mount |
| CAT. NO. 2460RB | PC Mount w/ribbon |
| CAT. NO. 2461 | Wire Leads - 6.0 (150) |

Two (2) Cells - In Series

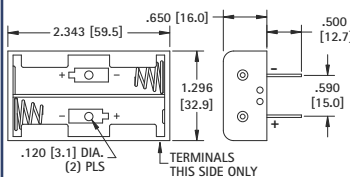


| | |
|------------------------|------------------------|
| CAT. NO. 2462 | PC Mount |
| CAT. NO. 2462RB | PC Mount w/ribbon |
| CAT. NO. 2463 | Wire Leads - 6.0 (150) |

Three (3) Cells - In Series



| | |
|------------------------|------------------------|
| CAT. NO. 2464 | PC Mount |
| CAT. NO. 2464RB | PC Mount w/ribbon |
| CAT. NO. 2465 | Wire Leads - 6.0 (150) |


Four (4) Cells - In Series



| | |
|------------------------|------------------------|
| CAT. NO. 2477 | PC Mount |
| CAT. NO. 2477RB | PC Mount w/ribbon |
| CAT. NO. 2478 | Wire Leads - 6.0 (150) |


"AAA"

One (1) Cell




| | |
|------------------------|------------------------|
| CAT. NO. 2466 | PC Mount |
| CAT. NO. 2466RB | PC Mount w/ribbon |
| CAT. NO. 2467 | Wire Leads - 6.0 (150) |

Two (2) Cells - In Series




| | |
|------------------------|------------------------|
| CAT. NO. 2468 | PC Mount |
| CAT. NO. 2468RB | PC Mount w/ribbon |
| CAT. NO. 2469 | Wire Leads - 6.0 (150) |

Three (3) "AAA" Cells - In Series



| | |
|------------------------|------------------------|
| CAT. NO. 2479 | PC Mount |
| CAT. NO. 2479RB | PC Mount w/ribbon |
| CAT. NO. 2480 | Wire Leads - 6.0 (150) |


Four (4) Cells - In Series



| | |
|------------------------|------------------------|
| CAT. NO. 2481 | PC Mount |
| CAT. NO. 2481RB | PC Mount w/ribbon |
| CAT. NO. 2482 | Wire Leads - 6.0 (150) |


"1/2AA" · "CR2" · "N" · "12V"

"1/2 AA" Cell - or "CR2" Cell




| | |
|------------------------|------------------------|
| CAT. NO. 2485 | PC Mount |
| CAT. NO. 2485RB | PC Mount w/ribbon |
| CAT. NO. 2486 | Wire Leads - 6.0 (150) |

"N" Cell - 1.5V or "12V" Cell



| | |
|------------------------|------------------------|
| CAT. NO. 2470 | PC Mount |
| CAT. NO. 2470RB | PC Mount w/ribbon |
| CAT. NO. 2471 | Wire Leads - 6.0 (150) |

Two (2) "N" or Two (2) "12V" Cells - In Series



| | |
|------------------------|------------------------|
| CAT. NO. 2472 | PC Mount |
| CAT. NO. 2472RB | PC Mount w/ribbon |
| CAT. NO. 2473 | Wire Leads - 6.0 (150) |