


POLYETHYLENE TUBING

6604.210	Black CONDUCTIVE	75µ m - 100mm width - 500m roll
6604.214	Black CONDUCTIVE	75µ m - 150mm width - 500m roll
6604.218	Black CONDUCTIVE	75µ m - 200mm width - 500m roll
6604.224	Black CONDUCTIVE	75µ m - 250mm width - 500m roll
6604.228	Black CONDUCTIVE	75µ m - 300mm width - 500m roll
6604.230	Black CONDUCTIVE	75µ m - 400mm width - 500m roll
6604.239	Green DISSIPATIVE	100µ m - 75mm width - 250m roll
6604.240	Green DISSIPATIVE	100µ m - 100mm width - 250m roll
6604.244	Green DISSIPATIVE	100µ m - 150mm width - 250m roll
6604.248	Green DISSIPATIVE	100µ m - 200mm width - 250m roll
6604.254	Green DISSIPATIVE	100µ m - 250mm width - 250m roll
6604.258	Green DISSIPATIVE	100µ m - 300mm width - 250m roll
6604.260	Green DISSIPATIVE	100µ m - 400mm width - 250m roll
6604.261	Green DISSIPATIVE	100µ m - 500mm width - 250m roll
6604.264	SHIELDING	78µ m - 100mm width - 100m roll
6604.266	SHIELDING	78µ m - 150mm width - 100m roll
6604.268	SHIELDING	78µ m - 200mm width - 100m roll
6604.270	SHIELDING	78µ m - 250mm width - 100m roll
6604.272	SHIELDING	78µ m - 300mm width - 100m roll
6604.275	SHIELDING	78µ m - 400mm width - 100m roll
6604.280	SHIELDING	78µ m - 800mm width - 100m roll

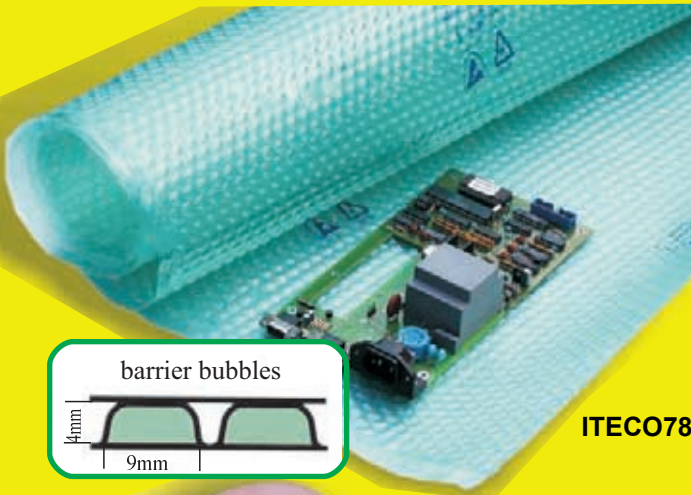

GREEN POLY ANTISTATIC BUBBLE PACK

Multilayer polyethylene, green colour, amine-free, heat sealable, recyclable. Small strong barrier bubble provides a superior packaging protection with excellent puncture and tear resistance.

Electrostatic decay:	< 2 sec
Rs:	< 10 ¹¹ Ω
Colour:	transparent green

7804.184 Dissipative bubble pack roll
0.5meters x 200meters

ITECO7804185 bubble pack 7804.185 Dissipative bubble pack roll
1meter x 200meters

FOAM (custom cut)

ANTISTATIC SOFT PINK FOAM

Use:	cushioning purposes
Density:	30 Kg/m ³ , Rs < 10 ¹² Ω
7804.161	1m x 1.5m sheet, thickness 6mm
7804.162	1m x 1.5m sheet, thickness 10mm

CONDUCTIVE SOFT BLACK FOAM

Use:	cushioning purposes
Density:	30 Kg/m ³ , Rs < 10 ⁵ Ω
7804.168	1m x 1m sheet, thickness 6mm
7804.170	1m x 1m sheet, thickness 10mm
7806.300	550 x 350mm sheet, thickness 10mm for Euro 600x400 container
7806.306	360 x 260mm sheet, thickness 10mm for Euro 300x400 container

CONDUCTIVE HARD BLACK FOAM

Use:	insertion of component leads
Density:	65Kg/m ³ , Rs < 10 ⁵ Ω
7804.172	1m x 1m sheet, thickness 6mm
7804.174	1m x 1m sheet, thickness 10mm

CROSS LINKED CONDUCTIVE BLACK FOAM

Use:	insertion of component leads high grade, extended life
Density:	60Kg/m ³ , Rs < 10 ⁶ Ω
7804.157	1m x 0.5m sheet, thickness 7.5mm
7804.158	1m x 1.78m sheet, thickness 7.5mm

