


# CU02 Series USB Type-B Receptacle Connectors



- 4 positions shielded receptacle connector
- 2mm centerline and 2.5mm centerline power contacts
- High durability and long cycle life
- Designed to meet the USB 2.0 Specifications
- USB 2.0 Approved Test ID: 60000738
- Lead Free soldering process available

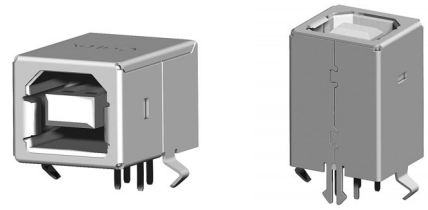

**RoHS** Compliant


Comet Electronics P/N: USB B-PCB-V

P/N CU02S\*V\*00\*





CU02S\*V\*000  
P/N: USB B-PCB-V


**RU** **RU**:E159616



CU02S\*V\*00H







Recommended P.C. Board Layout

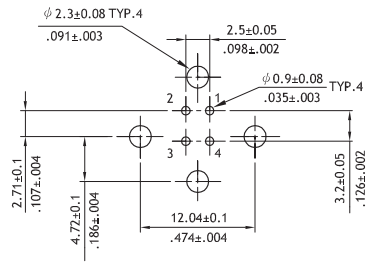

Recommended P.C. Board Layout

P/N CU02S\*H\*000

Comet Electronics P/N: USB B-PCB-R

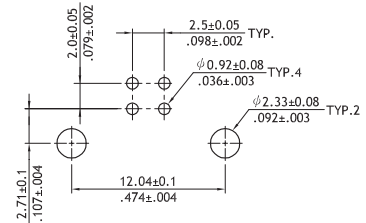

Recommended P.C. Board Layout

## Ordering Code

**1** **2** **3** **4** **5** **6**  
**CU02 S A H 0 000**

- 1** Series No.
- 2** S= Socket
- 3** Plating code:  
A= Selective Gold flash over 50μin Nickel  
\*Optional plating available but MOQ requested

- 4** Tail style:  
V= Vertical  
H= Right Angle
- 5** Insulator color: 1= Black, 0= White
- 6** Options:  
000= Standard  
00H= With hooks (Vertical Type only)