

CU01 Series USB Type-A Receptacle Connectors

- 2mm centerline and 2.5mm centerline power contacts
- High durability and long cycle life
- Designed to meet the USB 2.0 Specifications
- USB 2.0 Approved Test ID: 6000737
- Lead Free soldering process available




RoHS Compliant


RU **RU** :E159616

P/N CU01S*H*S00

Comet Electronics P/N: USB A-PCB-R

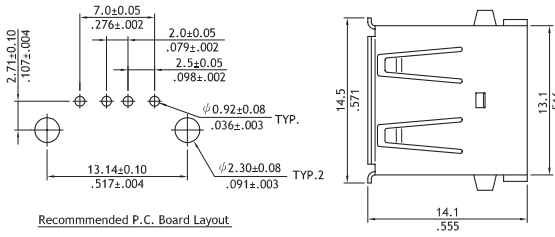


Recommended P.C. Board Layout

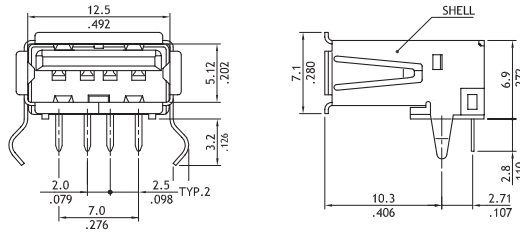


P/N CU01S*H*D00


Comet Electronics P/N: USB A-PCB-R-DUAL

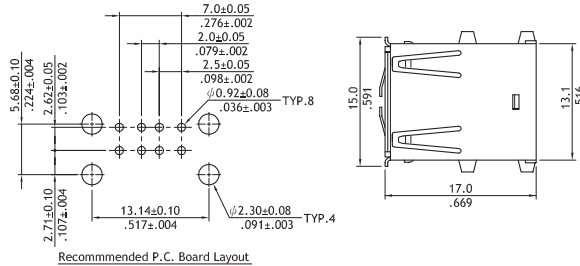

Recommended P.C. Board Layout

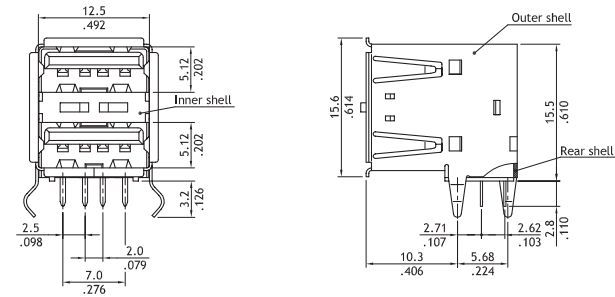


P/N CU01S*V*S00

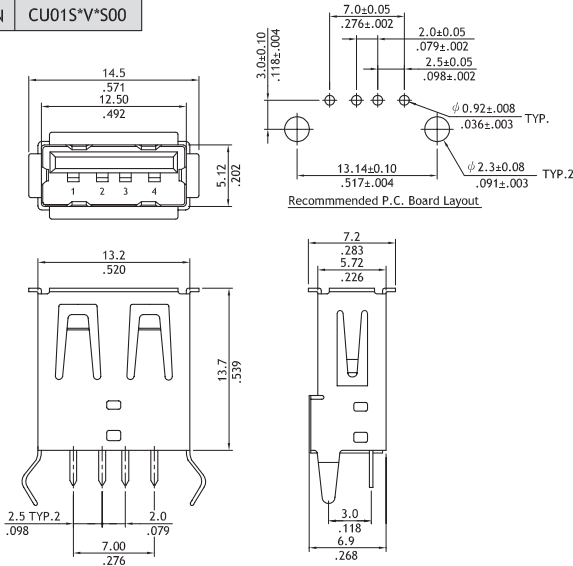

Recommended P.C. Board Layout

P/N CU01S*V*D00

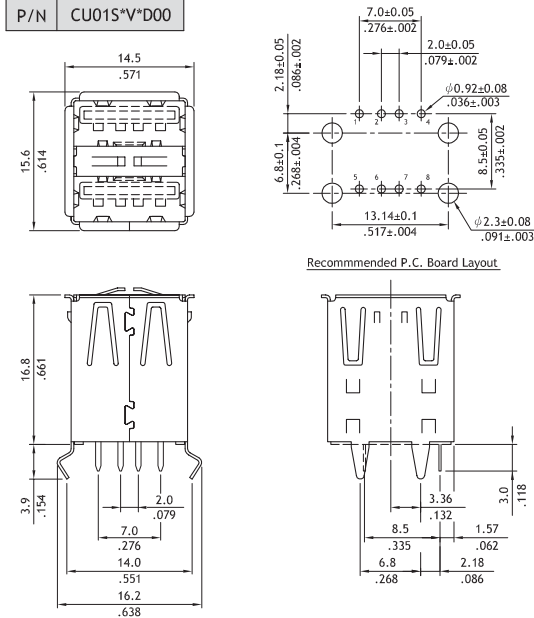

Recommended P.C. Board Layout

Ordering Code

1 **CU01** **2** **S** **3** **A** **4** **H** **5** **1** **6** **S** **7** **00**

- 1** Series No.
- 2** S= Socket
- 3** Plating code:
A= Selective Gold flash over 50µm Nickel on contact area
*Optional plating available but MOQ requested
- 4** Tail style:
V= Vertical
H= Right Angle
- 5** Insulator color:
1= Black ; 0= White
- 6** Type:
S= Single port
D= Dual ports
- 7** Options:
00= Standard
*Special options consult manufacturer