

Elesett / Eletec

Connector enclosure with connector



SE 420 E/CEE - 9016

Order no.: 43420109

* = Available on request.

Characteristics

Colour of enclosure group

White, similar to RAL 9016

Protection class

IP 40

Enclosure Material

PC/ABS blend, flame-resistant, UL 94 V0

Scope of delivery

Lid and base, screws

Note

- Lid in closed version


- base with connector (CEE 7/7; hybrid connector type E+F)

Dimensions

Dimensions

100 x 50 x 40 mm

Product drawing

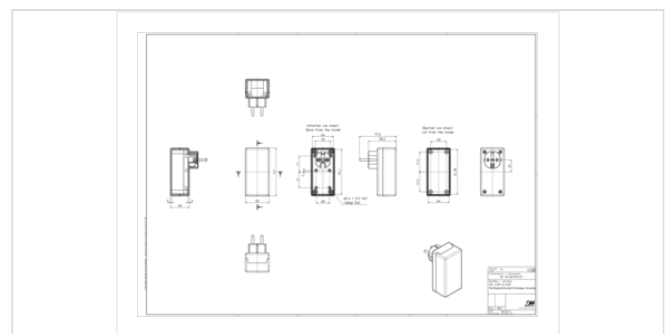

Technical documentation / Downloads

Technical drawings

3D product data in STEP format: 43420109 SE-420-E-CEE---9016.stp (2.1 MB)

Drawing for mechanical processing: 43420109 SE-420-E-CEE---9016-G.dxf (675.1 KB)

Milling contours are shown here as a DXF file. (Sub D, USB, HDMI, cable glands, ...)

Product drawing in PDF format: 43420109 SE-420-E-CEE---9016.pdf (156.6 KB)

Product drawing in DXF format: 43420109 SE-420-E-CEE---9016.dxf (1.1 MB)

Product information

elesett-eletec en.pdf (373.2 KB)

Important!

To compensate for pressure when temperatures change and cause moisture in the enclosure, we recommend that you use a pressure compensation element.

» [Additional information](#)

Matching accessories



Screws (SHR) and distance bolts (DIBLZ) for mounting bosses in plastic enclosures

59006219 SHR Z KA30x6

SD = 3.0 / ND = 2.4-2.6 / KD = 5.3