




# SMA FEMALE

Cable 1.13mm

I-PEX MHF MALE

70 mm±5

OM

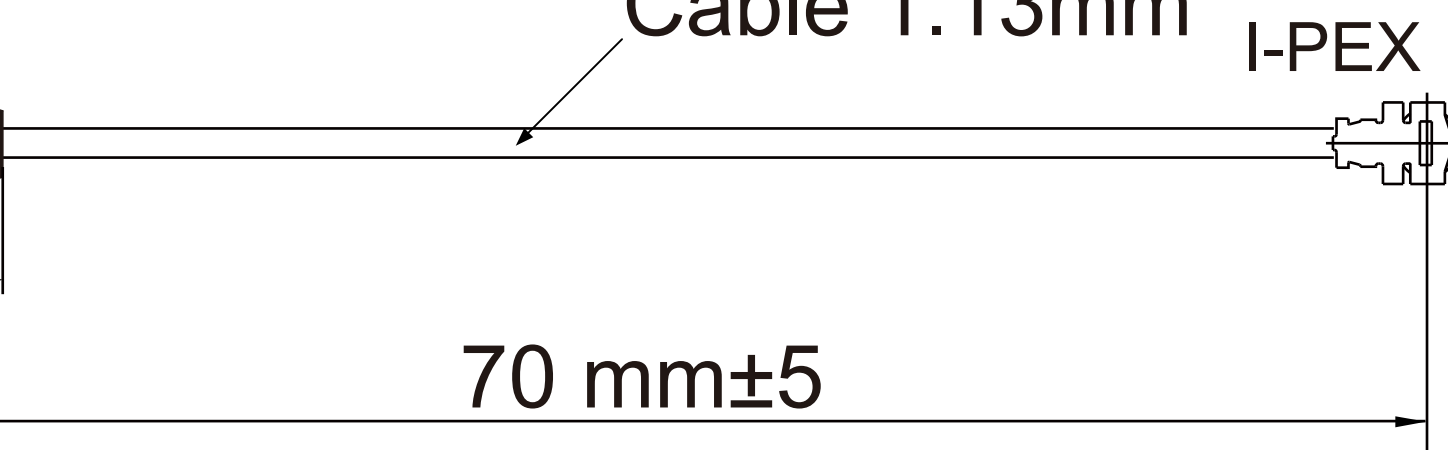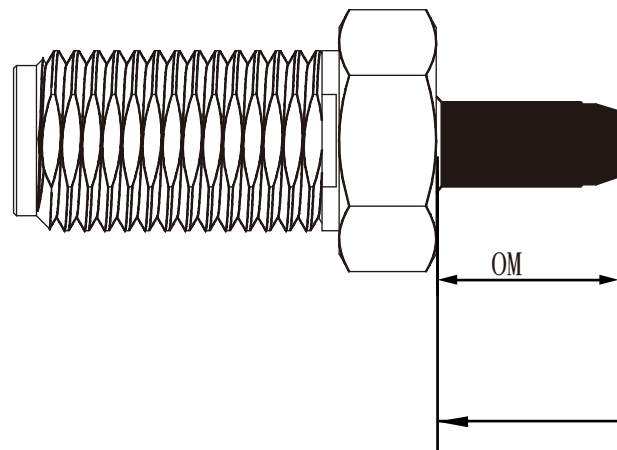

1	FERRULE	BRASS	GOLD PLATED
1	WASHER	SUS-304	GOLD PLATED
1	NUT	BRASS	GOLD PLATED
1	CONTACT	BRASS	GOLD PLATED
1	BODY	BRASS	GOLD PLATED
1	INSULATOR	TEFLON	NONE
1	BODY	BRASS	GOLD PLATED
QTY	DESCRIPTION	MATERIAL	FINISH

2	1	CONNECTOR	I-PEX	EQUIVALENT
1	1	WIRE	COAXIAL 1.13Ø BLACK	EQUIVALENT
ITEM	QTY	DESCRIPTION	MATERIALS	REMARK

### General Requirement:

- 1.Solder meeting SGS Europe Directive Criteria
- 2.Frequency Rating Pass IEEE802.11 3Ghz Rating
- 3.Insertion Lost<0.8db [sampling test]

- 4.Each cable Shall Pass 100%Continuity and Open/short test
- 5.Solder dip on both shield sleeve and the center conductor wire tinned
- 6.Plating on connector shell:Silver
- 7.Plating on contact:Gold

## RoHS Compliant

GSM MHF-SMA E7C CABLE		PART NO.		TOLERANCES ARE .X ± 0.2 .XX ± 0.1 .XXX ± AWG		DESCRIP TION:		REVISIONS		DATE	
		DWG NO.									
UNIT / mm		FILE NO.		DRAWING BY		AREA		REVISIONS		DATE	
		SCALE 1:1		PROJECTION 