


4 POSITION

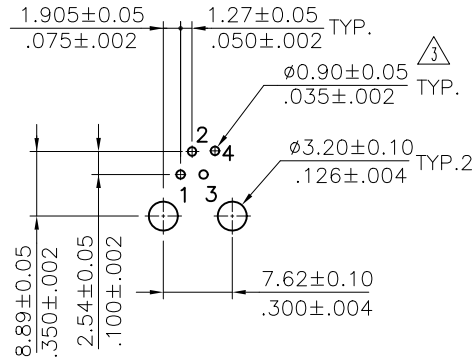



Recommended PC Board Layout

Ordering Code:


$\frac{CJ97}{①}$ $\frac{88}{②}$ $\frac{2}{③}$ $\frac{1}{④}$ $\frac{*}{⑤}$ $\frac{00}{⑥}$

- ① Series No.
- ② Contacts: 42= 4P2C ; 44= 4P4C ; 66= 6P6C ; 64= 6P4C ; 62= 6P2C ; 88= 8P8C
- ③ Plating option:
 2= Gold flash plated over Nickel
 3= 0.38 μ m(15 μ "") Gold plated over 1.27 μ m(50 μ "") Nickel
 4= 0.76 μ m(30 μ "") Gold plated over 1.27 μ m(50 μ "") Nickel
- ④ Ports: 1= 1 port
- ⑤ Insulator Color: 1= Black ; 9= Gray
- ⑥ Grounding pegs options: 00= Standard



Notes :
 * Insulator : Glass filled Polyester UL 94V-0
 * Contact : Phosphor Bronze
 * For Lead Free Wave Flow Process

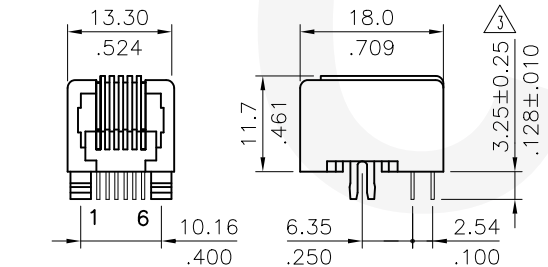


6 POSITION

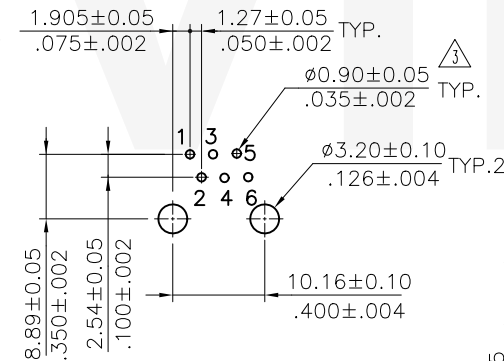

Recommended PC Board Layout

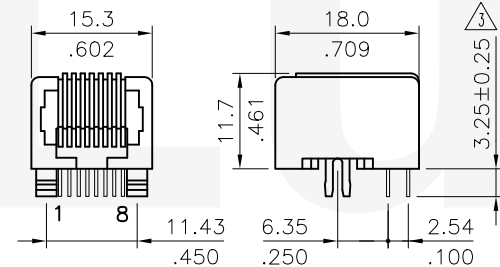

8 POSITION

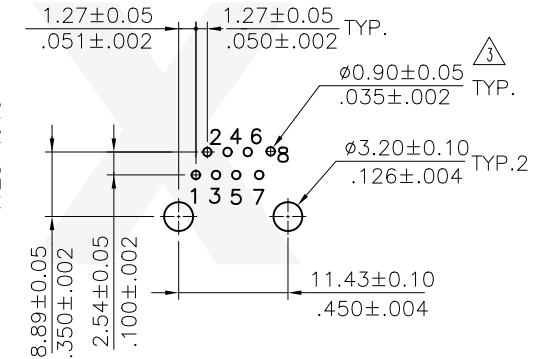

Recommended PC Board Layout

Lead Free Process

RoHS Compliant

④	Karen	3/05-14'	ECNT114035		DATE	UNIT: mm / inch	TITLE: BOARD MOUNT EXTRA LOW PROFILE SIDE ENTRY TELEPHONE JACK	瀚荃股份有限公司 CviLux Corporation	
③	Karen	9/09-08'	ECN08434/ECR08069-0		DRAWN BY: Karen	3/6-14'	TOLERANCE UNLESS OTHERWISE SPECIFIED		MATERIAL:
②	Sandy	11/30/06'	ECN06413/ECR06063-1		ENGINEER: Sun	3/7-14'	.X ± 0.3 / .012 X' ± 1"		FINISH:
①	SUN	10/25/05'	ECN05359		CHECKED BY: Eisley	3/7-14'	.XX ± 0.20 / .008 .X' ±		
SYM	NAME	DATE	REVISIONS	APPROVED BY: David	3/7-14'	.XXX ± 0.08 / .003 .XX' ±		DRAWING NO. CJ9704SG SCALE 1 / 1 PART NO. CJ97***1*00 SHEET 1 OF 1	