
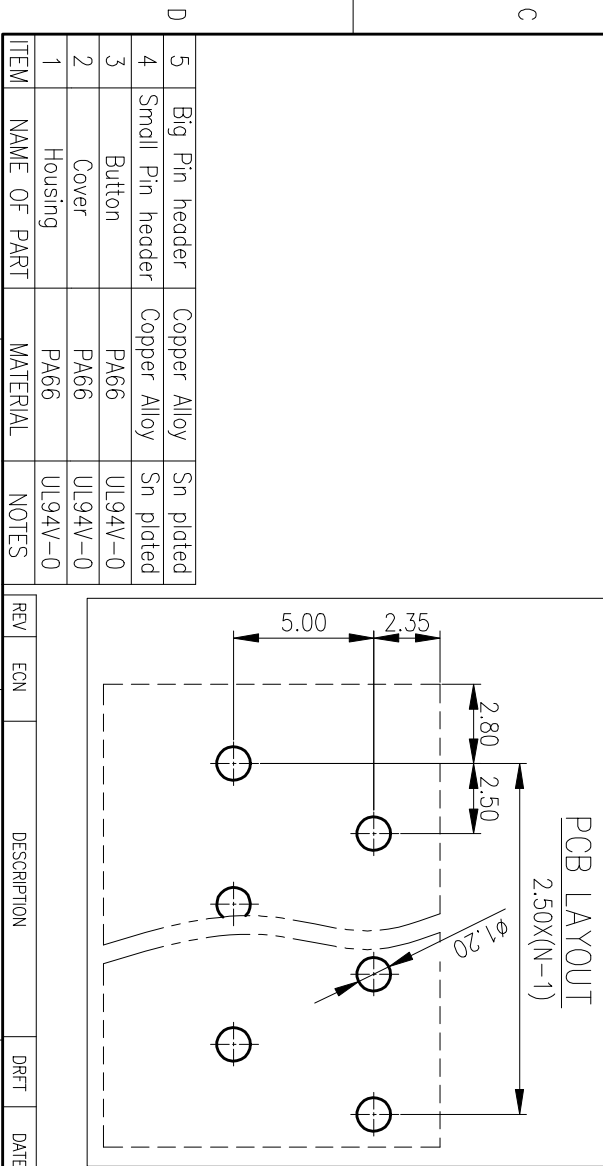
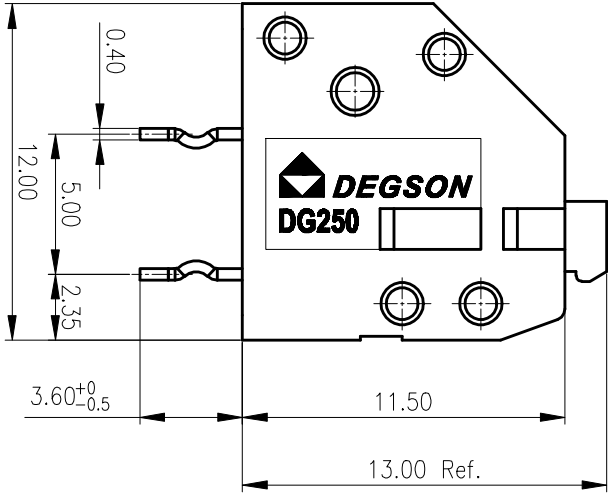


公差表/General Tolerances(mm)													公差带
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
3	6	10	18	30	50	80	120	180	250	315	400	500	
±0.12 ±0.18 ±0.22 ±0.26 ±0.31 ±0.37 ±0.57 ±0.80 ±0.93 ±1.05 ±1.15 ±1.60 ±2.20 ±2.50													

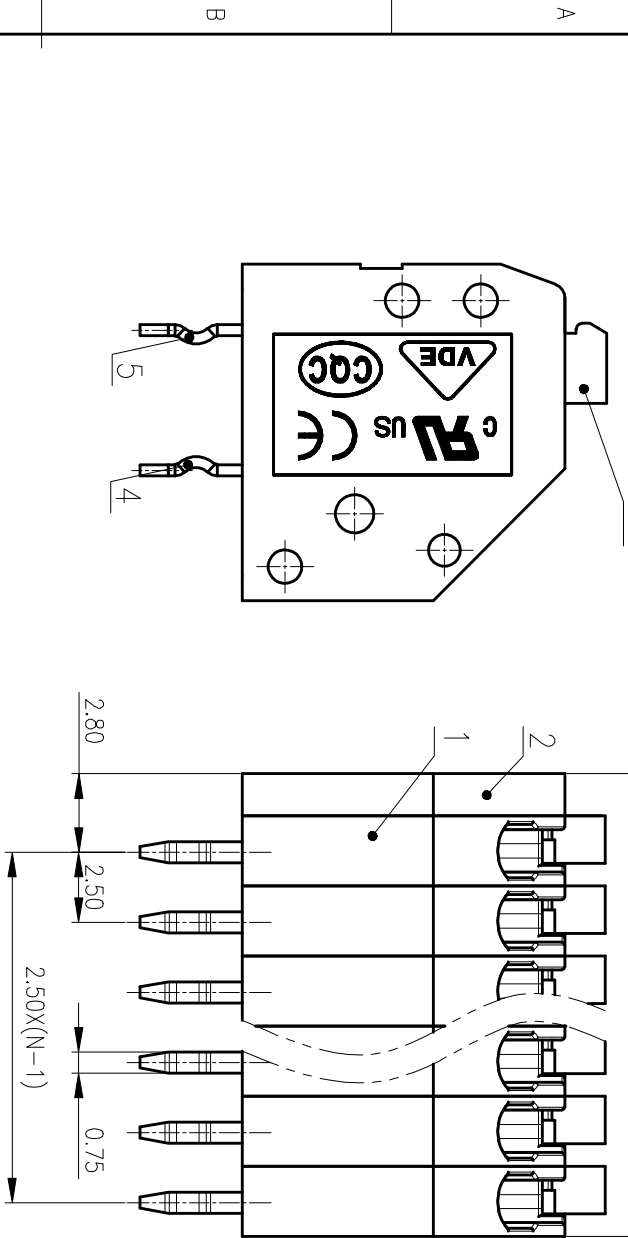

ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PA66	UL94V-0
2	Cover	PA66	UL94V-0
3	Button	PA66	UL94V-0
4	Small Pin header	Copper Alloy	Sn plated
5	Big Pin header	Copper Alloy	Sn plated

REV	ECN	DESCRIPTION	DRAFT	DATE
1				
2				
3				
4				
5				
6				

MATERIAL: /		SURFACE: /	
MAT NO.: /			
STATUS: /			
APPD: LIGL 2020.06.19		NAME: DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD	
CHKD: Mek 2020.06.19		DG250-2.5-XXP-1Y-01A(H)	
DFTI: YYC 2017.09.02		DRAWING NO.: DG250-2.5-C02	
SIZE: A4		TYPE: CUSTOMER DRAWING	
(mm)		SCALE: 4:1	
(inch)		SHEET	
		1/1	

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/2	300/2	300/2
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等	/	III/2	/
绝缘/Pollution Degree			
额定电压/电涌/Rated Voltage(V)/Current(A)	/	250/2	/
工频耐压/Withstanding voltage(V/1Min)		AC2000	
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm² /AWG)		0.2~0.5/24~20	
间距/Pitch(mm)/线数范围/Poles		2.5/N=01~24P	
剥线长度/Stripping length(mm)		8.5~9.5	
使用温度范围/Operating Temperature(°C)		-40~+105	
符合RoHS要求/Conform to RoHS		Yes	
标准颜色编号/Standard color number:			
PANTONE / RAL			/

宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

DG250-2.5-XXP-1Y-01A(H)

DRAWING NO.: DG250-2.5-C02

TYPE: CUSTOMER DRAWING