



Test lead FML SML

Highly flexible, with moulded stackable
 Ø 4 mm MULTILAM plugs on both ends.

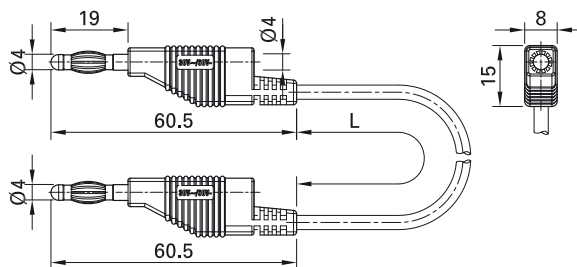

Order No.	Type	Rated voltage/current	Lead		Lead length L [cm]	*Standard colors
64.7289-□*	FML	30 VAC / 15 A 60 VDC / 15 A	PVC 0.75 mm ²	Ni	100	21 22
64.7288-□*	SML	30 VAC / 15 A 60 VDC / 15 A	SIL 0.75 mm ²	Ni	050 100 200	21 22

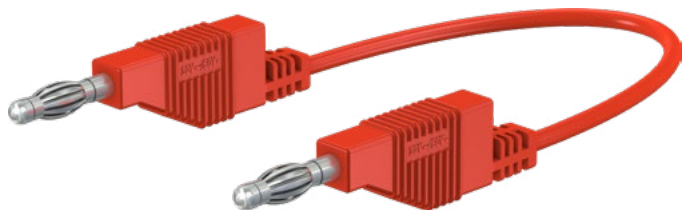

Optional colors 23 24 25 26 29

Optional lengths on demand

Further information, page 6



User information **i002**

www.staubli.com/electrical