

DATA SHEET


MODEL No : LL2501PTBG4-702
ENG. No:

Description:

- 5mm Oval lamp
- Lens Color: Colored Diffused
- Emitting Color: Bluish Green
- Viewing Angle :70°
- Stopper

Dice Material: InGaN

PREPARED BY	CHECKED BY	APPROVED BY	CUSTOMER APPROVED SIGNATURES

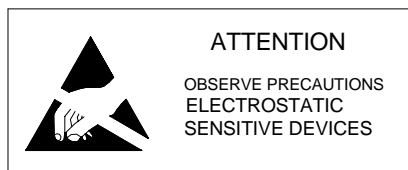

Model No.	LL2501PTBG4-702
Doc. No.	

Applications:

Dimension Drawing

Absolute Maximum Ratings at Ta = 25°C

Items	Symbol	Absolute maximum Rating	Unit
Forward Current	I_F	25	mA
Peak Forward Current*	I_{FP}	100	mA
Reverse Voltage	V_R	5	V
Power Dissipation	P_D	100	mW
Operation Temperature	T_{opr}	-20 ~ +75	°C
Storage Temperature	T_{stg}	-30 ~ +80	°C
Lead Soldering Temperature	T_{sol}	Max.260°C for 3 sec Max. (3mm from the base of the epoxy bulb)	


*pulse width $\leq 0.1\text{msec}$ duty $\leq 1/10$

Typical Electrical & Optical Characteristics (Ta = 25°C)

Items	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	V_F	$I_F = 20\text{mA}$	2.8	3.4	4.0	V
Reverse Current	I_R	$V_R = 5\text{V}$	---	---	10	μA
Dominant Wavelength	λ_D	$I_F = 20\text{mA}$	---	505	---	nm
Luminous Intensity	I_V	$I_F = 20\text{mA}$	---	2300	---	mcd
50% Power Angle	20½H-H	$I_F = 20\text{mA}$	---	70	---	deg
	20½V-V	$I_F = 20\text{mA}$	---	---	---	deg

Important Notes:

- 1) All ranks will be included per delivery, rank ratio will be determined by LEDMAN.
- 2) Tolerance of measurement of luminous intensity is $\pm 15\%$.
- 3) Tolerance of measurement of dominant wavelength is $\pm 1\text{nm}$.
- 4) Tolerance of measurement of Vf is $\pm 0.05\text{V}$.
- 5) Packaging methods are available for selection, please refer to PACKAGING STANDARD.
- 6) Please refer to LED LAMP RELIABILITY TEST STANDARD for reliability test conditions.

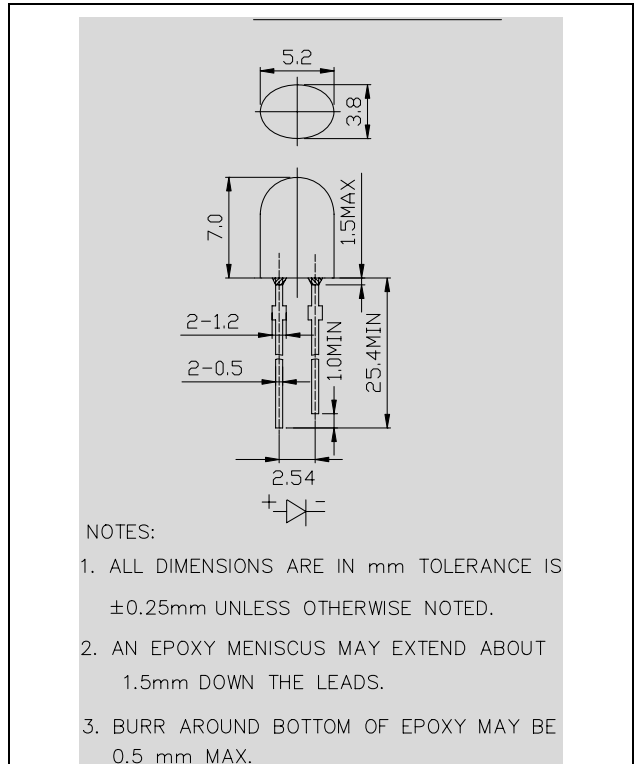

Typical Optical-Electronic Characteristic Curves

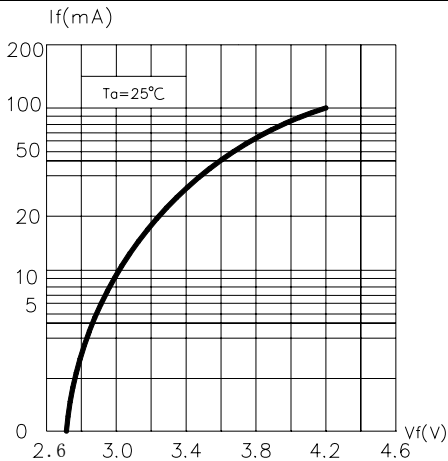


Fig.1 Forward Current vs. Forward Voltage

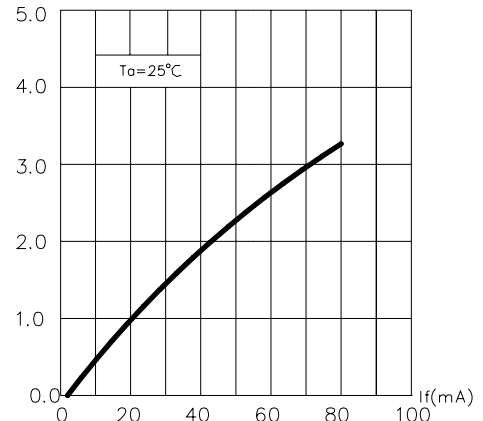


Fig.2 Relative Luminous Intensity vs. Forward Current

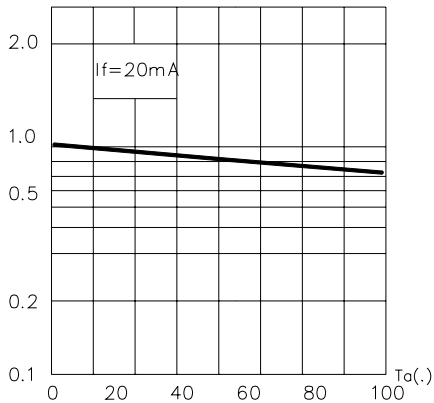


Fig.3 Relative Luminous Intensity vs. Ambient Temperature

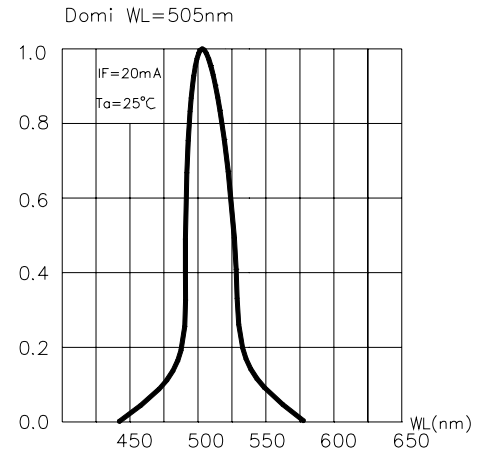


Fig.4 Relative Luminous Flux vs. Wavelength

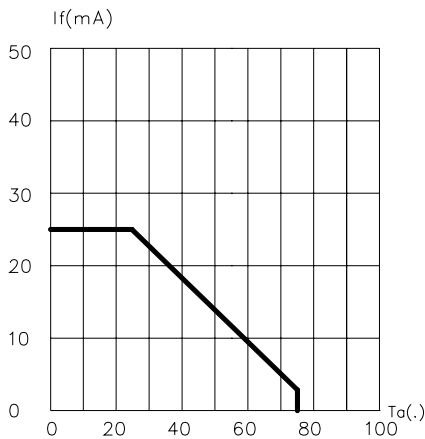


Fig.5 Maximum Forward Current vs. Ambient Temperature

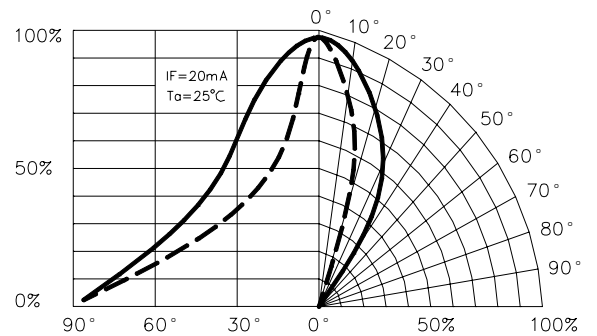


Fig.6 Relative Luminous Intensity vs. Radiation Angle

Items	Signatures	Date	<div style="border: 1px solid black; border-radius: 50%; padding: 10px; display: inline-block;">R&D ISSUE</div>
Prepared by	Dan yang		
Checked by			
Approved by			