


Pitch (mm)	1,27
Mating contact size	sq. 0,40
No of contacts	16
Positioning peg	Without positioning peg
Polarising	No
Locking	No
Material contact	Copper alloy
Plating contact	Au
Material insulator	High temp. thermoplast UL94V-0
Rated current	1,0 A
Rated voltage	100 V _{RMS} / V _{DC}
Withstand voltage	300 V _{RMS} for 1 minute
Operating temperature	-40°C to +105°C
Max. processing temper.	260°C for 10 seconds
Packaging	Tube
Cap	With cap
A (Length)	5,68
B (Mating)	3,00
C (PCB side)	5,50
L	2,68

Straight pin headers 1,27 mm pitch and 0,40 mm square pins for SMD mount. Pick and place cap available upon request. Customized connectors possible.

Double row

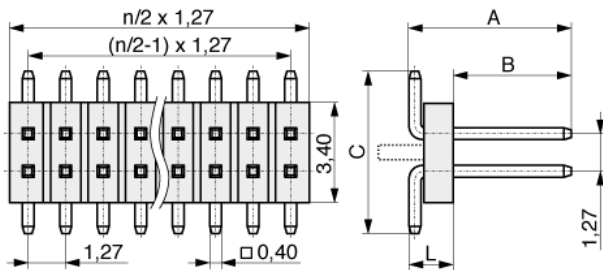

Footprint

