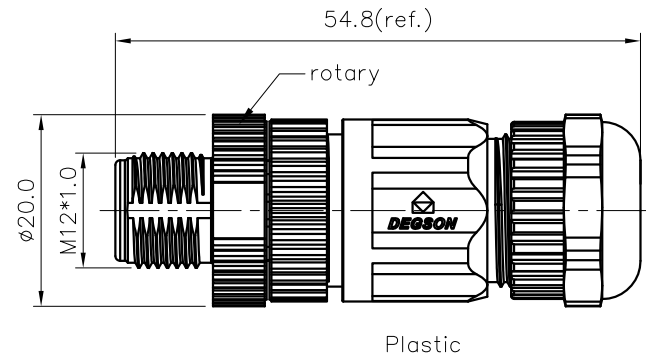



REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------



NOTES:

- Rated voltage/current :
3pin A: 250V / 4A
4pin A: 250V / 4A
5pin A: 60V / 4A
6pin A: 30V / 2A
8pin A: 30V / 2A
5pin B: 60V / 4A
4pin D: 250V / 4A
- Withstanding voltage :
3,4pin A: AC1500V/1Min
5pin A: AC1120V/1Min
6,8pin A: AC500V/1Min
5pin B: AC1120V/1Min
4pin D: AC1500V/1Min

3.Levels of protection:IP67

4.Wire range :

- 3pin A: 24~20AWG/0.25~0.52mm²
- 4pin A: 24~20AWG/0.25~0.52mm²
- 5pin A: 24~20AWG/0.25~0.52mm²
- 6pin A: 24~22AWG/0.25~0.34mm²
- 8pin A: 24~22AWG/0.25~0.34mm²
- 5pin B: 24~20AWG/0.25~0.52mm²
- 4pin D: 24~20AWG/0.25~0.52mm²

5.Cable OD: 4~8mm

6.Wire connection mode: screw

7.Operating temperature: -25°C~+105°C

8.RoHS Compliance


9.Tolerance : ±0.5mm

PB-M12X-XXP-MM-SL7001-00A(H)


Coding: A,B,D

Pin number: 03,04,05,
06,08


5pin B Coding

Pin Assignments
Front View


4pin D Coding

Pin Assignments
Front View


3pin A Coding

Pin Assignments
Front View


4pin A Coding

Pin Assignments
Front View


5pin A Coding

Pin Assignments
Front View

6pin A Coding

Pin Assignments
Front View

8pin A Coding

Pin Assignments
Front View

DETACHED LISTS	PART NO.: PBM12XXXXPMSL700100AH	NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:	NAME: PB-M12X-XXP-MM-SL7001-00A(H)		
	CHKD:			
	DRFT: SQ 2019.05.17	TITLE: CUSTOMER DRAWING	REV	D0-1
	THIRD ANGLE PROJECTION		DRAWING NO.: XXXXXXXX-XX-CXX	SHEET 1/1
		MM (INCH)	DO NOT SCALE DRAWING	SCALE 1:1