






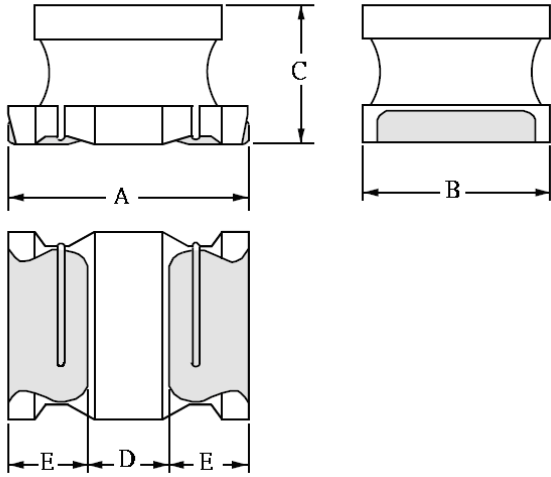


SPECIFICATION FOR APPROVAL

CUSTOMER:		DATE:	
PART NO: WDI3225-101K		DWG.NO: HI4008191	
CUSTOMER PART NO:		CUST.DWG.NO:	
<p>(1) DIMENSION(UNIT: mm)</p> 		A	3.2 ± 0.3 m/m
		B	2.5 ± 0.2 m/m
		C	2.0 ± 0.2 m/m
		D	1.3 ± 0.2 m/m
		E	0.9 ± 0.3 m/m
		F	m/m
		G	m/m
		H	m/m
		I	m/m
		J	m/m
		(2)ELECTRICAL REQUIREMENTS	
L (uH)	100 ± 10%		
RDC (Ω)	3.6 (MAX)		
IDC (A)	0.1 (MAX)		
TEST CONDITION	1MHz / 1V		
TEST INSTRUMENTS LCR-METER 3260B DC BIAS 3265B		APPROVED BY 	
		CHECKED BY 	
		DRAWN BY 	

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

TEST DATA

CUSTOMER:				DATE:			
PART NO: WDI3225-101K				DWG.NO: HI4008191			
CUSTOMER PART NO :				CUST.DWG.NO :			
TEST CONDITION: 1MHz / 1V				DIMENSION (UNIT : mm)			
ITEM	L (uH)	RDC (Ω)	IDC (A)	A	B	C	
SPEC	100 ± 10%	3.6 (MAX)	0.1 (MAX)	3.2 ± 0.3	2.5 ± 0.2	2.0 ± 0.2	
1	104.5	3.13	OK	3.22	2.48	2.00	
2	99.5	3.12	OK	3.20	2.48	2.00	
3	100.6	3.09	OK	3.22	2.48	2.00	
4	100.3	3.03	OK	3.24	2.50	2.04	
5	104.5	3.13	OK	3.20	2.50	2.02	
6	99.5	3.12	OK	3.20	2.52	2.02	
7	100.2	3.12	OK	3.24	2.50	2.04	
8	100.6	3.09	OK	3.20	2.50	2.02	
9	100.3	3.03	OK	3.22	2.48	2.00	
10	100.3	3.03	OK	3.20	2.48	2.00	
\bar{X}	101.03	3.09		3.21	2.49	2.01	
R	5	0.1		0.04	0.04	0.04	
				APPROVED BY			
							
				CHECKED BY			
							
				DRAWN BY			
							

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw