


TOLERANCE:

| Abbr. | TOLERANCE | | | | |
|-------|--|-------|-------|--------|--|
| | P=0.5 | P=0.8 | P=1.0 | P=1.25 | P=2.54 |
| P | ±0.05 | ±0.08 | ±0.08 | ±0.10 | ±0.20 |
| Pt | ±0.08 | ±0.10 | ±0.10 | ±0.15 | $\begin{matrix} +0.2 \\ -0.4 \end{matrix}$ |
| W | ±0.08 | ±0.10 | ±0.10 | ±0.20 | $\begin{matrix} +0.2 \\ -0.4 \end{matrix}$ |
| M | ±0.08 | ±0.15 | ±0.15 | ±0.20 | ±0.30 |
| Cw | ±0.02 | ±0.03 | ±0.03 | ±0.03 | ±0.04 |
| L | (30~100)±3, (101~300)±5, (301~600)±10, (Length more than 601mm)±15mm | | | | |

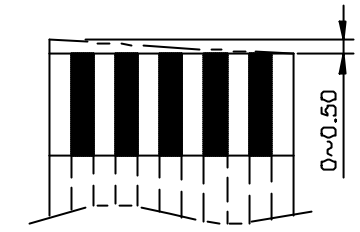

Tolerance of Cutting Tilt

| Customer P/N | CviLux P/N | No. of Conductor | Dimension | | | | | | | | | | | Support Tape Color | |
|--------------|------------|------------------|-----------|----|---|---|---|----|---------|--------|--------|--------|--------|--------------------|--|
| | | | P | Pt | L | W | M | Cw | Ct±0.01 | S1±1.0 | S2±1.0 | d1±2.0 | d2±2.0 | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |

| | | | | | | | | |
|-----|------|------|-----------|--------------|------|--------------------------------------|---|--------------------------------|
| 4 | | | | | DATE | UNT: mm | TITLE: FLAT FLEXIBLE CABLE (TERMINAL TYPE : T2) | 瀚荃股份有限公司 CviLux Corporation |
| 3 | | | | DRAWN BY: | | TOLERANCE UNLESS OTHERWISE SPECIFIED | MATERIAL: SEE PRODUCT SPECIFICATION | |
| 2 | | | | ENGINEER: | | .X ± | X' ± r' | DRAWING NO. FFC002SC FILE NO. |
| 1 | | | | CHECKED BY: | | .XX ± | .X' ± | |
| SYM | NAME | DATE | REVISIONS | APPROVED BY: | | XXX ± | XX ± | SCALE 1 / 1 SHEET 1 OF 1 |