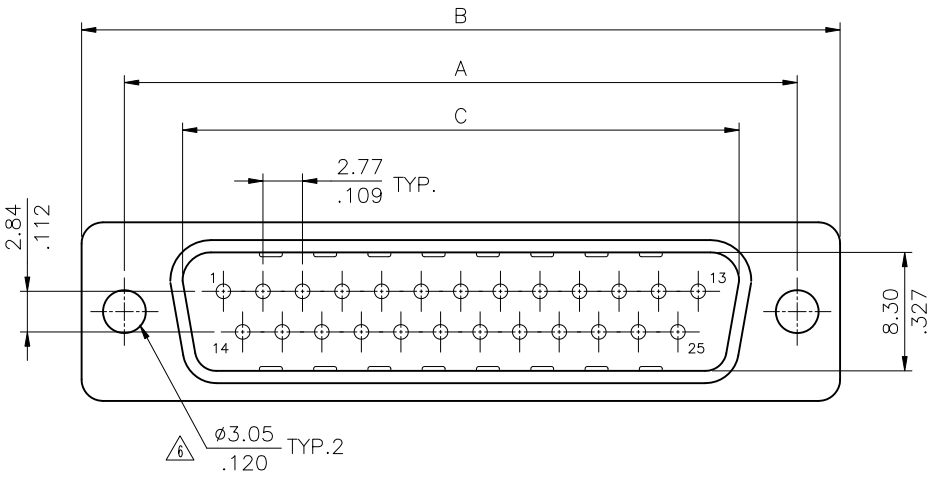

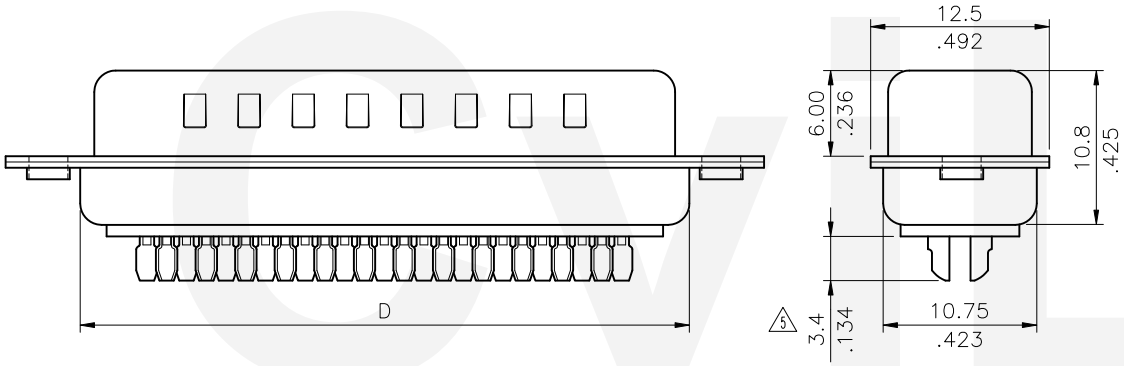

Materail:

Insulator: Glass filled polyester UL 94V-0

Contact: Brass

⚠7 Shell: Steel, Nickel plated as standard

Ordering Code

CD51 ① 25 ② P ③ A ④ 1 ⑤ 00 ⑥

① Series No.

② No. of Circuits: 09,15,25,37

③ Concact type: P= Plug(Male)

④ Plating option:

A= Selective Gold flash plated over Nickel

⑤ Color: 1= Black, 7= Blue, 0= White

⑥ Other Option:

00 = With ø3.05mm holes on shell(Standard)

A0 = Riveted #4-40 UNC close nuts on front shell

B0 = Riveted #4-40 UNC open nuts on front shell

C0 = Riveted #4-40 UNC open nuts on rear shell

⚠8 (C0 Type only 15, 25, 37 circuits))

Circuits	Dimension			
	A	B	C	D
9	25.00(.984)	30.8(1.213)	16.92(.666)	19.20(.756)
15	33.32(1.312)	39.2(1.543)	25.25(.994)	27.70(1.091)
25	47.04(1.852)	53.1(2.091)	38.96(1.534)	41.10(1.618)
37	63.50(2.500)	69.4(2.732)	55.42(2.182)	57.30(2.256)

Mounting Style

Lead Free Process

RoHS Compliant

Code	00	Code	A0	Code	B0	Code	C0
		DIM. L= 5.8mm		DIM. L= 4.0mm		DIM. L= 4.0mm	

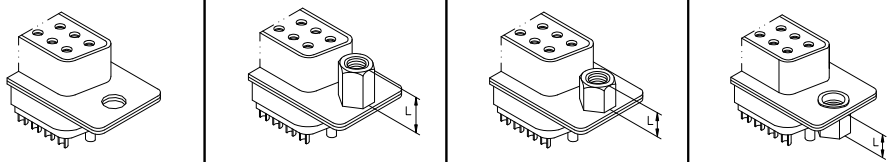

SYM	NAME	DATE	REVISIONS
⚠8	Karen	5/31-22'	ECNT122042/ECRT122006
⚠7	Ken	3/15-18'	ECRT117079/ECNT118047
⚠6	Sandy	3/25-10'	ECN10079
⚠5	Sun	9/30-09'	ECR09128-0/ECN09488

CVILUX CORP 2022.08.11 ISSUED

		DATE
DRAWN BY:	Karen	7/26-22'
ENGINEER:	Sun	7/26-22'
CHECKED BY:	Eisley	8/1-22'
APPROVED BY:	Eisley	8/1-22'

UNIT: mm / inch

TOLERANCE UNLESS OTHERWISE SPECIFIED

.X	±0.30/.012	X°	± 1°
.XX	±0.20/.008	.X°	±
.XXX	±0.10/.004	.XX°	±

SOLDER CUP SERIES

MATERIAL:

FINISH:

瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CD5101SJ	PART NO.	CD51**PA***
SCALE	2 / 1	SHEET	1 OF 1