


Material:

* Insulator: Glass filled polyester UL 94V-0

* Contact: Brass

△ * Shell: Steel, Nickel plated as standard

Recommended P.C. Board Layout see drawing No. CD5303S*

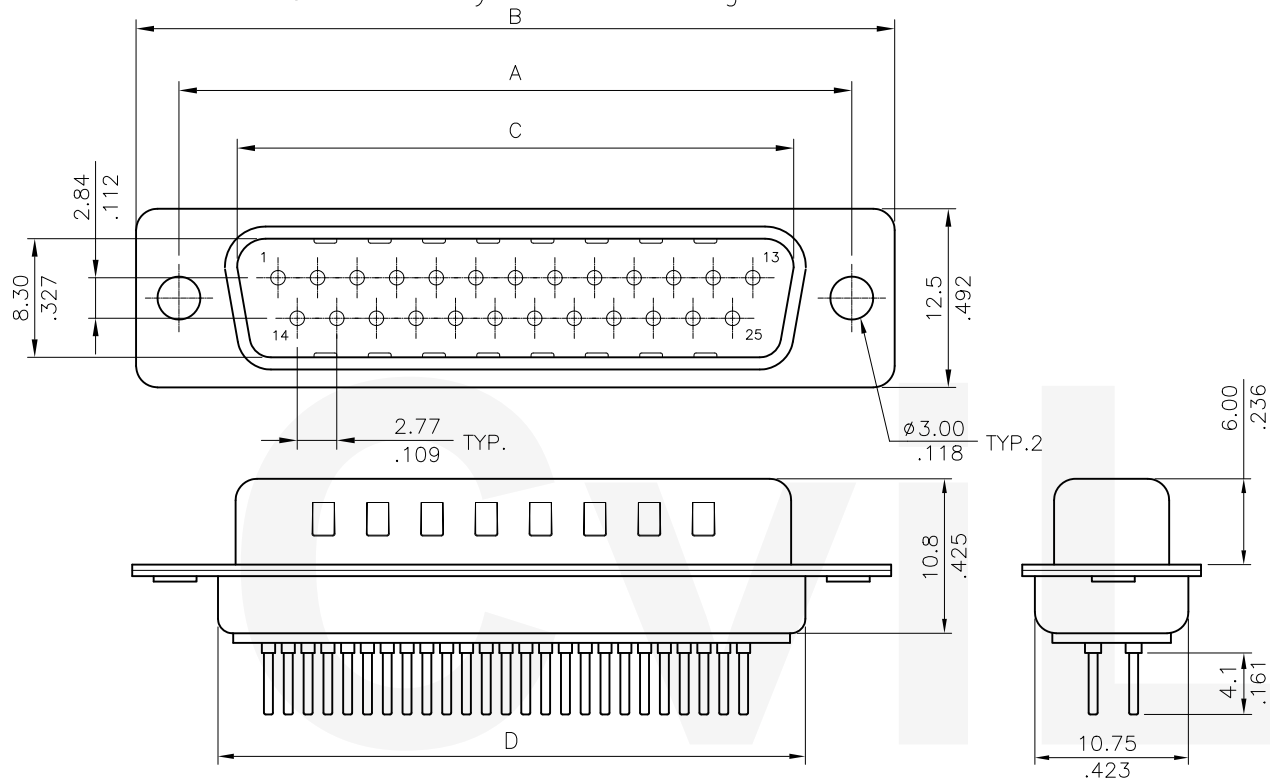

Ordering Code:

CD53 25 P 2 1 00
① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② Contacts: 9,15,25,37
- ③ Contact type: P= Plug(Male)
- ④ Plating option:
2= Gold flash plated over Nickel
A= Selective Gold flash plated over Nickel
B= Selective 0.38 μ m(15 μ ") Gold plated over 1.27 μ m(50 μ ") Nickel
C= Selective 0.76 μ m(30 μ ") Gold plated over 1.27 μ m(50 μ ") Nickel
- ⑤ Color: 1= Black, 0= White
- ⑥ Other Option:
△ 00 = With $\phi 3.00$ mm holes on shell(Standard)
B0 = Riveted #4-40 UNC open nuts on front shell
C0 = Riveted #4-40 UNC open nuts on rear shell
△ D0 = Riveted #4-40 UNC ground stand-off on rear shell

Circuits	Dimension			
	A	B	C	D
9	25.00(.984)	30.8(1.213)	16.92(.666)	19.20(.756)
15	33.32(1.312)	39.2(1.543)	25.25(.994)	27.70(1.091)
25	47.04(1.852)	53.1(2.091)	38.96(1.534)	41.10(1.618)
37	63.50(2.500)	69.4(2.732)	55.42(2.182)	57.30(2.256)

Mounting Style				RoHS Compliant			
Code	00	Code	B0	Code	C0	Code	D0
			DIM. L= 4.0mm		DIM. L= 4.0mm		DIM. L= 6.0mm

④						DATE	UNIT: mm / inch	TITLE: D-SUB MALE CRIMP CLIP SERIES	 瀚荃股份有限公司 CviLux Corporation
③	Ken	3/15-18'	ECRT117079/ECNT118047		DRAWN BY:	Ken	3/15-18'	TOLERANCE UNLESS OTHERWISE SPECIFIED	
②	Sandy	3/25-10'	ECN10079		ENGINEER:	Sun	3/16-18'	.X ±0.30/.012 X: ± 1'	
①	SUN	8/27/03'	ECN03269		CHECKED BY:	Eisley	3/23-18'	.XX ±0.20/.008 X: ±	
SYM	NAME	DATE	REVISIONS		APPROVED BY:	Eisley	3/23-18'	.XXX ±0.10/.004 XX: ±	MATERIAL:
							FINISH:		DRAWING NO. CD5302SG
									PART NO. CD53**P****
									SCALE 2 / 1
									SHEET 1 OF 1