


Material:

* Insulator: Glass filled polyester UL 94V-0

* Contacts: Copper alloy

△ * Shell: Steel, Nickel plated as standard

Recommended P.C. Board Layoue see drawing No. CD6113S*

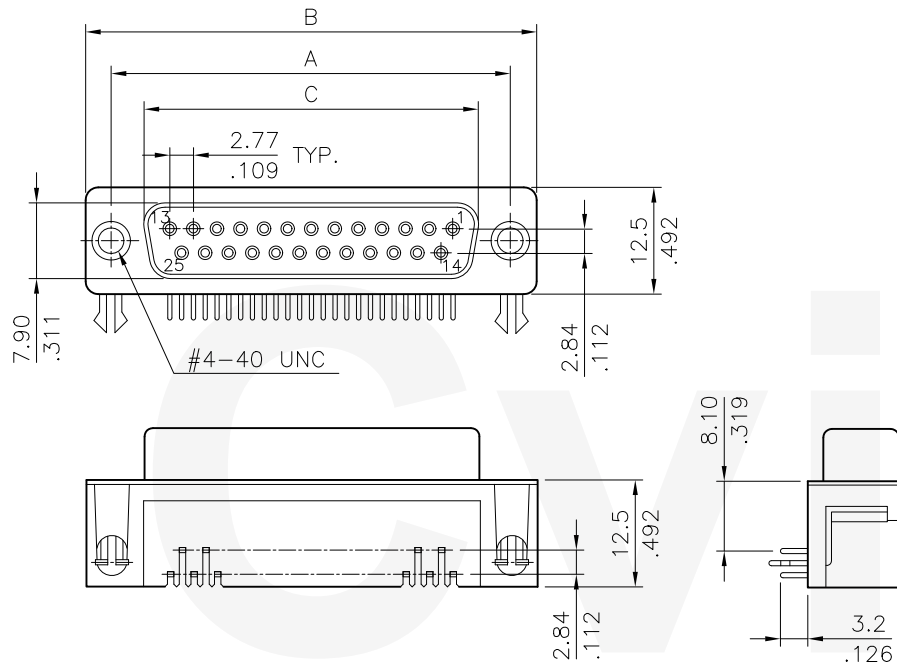

Ordering Code:

CD61 ** S * 1 *0
① ② ③ ④ ⑤ ⑥

① Series No.

② Contacts

③ Contact type: S= Receptacle (Female)

④ Plating option:

2= Gold flash plated over Nickel

A= Selective Gold flash plated over Nickel

B= Selective 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel

C= Selective 0.76um(30μ") Gold plated over 1.27μm(50μ") Nickel

⑤ Color: 1= Black

⑥ Other Option:

F0= Riveted ground hooks with #4-40 UNC open (Standard)

G0= Riveted ground hooks pre-loaded #4-40 UNC Hex screw

I0= Riveted ground tabs thread #4-40 UNC open and ground tabs with ø3.2mm holes

J0= Assembly ground hooks by #4-40 UNC Hex screws

Circuits	Dimension		
	A	B	C
9	25.00(.984)	30.8(1.213)	16.30(.642)
15	33.32(1.312)	39.2(1.543)	24.60(.969)
25	47.04(1.852)	53.1(2.091)	38.30(1.508)
37	63.50(2.500)	69.4(2.732)	54.80(2.157)

Mounting Style				Lead Free Process		RoHS Compliant	
Code	F0	Code	G0	Code	I0	Code	J0
			DIM. L= 4.8mm		ø A= 3.2mm		DIM. L= 4.8mm

△4																			
△3																			
△2																			
△1	Ken	3/12-18'	ECRT117079/ECNT118047																
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	3/26-18'	.XXX ± 0.10/.004	.XX ± 0.20/.010	.X ± 0.30/.012	X ± 1"									

CIVILUX CORP
 2018.03.29
 ISSUED

TITLE: D-SUB WITH PCB MOUNT
(8.1mm) FEMALE CONNECTOR

瀚荃股份有限公司
CviLux Corporation

DRAWING NO. **CD6101SF** PART NO. **CD61**S*1****
SCALE 2 / 1 SHEET 1 OF 1