





CH75 Series 2.00mm(.079") Dual Row Dual Bodies Pin Headers

- Mates with CB74, CB78
- Lead Free soldering process available


RoHS Compliant

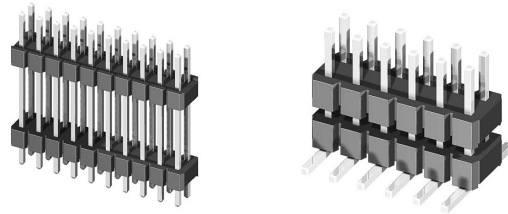


A = 2.0 x No. of Spaces
 B = A + 2.0
 DIM. E = 4.0 min.
 Pin overall length 30.0 max.

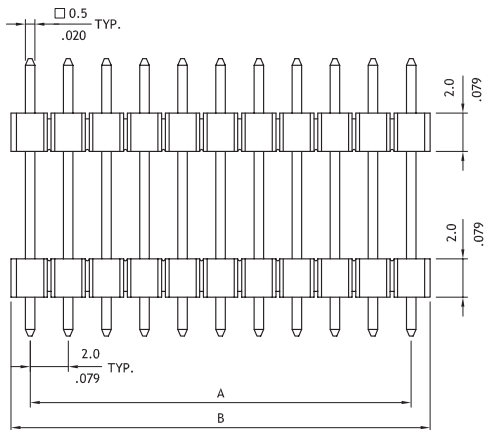

Option Code	Pin Dimension		
	C	D	E
00	4.0(.157)	2.50(.098)	11.60(.457)
01	3.55(.140)	2.55(.100)	9.55(.376)
02	4.0(.157)	2.50(.098)	9.30(.366)






Recommended P.C. Board Layout

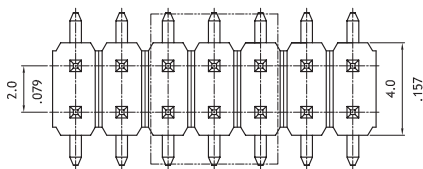

A = 2.0 x No. of Spaces
 B = A + 2.0
 DIM. E = 4.0 min.
 Pin overall length 30.0 max.

Option Code	Pin Dimension			
	C	D	E	F
00	4.0(.157)	0.77(.030)	4.00(.157)	6.50(.256)
01	4.0(.157)	0.77(.030)	11.00(.433)	6.50(.256)
02	4.0(.157)	0.77(.030)	8.00(.315)	6.50(.256)

HN2X5L-12.7MM-2.0 SMD

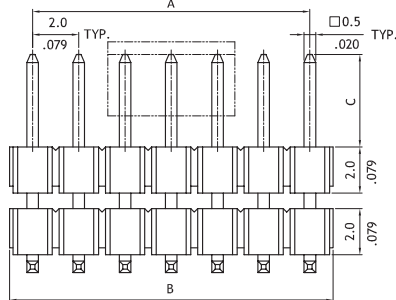

Recommended P.C. Board Layout

Ordering Code

1 CH **7** **5** **2** **M** **1** **00** - **0** **0**

- 1** Series No.
- 2** Circuits: 04 to 80
- 3** Plating code: 2= Gold flash over Nickel
*Optional plating available but MOQ requested
- 4** Tail & Mounting Style: V= Vertical DIP Type
M= Vertical SMT Type
- 5** Insulator Color: 1= Black
- 6** Other options: 00= Standard
* See option code table
* Consult manufacturer for customized pin length
- 7** Pin size: 0= Original design
- 8** 0= Without Pick & Place Pad (Tube or PVC Tray)
P= With Pick & Place Pad (Tape & Reel)
*Code 7 and 8 for SMT type only