


**ORDER INFORMATION**

FC X X - 44 88 - 20624 - XX - XXX

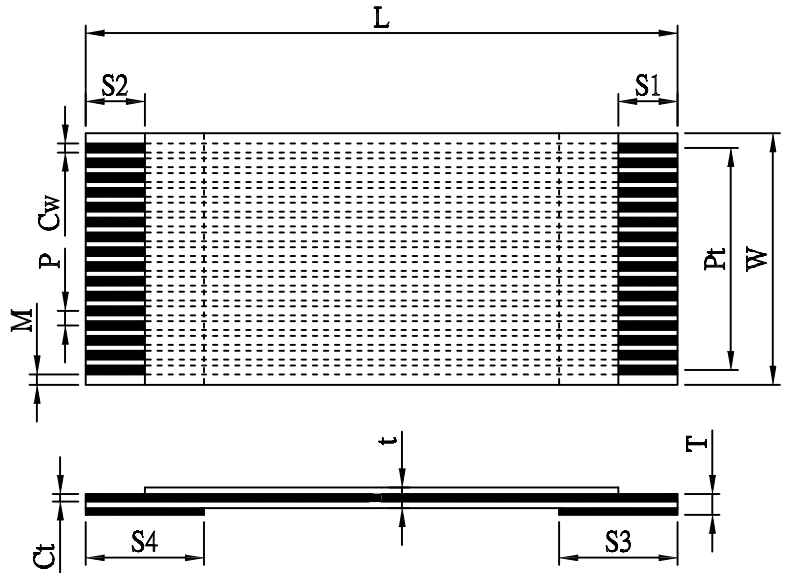

- cable length= min. 30mm
- number of pin
- UL standard= 20624:80°C, 60V  
2896:80°C, 30V  
20861:105°C, 60V
- support tape length(S3/S4)=6, 8, 10, 12, 15
- strip length(S1/S2)= 3, 4, 5, 6
- type= see below table.
- pitch=1:0.5mm, 2:1.0mm, 3:1.25mm, 4:2.54mm

TYPE			
A		C	
B		D	

Description	Abbr.	Formulation	Tolerance								
			P=0.3	P=0.5	P=0.8	P=1.0	P=1.25	P=1.27	P=2.00	P=2.54	
Pitch	P	Typical	±0.05	±0.05	±0.08	±0.08	±0.10	±0.10	±0.10	±0.10	
No. of Contacts			21~100	06~90	05~80	04~70	04~70	04~70	04~35	04~33	
Total Pitch	Pt	Px(n-1)	±0.05	±0.05	±0.08	±0.08	±0.12	±0.12	±0.12	±0.12	
Width	W	Px(n+1)	±0.12	±0.12	±0.15	±0.15	±0.20	±0.20	±0.20	±0.20	
Margin	M	P-(Cw x 1/2)	±0.08	±0.08	±0.13	±0.13	±0.18	±0.18	±0.18	±0.18	
Conduct Width	Cw	Typical	0.2	0.3	0.5	0.65	0.8	0.8	0.8	1.27	
Conduct Thickness	Ct	Typical	0.035 / 0.05 / 0.1								
Total(Cable) Length	L	Typical	Over 30mm								
Strip Length	S1/S2	Typical	3/4/5/6								
Support Tape Length	S3/S4	Typical	6/8/10/12/15								
Terminal Thickness	T	Typical	0.2/0.3±0.05mm								

					PART NO.	FCXX-XXXX-XXX	DATE	2010/9/15				
					DRAWING NO.	FCXX-XXXX-XXX	DRAWN	Andrew				
	Added 20861 specification	2015/07/14			CUSTOMER P/N		APPROVED	Brian				
REV.	DESCRIPTION	DATE	TITLE:	Flexible Flat Cable	REV.	A	TOLERANCE	.X ±0.25 .XX ±0.20	SCALE	1:1	UNIT	mm