


## SPK4

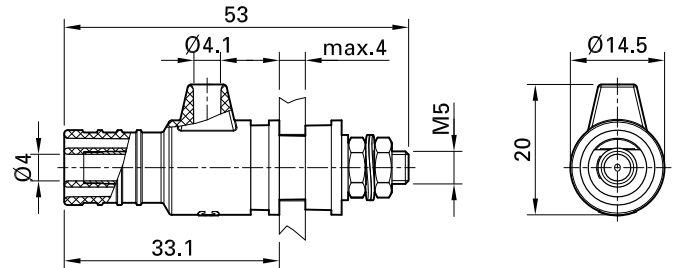

Item number 23.0410-\*

Insulated, with Ø 4 mm rigid socket accepting spring-loaded Ø 4 mm plugs with rigid insulating sleeve. Ø 3.2 mm cross hole for quick wire connection. Brass. The binding post is screwed into pre-drilled panels of plastic, metal, etc. Connection: Threaded bolt M5.

Technical data	
Diameter of plug system	4 mm
Rated Values	600 V, CAT II, 32 A
Surface treatment electrical contact	Au
Base material electrical contact	CuZn
Colours *	21 22
Thread	M5
Test accessory acc. to	IEC EN 61010-031