


## KS4-14LA/N

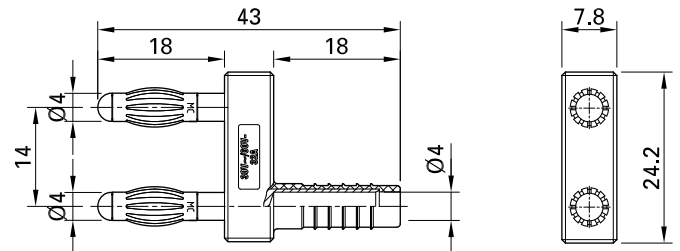

Item number 20.1010-\*

Insulated, Ø 4 mm, made of brass. Equipped with spring-loaded MULTILAM to ensure vibration-proof contacts – ideal use is in the automotive field for test drives and servicing. Ø 4 mm rigid socket in insulator accepting spring-loaded Ø 4 mm plugs with rigid insulating sleeve.

Plug spacing: 14 mm.

#### Technical data

Diameter of plug system	4 mm
Rated Values	30 VAC, 32 A / 60 VDC, 32 A
Surface treatment electrical contact	Ni
Base material electrical contact	CuZn
Colours *	<b>21</b>
Temperature range	+5...+40°C
Plug spacing	14 mm
Test accessory acc. to	IEC EN 61010-031
RoHS Compliant	true