


Silicone Insulator Heat Sink Pad

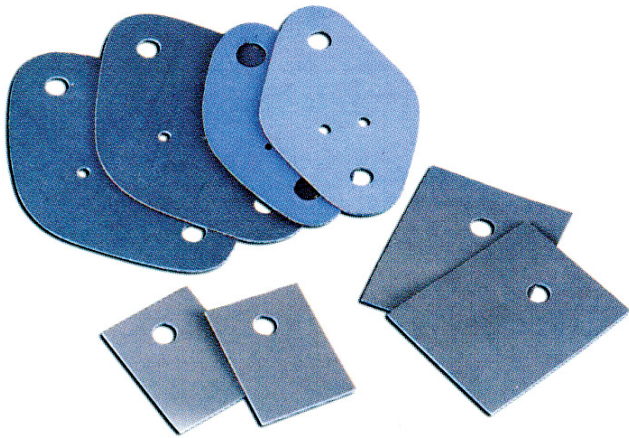


CHARACTERISTIC:

Insulation, heat sink, anti-friction, flame retardation, anti-Compression and RoHS compliance.


USAGE:

In replacement of mica sheets for convenience. Products applications such as electrical appliances, electronic devices, car mechanical machinery are for heat sink, insulating purpose. Also, dimensions and shapes vary depend on the application and specification.




TYPE-1

Dimension (mm)									
A	19	40	15	30	25	22	10	38	32
B	36	40	23	30	28	120	22	113	32

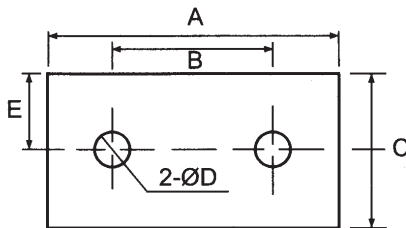


TYPE-2

Dimension (mm)						
A	87	60	44	28	55	28
B	45	30	33	21	20	11.5
C	27	21	17	14	25	25
D	4	4	3.5	3	4.5	3.5
E	13.5	10.5	5.5	7	10	7.5




TO-3

Dimension (mm)								
A	B	C	D	E	F	G	H	I
42	30	14.5	3.0	11.0	29	1.5	2.0	6



TO-220

Dimension (mm)			
A	B	C	D
13	18	4.5	3
13	19	5	3



TO-3P

Dimension (mm)			
A	B	C	D
20	25	7	3
20	25	8	3

Remarks:

The dimension tolerance between 0 to 10mm is ± 0.1 mm.

The dimension tolerance between 10mm to 100mm is ± 0.2 mm.

The dimension tolerance over 100mm is ± 0.3 mm.

The thickness is 0.3mm ~ 1mm, the tolerance between is ± 0.03 mm.

Dimension could be made upon customer's request.